



Cell Type UF504547F

Specifications

		W	T
		H	
Dimensions(Typ.) of Bare Cell	T*	4.70mm	
	W	44.75mm	
	H	46.30mm	
	w	5.6mm	


Nominal Capacity	Min.1240mAh
Nominal Voltage	3.7V
Charging Method	Constant Current -Constant Voltage
Charging Voltage	4.2V
Charging Current	Std. 1240mA
Charging Time	3hrs.
Ambient Temperature	Charge 0 ~ +40°C
	Discharge -20 ~ +60°C
	Storage -20 ~ +50°C
Weight (Max.)	25.0g
Dimensions (Max.)	(T)** 5.00mm
	(W) 44.90mm
	(H) 46.60mm
Volumetric Energy Density	438Wh/l
Gravimetric Energy Density	183Wh/kg

*Discharged State after Assembling


**The maximum thickness of the standard shipment charging condition

Typical Characteristics

Discharge rate characteristics

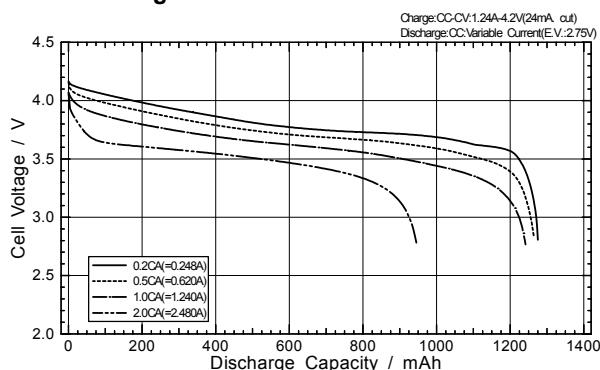

Discharge temperature characteristics

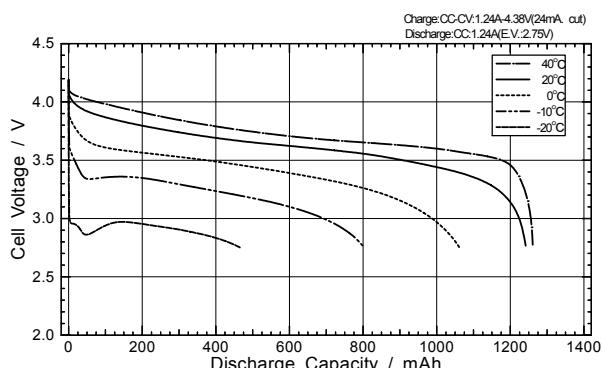

Charge characteristics

