


# Ultra Fast Recovery Rectifiers UFT1210 – UFT1220

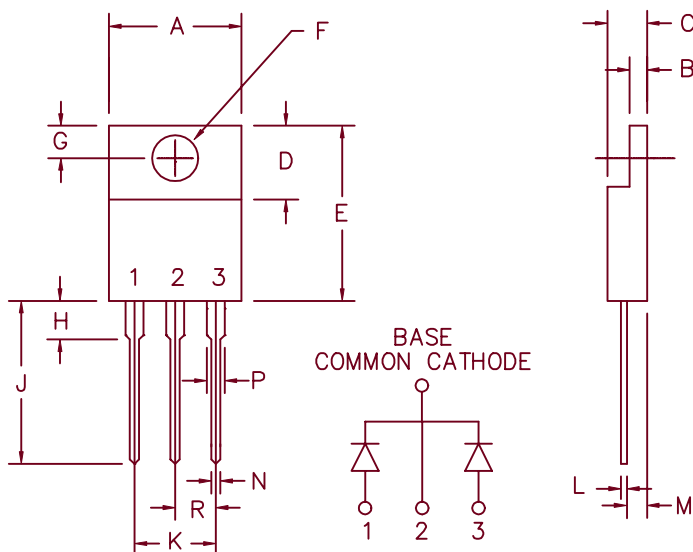

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.550	.650	13.97	16.51	
F	.139	.161	3.53	4.09	Dia.
G	.100	.135	2.54	3.43	
H	---	.250	---	6.35	
J	.500	.580	12.70	14.73	
K	.190	.210	4.83	5.33	
L	.014	.022	.357	.559	
M	.080	.115	2.03	2.92	
N	.015	.040	.380	1.02	
P	.045	.070	1.14	1.78	
R	.090	.110	2.29	2.79	

## PLASTIC TO-220AB

Microsemi Catalog Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
UFT1210	100V	100V
UFT1215	150V	150V
UFT1220	200V	200V

- Ultra Fast Recovery Rectifier
- 175°C Junction Temperature
- $V_{RRM}$  100 to 200 Volts
- 2 x 6 Amp current rating
- trr 30 nsec maximum

## Electrical Characteristics

Average forward current per pkg	$I_{F(AV)}$ 12 Amps	$T_C = 165^\circ\text{C}$ , Square wave, $R_{\theta JC} = 1.0^\circ\text{C/W}$
Average forward current per leg	$I_{F(AV)}$ 6 Amps	$T_C = 165^\circ\text{C}$ , Square wave, $R_{\theta JC} = 2.0^\circ\text{C/W}$
Maximum surge current	$I_{FSM}$ 125 Amps	8.3ms, half sine, $T_J = 175^\circ\text{C}$
Max. peak forward voltage	$V_{FM}$ 1.2 Volts	$I_{FM} = 6\text{A}$ , $T_J = 25^\circ\text{C}^*$
Max. reverse recovery time	$I_{RM}$ 10 $\mu\text{A}$	$V_{RRM}$ , $T_J = 25^\circ\text{C}$
Max. peak reverse current	$t_{RR}$ 70 ns	1/2A, 1A, 1/4A, $T_J = 25^\circ\text{C}$
Typical junction capacitance	$C_J$ 56 pF	$V_R = 10\text{V}$ , $f = 1\text{MHz}$ , $T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$  Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Operating junction temp range	$T_J$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Max thermal resistance per leg	$R_{\theta JC}$	$2.0^\circ\text{C/W}$ Junction to case
Max thermal resistance per pkg.	$R_{\theta JC}$	$1.0^\circ\text{C/W}$ Junction to case
Mounting torque		10–15 inch pounds
Weight		.08 ounces (2.3 grams) typical

# UFT1210 – UFT1220

Figure 1  
Typical Forward Characteristics – Per Leg

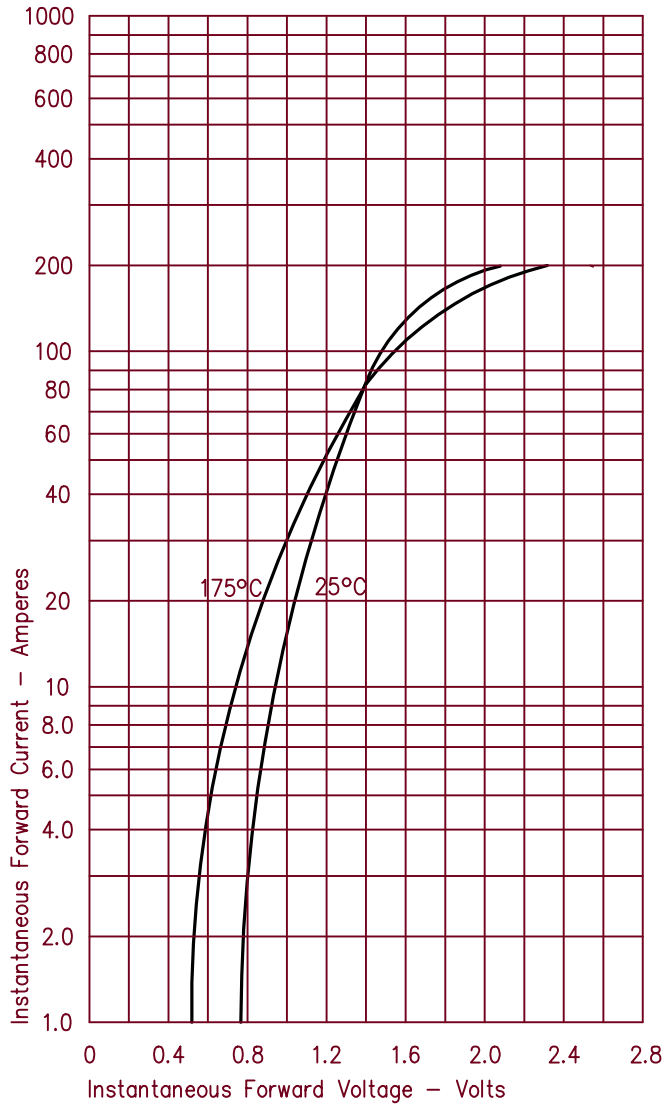


Figure 3  
Typical Junction Capacitance – Per Leg

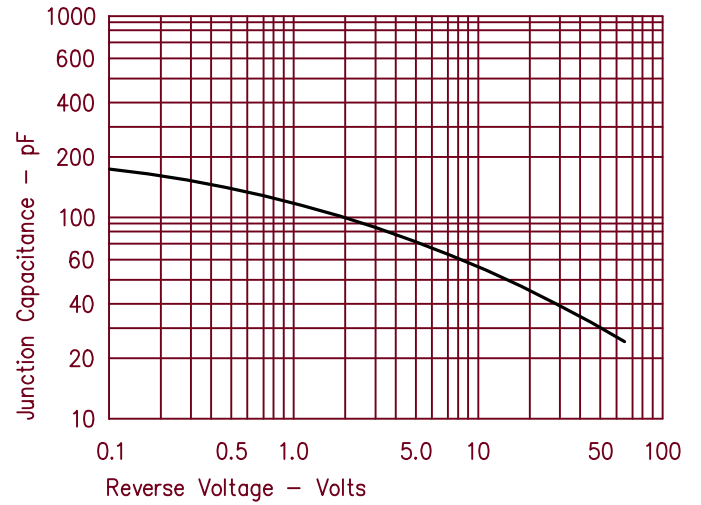


Figure 4  
Forward Current Derating – Per Leg

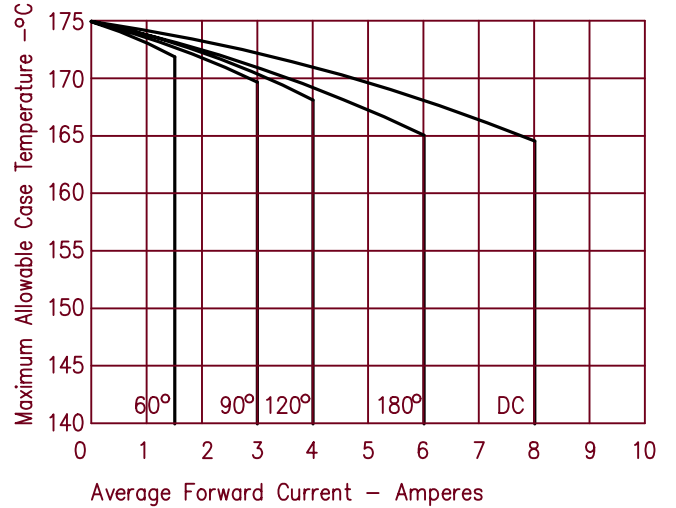


Figure 2  
Typical Reverse Characteristics – Per Leg

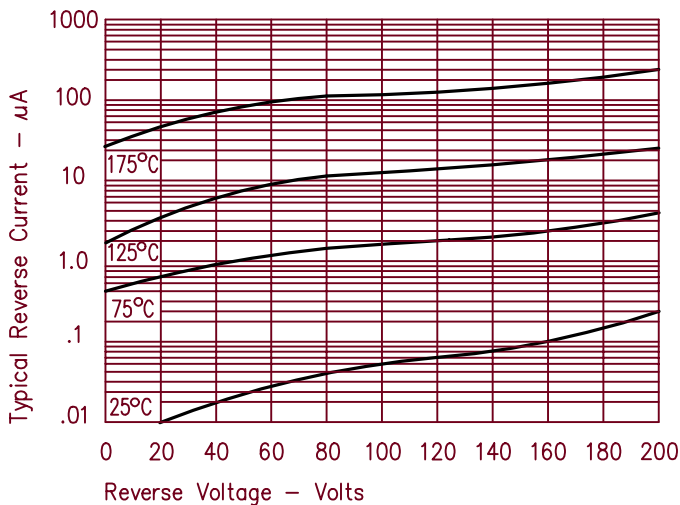


Figure 5  
Maximum Forward Power Dissipation – Per Leg

