

SUPER FAST RECTIFIER


VOLTAGE RANGE: 50 --- 800 V
CURRENT: 1.0 A

FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ low leakage current
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ Plastic package has underwriters laboratory flammability classification 94v-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

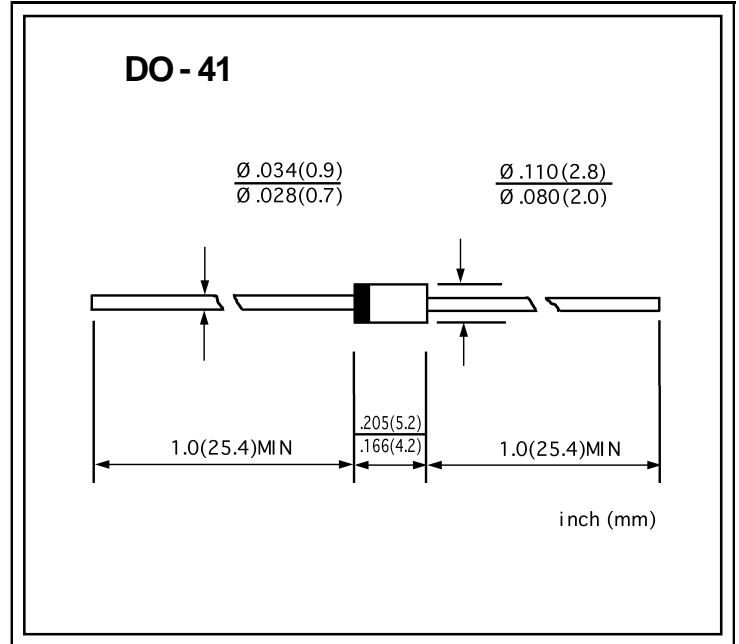

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | | UGP 10A | UGP 10B | UGP 10D | UGP 10F | UGP 10G | UGP 10J | UGP 10K | UNITS | |
|-------------------------------------------------------------------------------------------------------------|-----------------|------------------|---------|---------|---------|---------|---------|---------|------------|--------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | V | |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | V | |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | V | |
| Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$ | $I_{F(AV)}$ | 1.0 | | | | | | | A | |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$ | I_{FSM} | 30.0 | | | | | 25.0 | | A | |
| Maximum instantaneous forward voltage @ 1.0A | V_F | 0.95 | | | 1.25 | | 1.7 | 2.2 | V | |
| Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$ | I_R | 5.0 | | | | | 50.0 | | μA | |
| Maximum reverse recovery time (Note1) | t_{rr} | 35 | | | | | | | | ns |
| Typical junction capacitance (Note2) | C_J | 17 | | | | | | | | pF |
| Typical thermal resistance (Note3) | $R_{\theta JA}$ | 50 | | | | | | | | $^\circ C/W$ |
| Operating junction temperature range | T_J | - 55 ----- + 150 | | | | | | | $^\circ C$ | |
| Storage temperature range | T_{STG} | - 55 ----- + 150 | | | | | | | $^\circ C$ | |

NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient.

www.galaxycn.com

FIG.1 – FORWARD DERATING CURVE

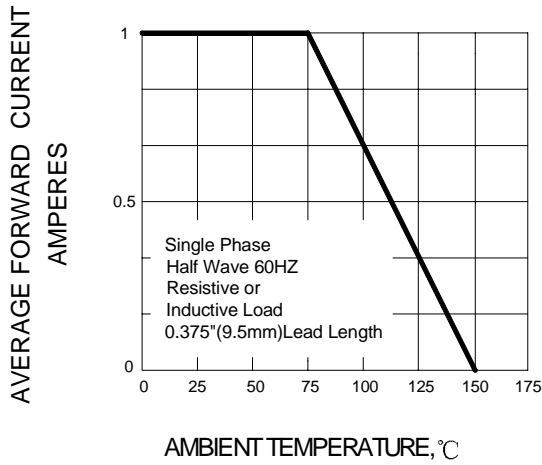


FIG.2 – PEAK FORWARD SURGE CURRENT

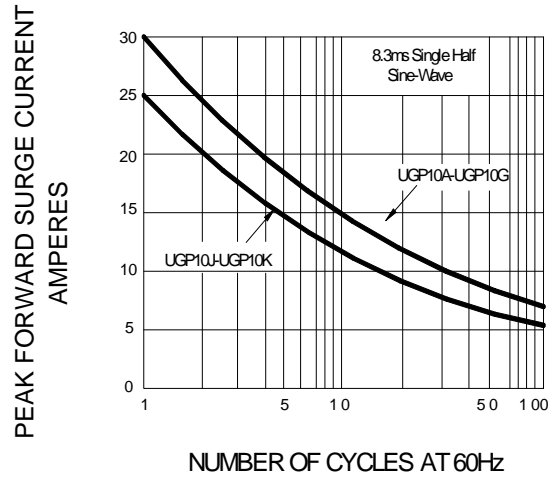


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

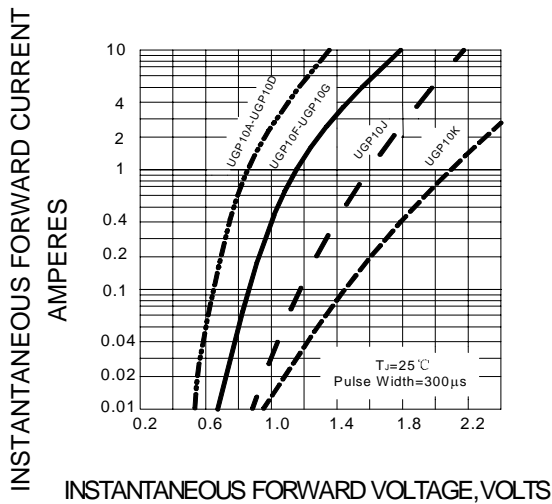


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

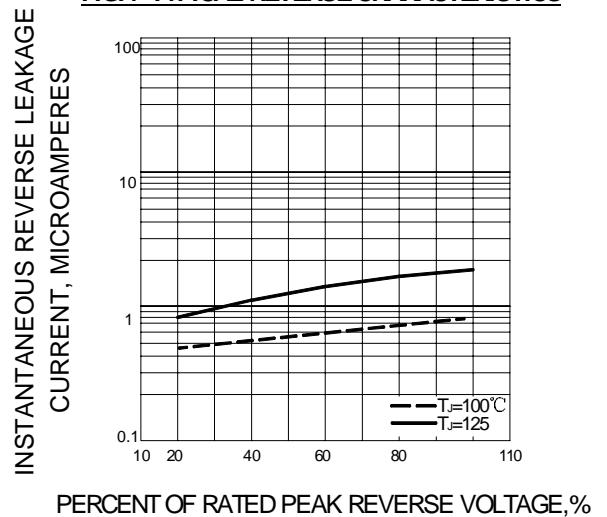


FIG.5 – TYPICAL JUNCTION CAPACITANCE

