

UGP10A-UGP10K

Super Fast Rectifiers

VOLTAGE RANGE: 50 --- 800 V

CURRENT: 1.0 A


Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ low leakage current
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ Plastic package has underwriters laboratory flammability classification 94v-0

Mechanical Data

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

DO - 41

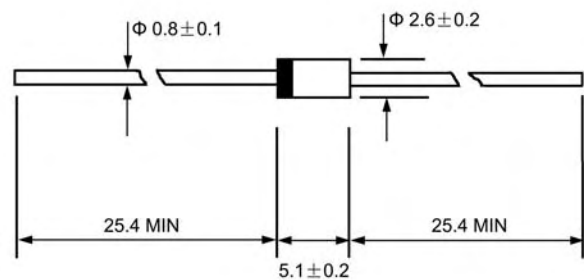

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate by 20%.

		UGP 10A	UGP 10B	UGP 10D	UGP 10F	UGP 10G	UGP 10J	UGP 10K	UNITS	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	V	
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	V	
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	V	
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0							A	
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	I_{FSM}	30.0					25.0		A	
Maximum instantaneous forward voltage @ 1.0A	V_F	0.95			1.25		1.7	2.2	V	
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	5.0					50.0			μA
Maximum reverse recovery time (Note1)	t_{rr}	35								ns
Typical junction capacitance (Note2)	C_J	17								pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50								$^\circ\text{C/W}$
Operating junction temperature range	T_J	- 55 ----- + 150							$^\circ\text{C}$	
Storage temperature range	T_{STG}	- 55 ----- + 150							$^\circ\text{C}$	

NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient.

Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

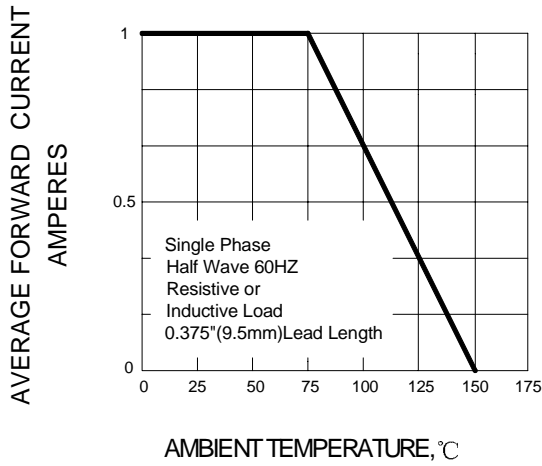


FIG.2 – PEAK FORWARD SURGE CURRENT

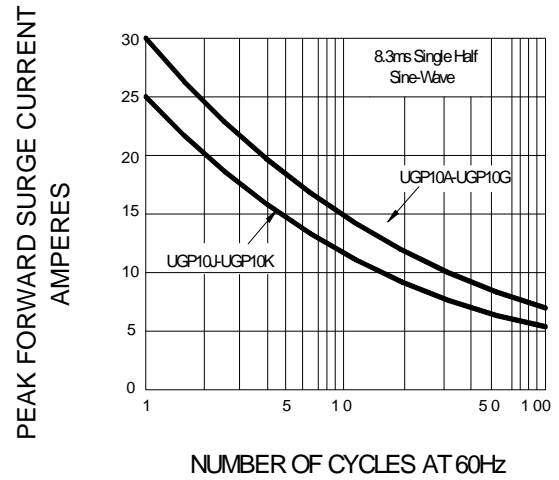


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

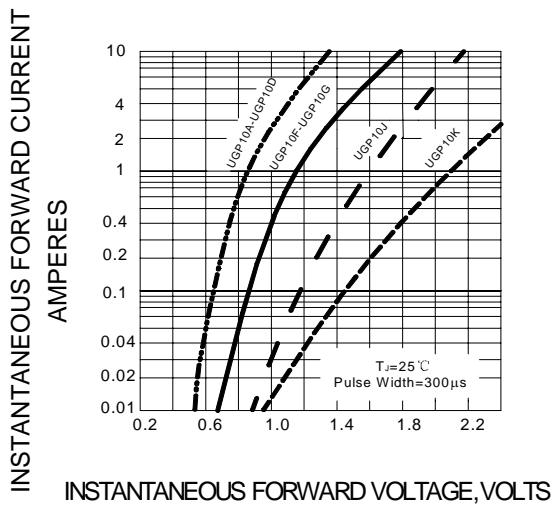


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

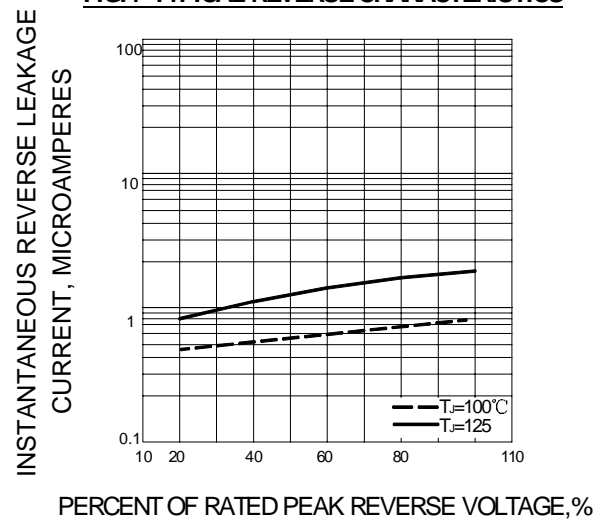


FIG.5 – TYPICAL JUNCTION CAPACITANCE

