


UL2464

BORT cable

RoHS & REACH compliant

环保引领未来

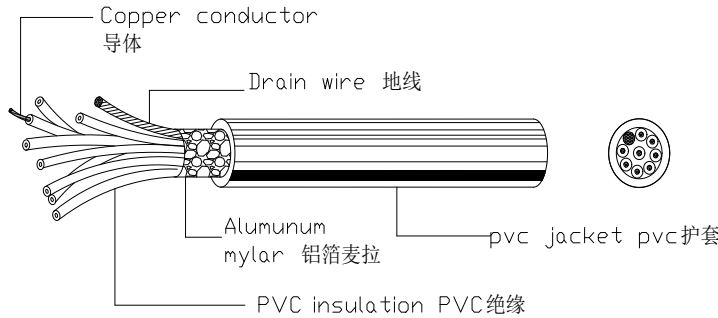

PRODUCT DESCRIPTION

- ★ Rated temperature: 80°C
- ★ Rated voltage: 300V
- ★ According to: UL Subject 758, UL1581, C22.2
- ★ Solid or stranded, tinned or bare copper conductor
- ★ PVC insulation
- ★ Cores cabled under AL-MYLAR shield
- ★ Tinned or bare stranded copper drain wire
- ★ Tinned or bare stranded copper wire overall more than 80% coverage braided shield
- ★ PVC jacket
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ Sound broadcast, audio, instrumentation & computer

产品说明

- ★ 额定温度: 80°C
- ★ 额定电压: 300V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合镀锡或裸铜丝
- ★ 聚氯乙烯绝缘
- ★ 芯线集合后铝箔麦拉屏蔽
- ★ 镀锡或裸铜丝绞合地线
- ★ 镀锡或裸铜丝编织, 80%以上遮蔽率
- ★ 聚氯乙烯护套
- ★ 通过UL VW-1以及CSA FT1垂直燃烧测试
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于广播, 视听设备, 计算机线等

Conductor		Finished product			
AWG/NO.OFCOND	NO.of Cond	Insulated Thick. mm	Braid shield m/n/d	Jacket Thick. mm	Outside Thick. mm
	No./mm				
24×2C	11/0.16	0.25	16/4/0.10	0.80	4.35
24×3C	11/0.16	0.25	16/4/0.10	0.80	4.50
24×4C	11/0.16	0.25	16/5/0.10	0.80	4.80
24×5C	11/0.16	0.25	16/6/0.10	0.80	5.10
24×6C	11/0.16	0.25	16/6/0.10	0.80	5.45
24×7C	11/0.16	0.25	16/6/0.10	0.80	5.50
22×2C	17/0.16	0.25	16/5/0.10	0.80	4.75
22×3C	17/0.16	0.25	16/6/0.10	0.80	4.95
22×4C	17/0.16	0.25	16/6/0.10	0.80	5.30
22×5C	17/0.16	0.25	16/7/0.10	0.80	5.65
22×6C	17/0.16	0.25	16/8/0.10	0.80	6.05
22×7C	17/0.16	0.25	16/8/0.10	0.80	6.10

博尔特（漳州）电缆有限公司