
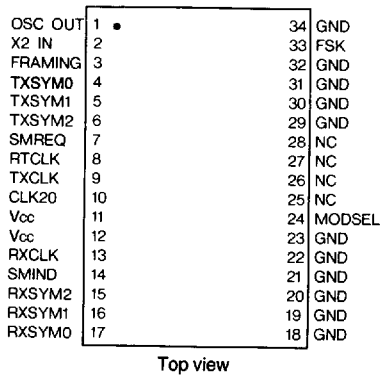
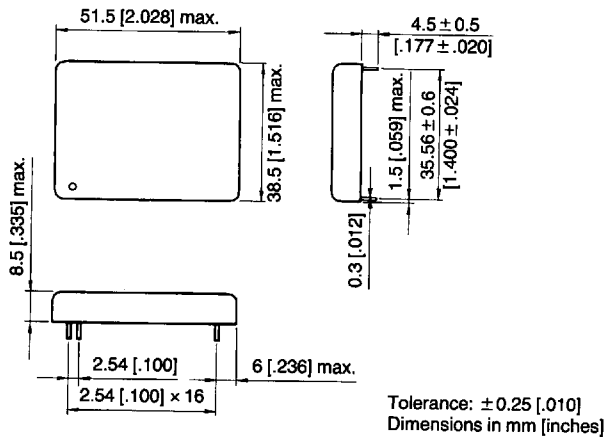


**LAN CARRIER BAND MODULES, ULA SERIES [IEEE802.4 (Token bus carrier band)]**

TDK's LAN carrier band modem ULA101 is used for interfacing the transmission line in the LAN, especially for FA and CIM, and the terminal equipment. It consists of the modem IC, pulse transformer and peripheral circuit.



**TEMPERATURE RANGE**

	(°C) [°F]
Operating	0 to 70 [0 to 158]
Storage	-20 to +80 [-4 to +176]

Part No.	Rated Input voltage Vcc (Vdc)	Input voltage range Vcc (Vdc)	Weight (g) max.
ULA101	5	4.75 to 5.25	27

**BLOCK DIAGRAM**

