

Miniature Resistance Weld Crystal

The UM1J series is a AT-cut crystal housed in a miniature resistance weld package that provides for an excellent hermetic seal and frequency aging. This high quality crystal offers a smaller footprint in a wide frequency range.



Specifications:

Frequency Range:	6.0 MHz ~ 45 MHz	Fundamental
	25 MHz ~ 200 MHz	Overtone

Operating Temperature:	0°C ~ +50°C	-A
	-10°C ~ +60°C	-B
	-20°C ~ +70°C	-C
	-40°C ~ +85°C	-L

Storage Temperature:	-55°C ~ +125°C	
-----------------------------	----------------	--

Frequency Tolerance: (at 25°C)	± 50 ppm	-50
	± 30 ppm	-30
	± 20 ppm	-20
	± 10 ppm	-10

Frequency Stability: (over temperature range)	± 50 ppm	-50
	± 30 ppm	-30
	± 20 ppm	-20
	± 10 ppm	-10

Circuit Condition:	10 pF ~ 32 pF or series	
---------------------------	-------------------------	--

Equivalent Series Resistance:	Maximum resistance corresponds to frequency. Please see ESR table.	
--------------------------------------	--	--


Drive Level:	100 μW max	
---------------------	------------	--

Shunt Capacitance:	7 pF max	
---------------------------	----------	--

Aging:	± 3 ppm max per year	
---------------	----------------------	--

Optional Features:	Fundamental	-F
	3 rd , 5 th , 7 th O.T.	-3,5,7
	Tape & Reel	-TR

UM-1J

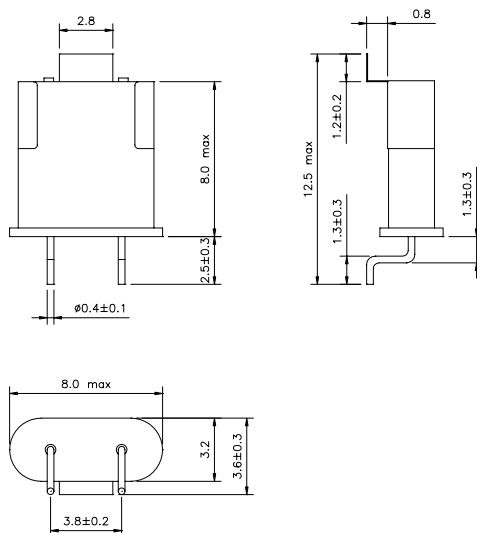

All dimensions are in mm

Ordering Information

Product name + CL + Operating Temperature Range + Tolerance + Stability + Other Code + Frequency.

i.e. UM1J-20-C-30-30-F-24.000MHz

Note:

- Other frequencies, tolerances, stabilities, and operating temperature ranges available. Consult VTC Support for specific requirements.
- Not all combinations of the above tolerances, stabilities, and temperature ranges are available. Consult VTC Support if your requirement is not standard.
- All specifications subject to change without notice.