

## 20V P-Channel Power MOSFET

### UM8515 SOT23-6

#### General Description

The UM8515 is a low threshold P-channel MOSFET, have extremely low on-resistance. This benefit provides the designer with an extremely efficient device for use in battery and load management applications. The devices use a space-saving, small-outline SOT23-6 package.

#### Applications


- Battery Packs
- Battery-Powered Portable Equipment
- Cellular and Cordless Telephones

#### Features

- Drain-Source Voltage (Max): -20V
- Low On-Resistance:  
90mΩ@V<sub>GS</sub>=-4.5V  
110mΩ@V<sub>GS</sub>=-2.5V
- Continuous Drain Current (Max): -2A@25°C

#### Pin Configurations

#### Top View

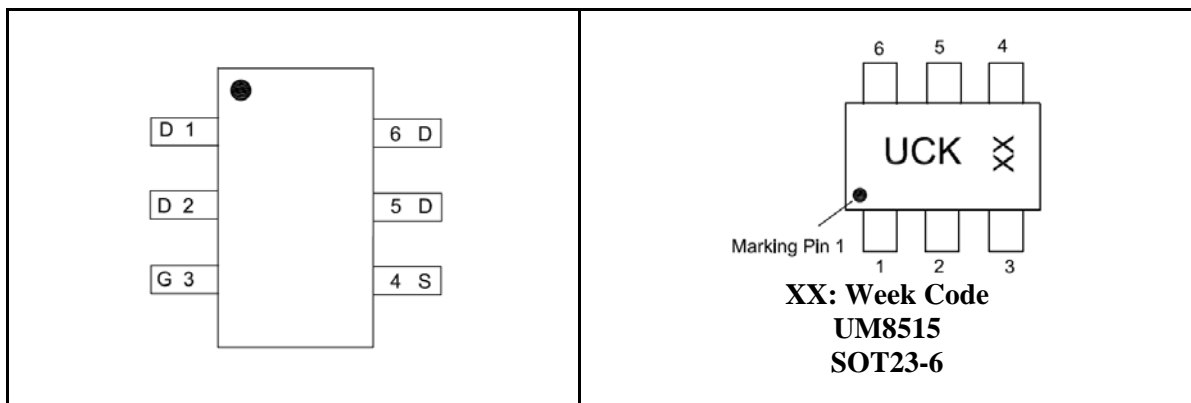

#### Ordering Information

Part Number	Packaging Type	Marking Code	Shipping Qty
UM8515	SOT23-6	UCK	3000pcs/7 Inch Tape & Reel


#### Absolute Maximum Ratings

Symbol	Parameter	Value	Units
V <sub>DSS</sub>	Drain-Source Voltage	-20	V
V <sub>GS</sub>	Gate-Source Voltage	±8	V
I <sub>D</sub>	Continuous Drain Current	-2.0	A
I <sub>DM</sub>	Drain Current Pulsed	-10	A
P <sub>D</sub>	Power Dissipation	0.7	W
T <sub>J</sub>	Junction Temperature	-55~150	°C
T <sub>stg</sub>	Storage Temperature	-55~150	°C
R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient	100	°C/W


**Electrical Characteristics (T<sub>J</sub>=25°C, unless otherwise noted)**

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =-250μA	-20			V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =-20V, V <sub>GS</sub> =0V			-1	μA
I <sub>GSS</sub>	Gate-to-Source Leakage Current	V <sub>GS</sub> =±8V, V <sub>DS</sub> =0V			±100	nA
<b>On Characteristics</b>						
R <sub>DS(ON)</sub>	Static Drain-to-Source On-Resistance	V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-2.8A		90	110	mΩ
		V <sub>GS</sub> =-2.5V, I <sub>D</sub> =-2A		110	150	
V <sub>GS(TH)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> =-250μA	-0.4	-0.6	-1	V
g <sub>fs</sub>	Forward Transconductance	V <sub>DS</sub> =-10V, I <sub>D</sub> =-2.7A		7.0		S
<b>Dynamic Characteristics</b>						
C <sub>iss</sub>	Input Capacitance	V <sub>GS</sub> =0V, V <sub>DS</sub> =-15V, f=1.0MHz		480		pF
C <sub>oss</sub>	Output Capacitance			46		
C <sub>rss</sub>	Reverse Transfer Capacitance			10		
<b>Switching Characteristics</b>						
Q <sub>g(TOT)</sub>	Total Gate Charge	V <sub>DS</sub> =-6V, V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-2.8A		7.2		nC
Q <sub>g(TH)</sub>	Threshold Gate Charge			2.2		
Q <sub>gs</sub>	Gate-Source Charge			2.2		
Q <sub>gd</sub>	Gate-Drain Charge			1.2		
td(on)	Turn-on Delay Time	V <sub>GS</sub> =-4.5V, V <sub>DS</sub> =-6V, R <sub>L</sub> =6Ω, R <sub>G</sub> =6Ω		38		ns
tr	Rise Time			25		
td(off)	Turn-off Delay Time			43		
tf	Fall Time			5		
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
V <sub>SD</sub>	Forward Diode Voltage	V <sub>GS</sub> =0V, I <sub>S</sub> =-1A		-0.7	-1.4	V


**Typical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**

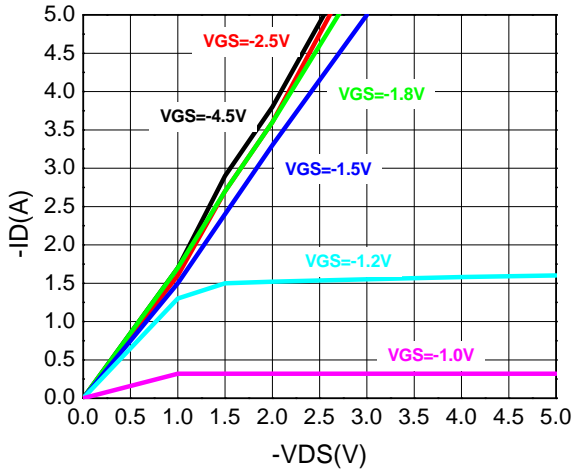


**Fig1. Typical Output Characteristics**

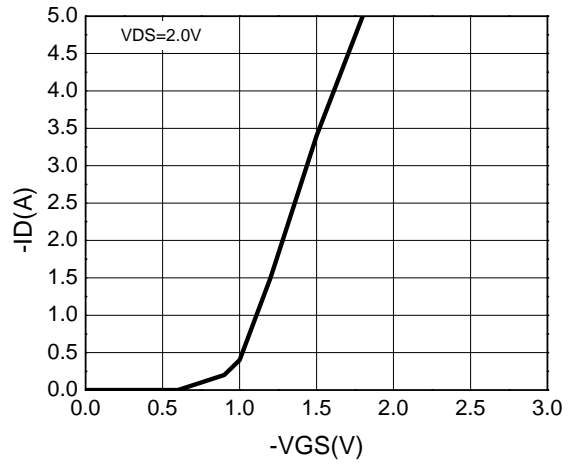


**Fig2. Typical Transfer Characteristics**

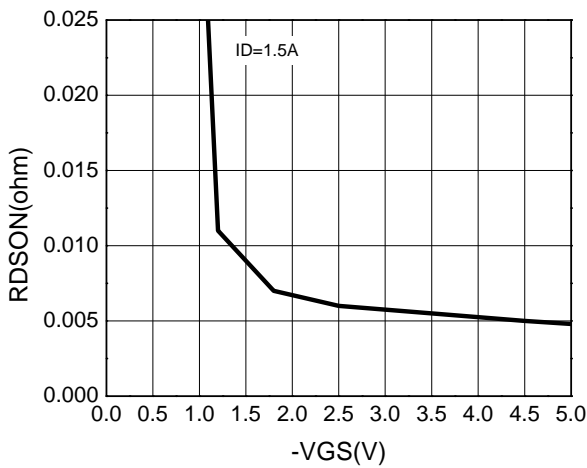


**Fig3. On-Resistance vs. Gate-to-Source Voltage**

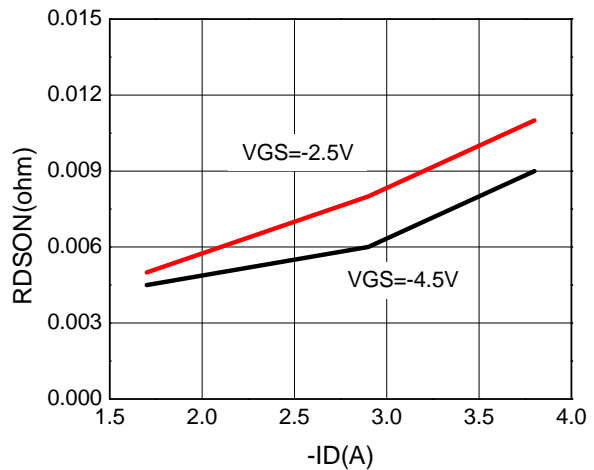

**Fig4. On-Resistance vs. Drain Current**

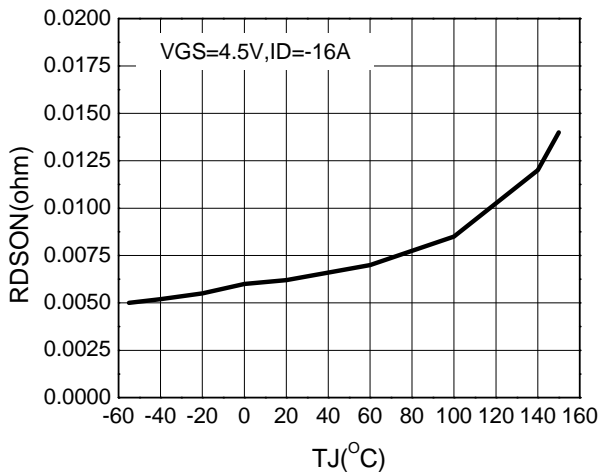

**Fig5. On-Resistance vs. Junction Temperature**

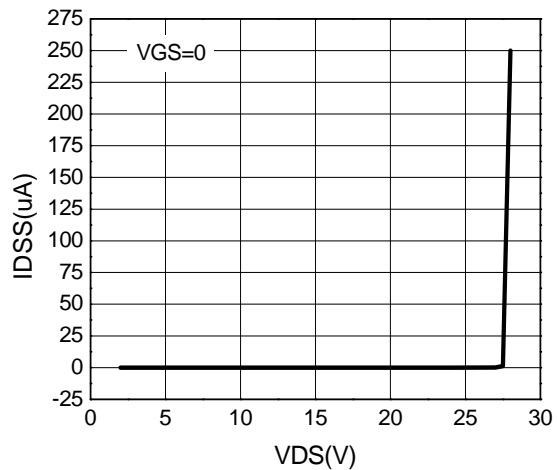


**Fig6.  $I_{DSS}$  vs. Drain-to-Source Voltage**


## Package Information

### UM8515 SOT23-6


#### Outline Drawing

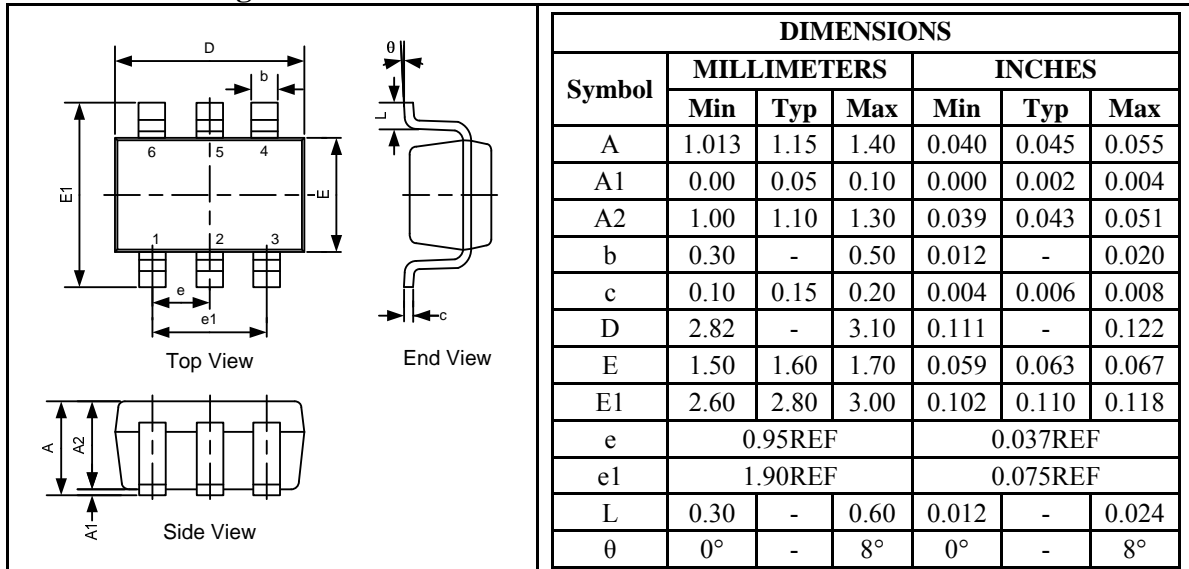

#### Land Pattern

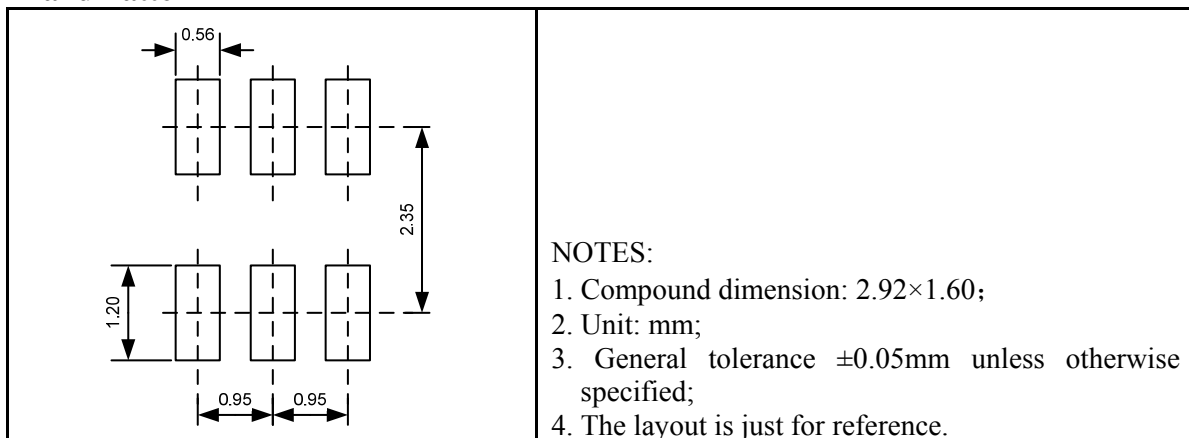

#### Tape and Reel Orientation

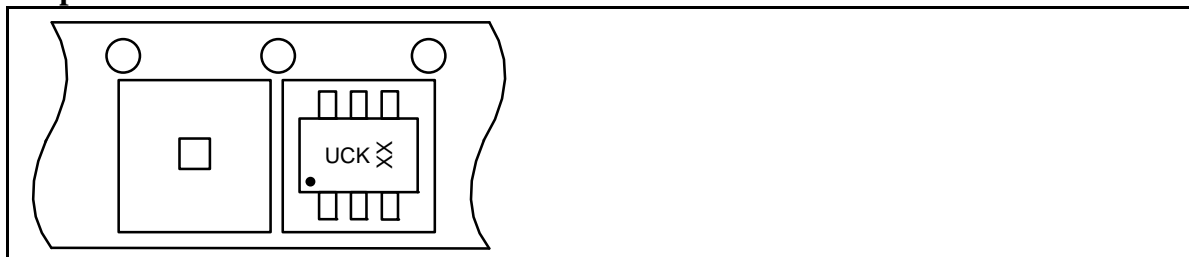

---

## **GREEN COMPLIANCE**

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

[http://www.union-ic.com/index.aspx?cat\\_code=RoHSDeclaration](http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration)

## **IMPORTANT NOTICE**

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.