

***90mΩ, 1.5A High-Side Power Switches with Flag*****UM9711S SOT23-5****UM9711S8 SOP8****UM9711AS8 SOP8****General Description**

The UM9711/UM9711A is a low voltage, single N-MOSFET high-side power switch, optimized for self-powered and bus-powered Universal Serial Bus (USB) applications. The UM9711/UM9711A is equipped with a charge pump circuitry to drive the internal MOSFET switch; the switch's low  $R_{DS(ON)}$ , 90mΩ, meets USB voltage drop requirements. The UM9711 provides a  $\overline{FLG}$  signal pin which is an N-Channel open drain MOSFET output. The flag output is available to indicate fault conditions to the local USB controller. The UM9711A doesn't have such function.

Additional features include soft-start to limit inrush current during plug-in, thermal shutdown to prevent catastrophic switch failure from high-current loads, under-voltage lockout (UVLO) to ensure that the device remains off unless there is a valid input voltage present. The maximum current is limited to typically 2.5A in dual ports in accordance with the USB power requirements, lower quiescent current as 40μA making this device ideal for portable battery-operated equipment. The UM9711 is available in SOT23-5 and SOP8 packages requiring minimum board space and smallest components while the UM9711A is available in SOP8 package.


**Applications**

- USB Bus/Self-Powered Hubs
- USB Peripherals
- ACPI Power Distribution
- PC Card Hot Swap
- Notebook, Motherboard PCs
- Battery-Powered Equipment
- Hot-Plug Power Supplies
- Battery-Charger Circuits

**Features**

- Compliant to USB Specifications
- Built-in N-MOSFET, Typical  $R_{DS(ON)}$ : 90mΩ
- Output can be Forced Higher than Input (Off-State)
- Low Supply Current:  
40μA Typical at Switch on State  
0.1μA Typical at Switch off State
- Guaranteed 1.5A Continuous Load Current
- Wide Input Voltage Range: 2.5V to 5.5V
- Open-Drain Fault Flag Output (UM9711S, UM9711S8)
- Hot Plug-in Application (Soft-Start)
- 1.7V Typical Under-Voltage Lockout (UVLO)
- Current Limiting Protection
- Thermal Shutdown Protection
- Reverse Current Flow Blocking (No Body Diode)

**Typical Application Circuit**

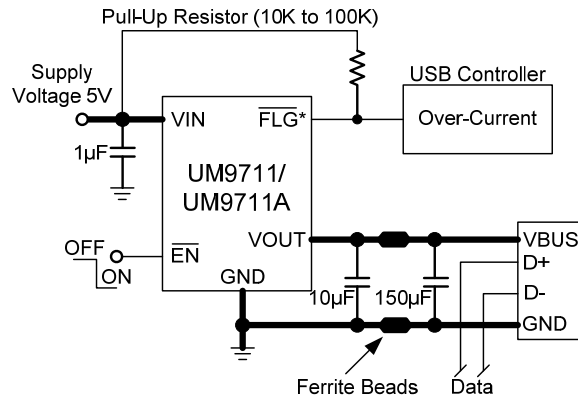

\*Only for UM9711S/UM9711S8.

**Pin Configurations**

**Top View**

<p><b>UM9711S</b></p>	<p><b>M: Month Code</b> <b>UM9711S</b> <b>SOT23-5</b></p>
<p><b>UM9711S8</b></p>	<p><b>XX: Week Code</b> <b>UM9711S8</b> <b>SOP8</b></p>
<p><b>UM9711AS8</b></p>	<p><b>XX: Week Code</b> <b>UM9711AS8</b> <b>SOP8</b></p>

**Pin Description**

Pin Number			Symbol	Function
UM9711S (SOT23-5)	UM9711S8 (SOP8)	UM9711AS8 (SOP8)		
1	5	-	$\overline{\text{FLG}}$	Open-Drain Fault Flag Output
2	1	1	GND	Ground
3	4	4	$\overline{\text{EN}}$	Chip Enable (Active Low)
4	2,3	2,3	VIN	Power Input Voltage
5	6,7,8	5,6,7,8	VOUT	Output Voltage

**Ordering Information**

Part Number	Packaging Type	Marking Code	Shipping Qty
UM9711S	SOT23-5	5D2	3000pcs/7Inch Tape & Reel
UM9711S8	SOP8	UM9711S8	2500pcs/13Inch Tape & Reel
UM9711AS8		UM9711AS8	

**Absolute Maximum Ratings (Note 1)**

Symbol	Parameter	Value	Unit	
$V_{\text{IN}}$	Supply Voltage on VIN	-0.3 to +6.5	V	
$V_{\overline{\text{EN}}}$	Voltages on Pin $\overline{\text{EN}}$	-0.3 to +6.5	V	
$V_{\overline{\text{FLG}}}$	Flag Voltage (UM9711S, UM9711S8)	6.5	V	
$P_{\text{D}}$	Continuous Power Dissipation	SOT23-5	400	mW
		SOP8	625	mW
$T_{\text{A}}$	Operating Ambient Temperature	-40 to +85	°C	
$T_{\text{J}}$	Operating Junction Temperature	+125	°C	
$T_{\text{STG}}$	Storage Temperature Range	-40 to +150	°C	
$T_{\text{L}}$	Maximum Lead Temperature for Soldering 10 Seconds	+260	°C	

Note 1. Stresses listed as the above "Absolute Maximum Ratings" may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibility to affect device reliability.


**Electrical Characteristics**

 ( $V_{IN}=5V$ ,  $C_{IN}=C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified)


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{IN}$	Input Voltage Range		2.5		5.5	V
$R_{DS(ON)}$	Switch on Resistance	$V_{IN}=5V$ , $I_{OUT}=1A$		90	110	m $\Omega$
$I_{SW\_ON}$	Switch on Supply Current	Switch On, $V_{OUT}=\text{Open}$		40	60	$\mu A$
$I_{SW\_OFF}$	Switch off Supply Current	Switch Off, $V_{OUT}=\text{Open}$		0.1	1	$\mu A$
$I_{LEAK}$	Output Leakage Current	$V_{EN}^- = 5V$ , $R_{LOAD}=0\Omega$		2.5	10	$\mu A$
$V_{IH}$	$\overline{EN}$ Threshold Logic-High Voltage	$V_{IN}=2V$ to $5.5V$ , Switch Off	1.7			V
$V_{IL}$	$\overline{EN}$ Threshold Logic-Low Voltage	$V_{IN}=2V$ to $5.5V$ , Switch On			0.8	V
$I_{EN}^-$	$\overline{EN}$ Input Current	$V_{EN}^- = 0V$ to $5.5V$		0.01	1.0	$\mu A$
$t_{ON\_RISE}$	Output Turn-On Rise Time	10% to 90% of $V_{OUT}$ Rising ( $R_{LOAD}=82\Omega$ )		400		$\mu s$
$I_{LIM}$	Current Limit	Current Ramp (<0.1A/ms) on $V_{OUT}$	1.6	2.5	3.2	A
$I_{SC\_FB}$	Short Circuit Fold-Back Current (Hysteresis)	$V_{OUT}=0V$ , Measured Prior to Thermal Shutdown		1.0		A
$R_{FLG}^-$	FLAG Output Resistance	$I_{SINK}=1mA$		100	400	$\Omega$
$I_{FLG\_OFF}^-$	FLAG Off Current	$V_{FLG}^- = 5V$		0.01	1	$\mu A$
$t_D$	FLAG Delay Time	From Fault Condition to $\overline{FLG}$ Assertion	5	12	20	ms
$V_{UVLO}$	Under-Voltage Lockout	$V_{IN}$ Increasing ( $I_{LOAD}=10mA$ )	1.3	1.7		V
$\Delta V_{UVLO}$	Under-Voltage Hysteresis	$V_{IN}$ Decreasing ( $I_{LOAD}=10mA$ )		0.1		V
$T_{SD}$	Thermal Shutdown Protection			140		$^\circ C$
$\Delta T_{SD}$	Thermal Shutdown Hysteresis			20		$^\circ C$

**Typical Operating Characteristics**


**Switch on Resistance vs. Input Voltage**  
 $I_{OUT}=1A, C_{IN}=C_{OUT}=1\mu F$

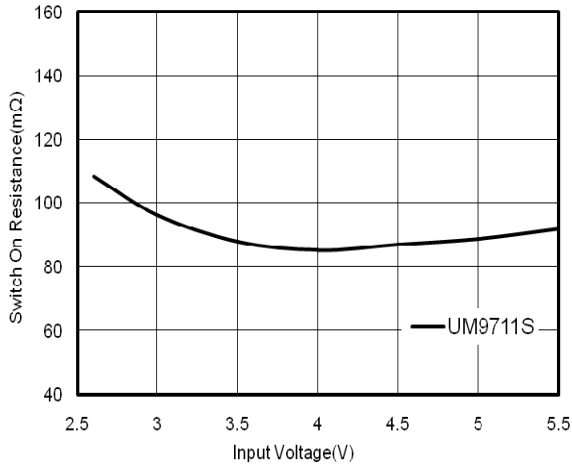


**Supply Current vs. Input Voltage**  
 $R_L=open, V_{EN}=0V, C_{IN}=C_{OUT}=1\mu F$

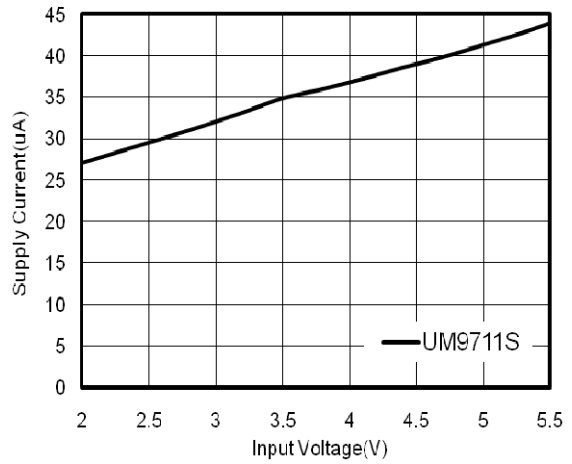


**$\overline{EN}$  Pin Threshold Voltage vs. Input Voltage**  
 $I_{LOAD}=100mA, C_{IN}=C_{OUT}=1\mu F$

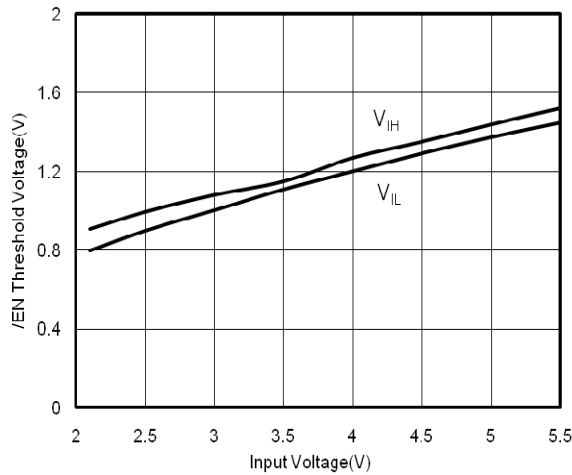


**Output Voltage vs. Output Current**  
 $V_{IN}=5V, C_{IN}=C_{OUT}=1\mu F$

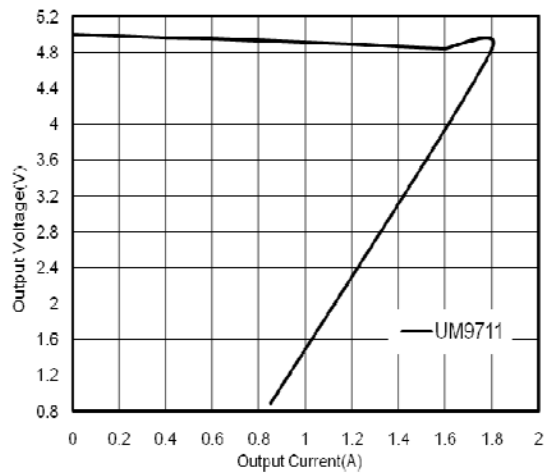

**Turn-On Response**  
 $V_{IN}=5V, R_L=82\Omega, C_{IN}=C_{OUT}=1\mu F(UM9711S)$

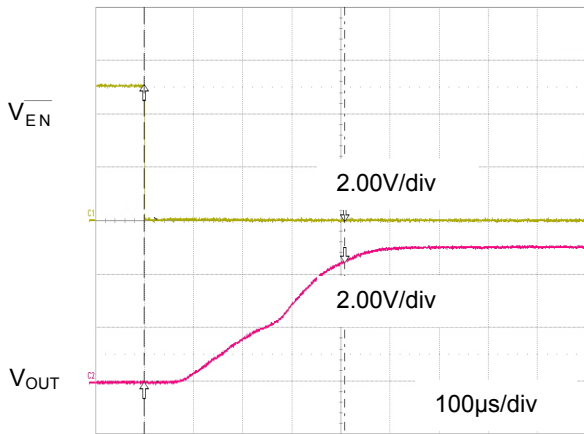

**Turn-Off Response**  
 $V_{IN}=5V, R_L=82\Omega, C_{IN}=C_{OUT}=1\mu F(UM9711S)$

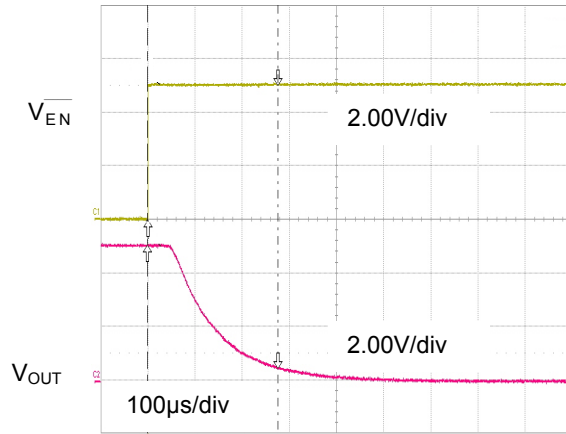

## Function Description

### Reverse Current Protection

The UM9711/UM9711A prevents reverse current flow if  $V_{OUT}$  is externally forced to a higher voltage than  $V_{IN}$  when the output is disabled ( $V_{EN} > 1.7V$ ).

### Soft Start for Hot Plug-In Applications

In order to eliminate the upstream voltage droop caused by the large inrush current during hot-plug events, the “soft-start” feature effectively isolates the power source from extremely large capacitive loads, satisfying the USB voltage droop requirements.

### Fault Flag (UM9711S, UM9711S8)

The UM9711 provides a  $\overline{FLG}$  signal pin which is an N-Channel open drain MOSFET output. This open drain output goes low when  $V_{OUT} < V_{IN} - 1V$ , current limit or the die temperature exceeds  $130^{\circ}C$  approximately. The  $\overline{FLG}$  output is capable of sinking a 10mA load to typically 200mV above ground. The  $\overline{FLG}$  pin requires a pull-up resistor; this resistor should be large in value to reduce energy drain. A 100k $\Omega$  pull-up resistor works well for most applications. In the case of an over-current condition,  $\overline{FLG}$  will be asserted only after the flag response delay time,  $t_D$ , has elapsed. This ensures that  $\overline{FLG}$  is asserted only upon valid over-current conditions and that erroneous error reporting is eliminated.

For example, false over-current conditions may occur during hot-plug events when extremely large capacitive loads are connected and causes a high transient inrush current that exceeds the current limit threshold. The  $\overline{FLG}$  response delay time  $t_D$  is typically 12ms.

### Under-Voltage Lockout

Under-voltage lockout (UVLO) prevents the MOSFET switch from turning on until input voltage exceeds approximately 1.7V. If input voltage drops below approximately 1.6V, UVLO turns off the MOSFET switch,  $\overline{FLG}$  will be asserted accordingly. Under-voltage detection functions only when the switch is enabled.

### Current Limiting and Short-Circuit Protection

The current limit circuitry prevents damage to the MOSFET switch and the hub downstream port but can deliver load current up to the current limit threshold of typically 2.5A through the switch of UM9711/UM9711A. When a heavy load or short circuit is applied to an enabled switch, a large transient current may flow until the current limit circuitry responds. Once this current limit threshold is exceeded the device enters constant current mode until the thermal shutdown occurs or the fault is removed.

### Thermal Shutdown

Thermal shutdown is employed to protect the device from damage if the die temperature exceeds approximately  $130^{\circ}C$ . The power switch will auto-recover when the IC is cooling down. The thermal hysteresis temperature is about  $20^{\circ}C$ .


### Supply Filter/Bypass Capacitor

A 1 $\mu$ F low-ESR ceramic capacitor from  $V_{IN}$  to GND, located at the device is strongly recommended to prevent the input voltage drooping during hot-plug events. However, higher capacitor values will further reduce the voltage droop on the input. Furthermore, without the bypass capacitor, an output short may cause sufficient ringing on the input (from source lead inductance) to destroy the internal control circuitry. The input transient must not exceed 6.5V of the absolute maximum supply voltage even for a short duration.


Package Information

UM9711S SOT23-5

Outline Drawing



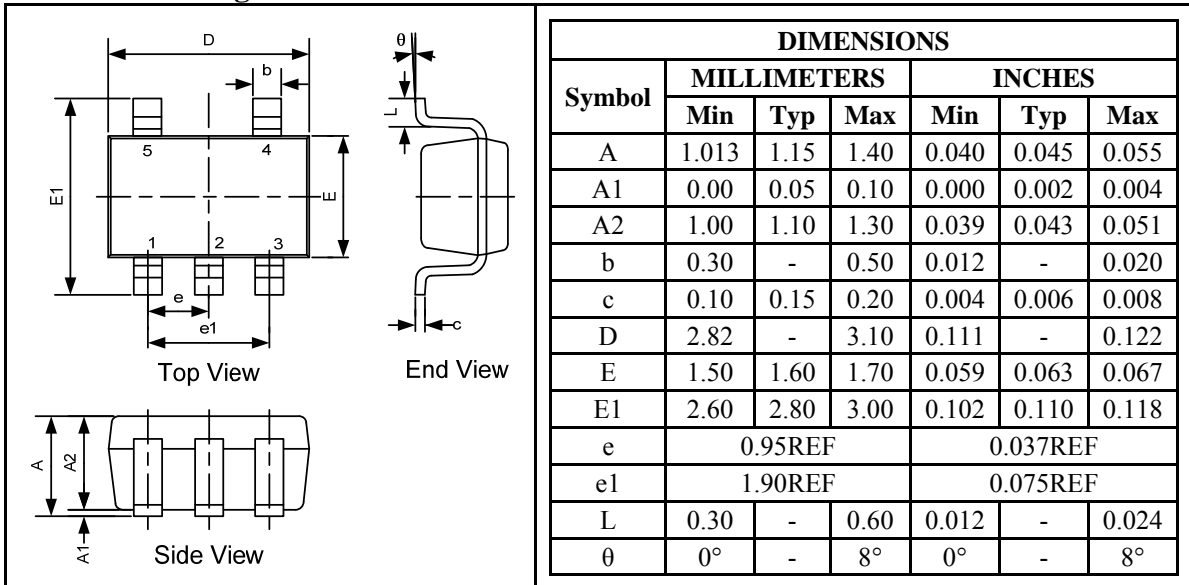


Land Pattern

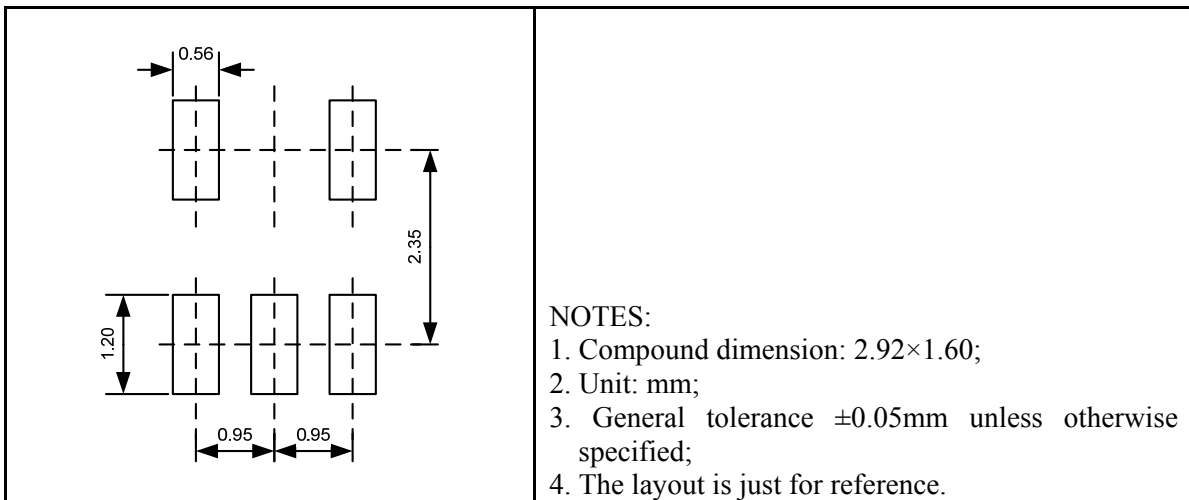

Tape and Reel Orientation

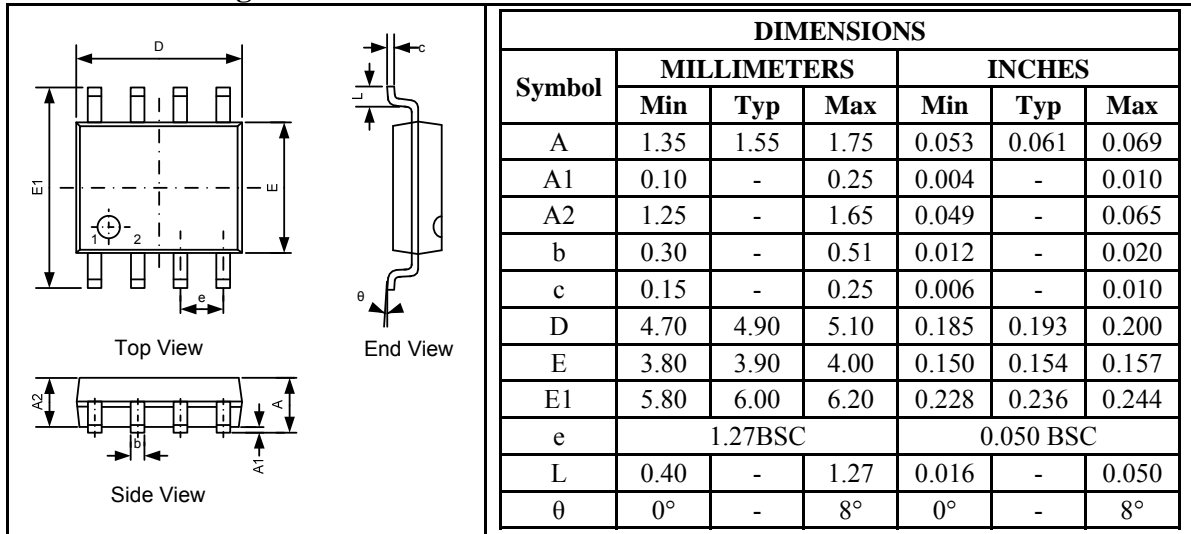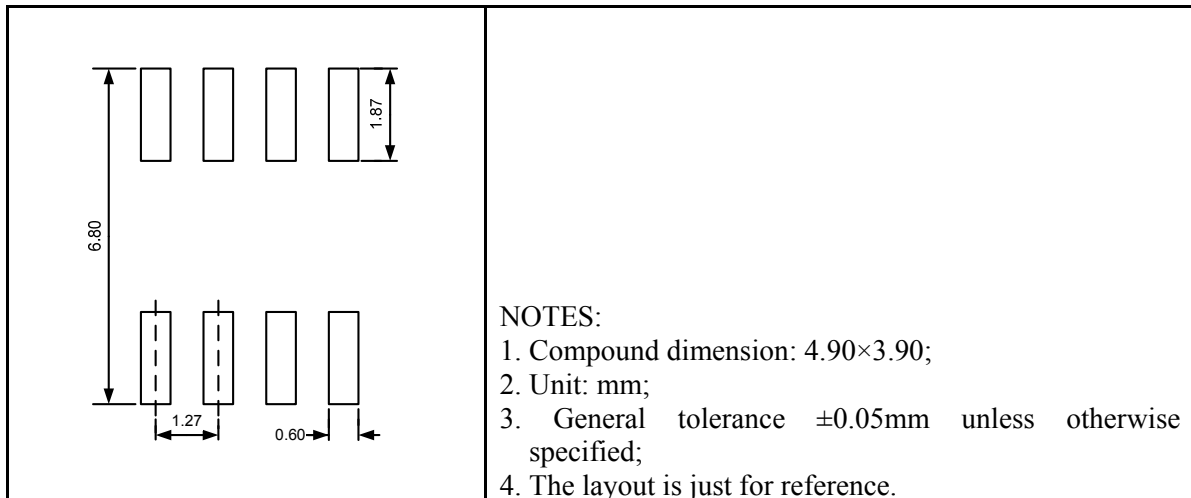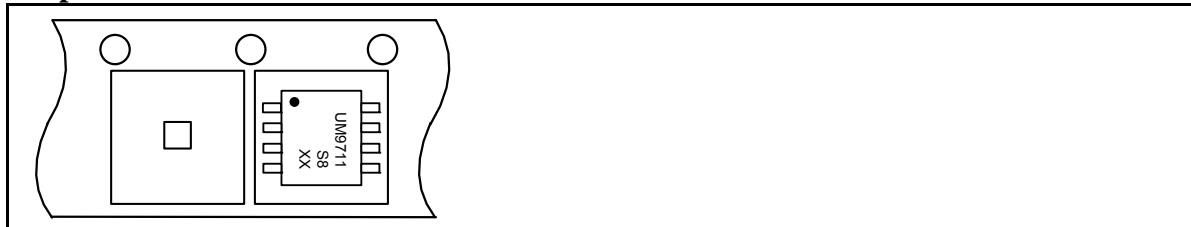


**UM9711S8 SOP8**
**Outline Drawing**

**Land Pattern**

**Tape and Reel Orientation**


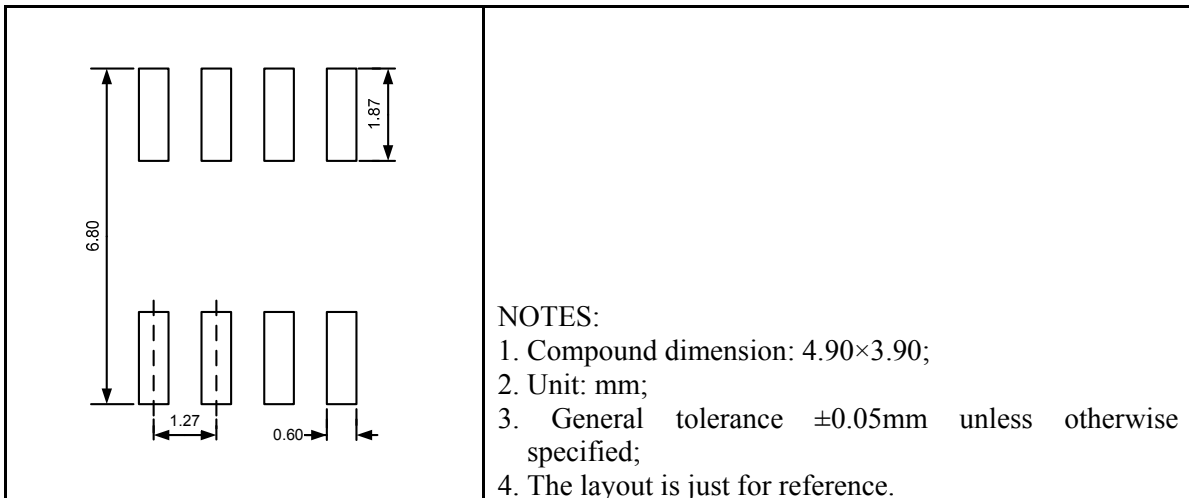


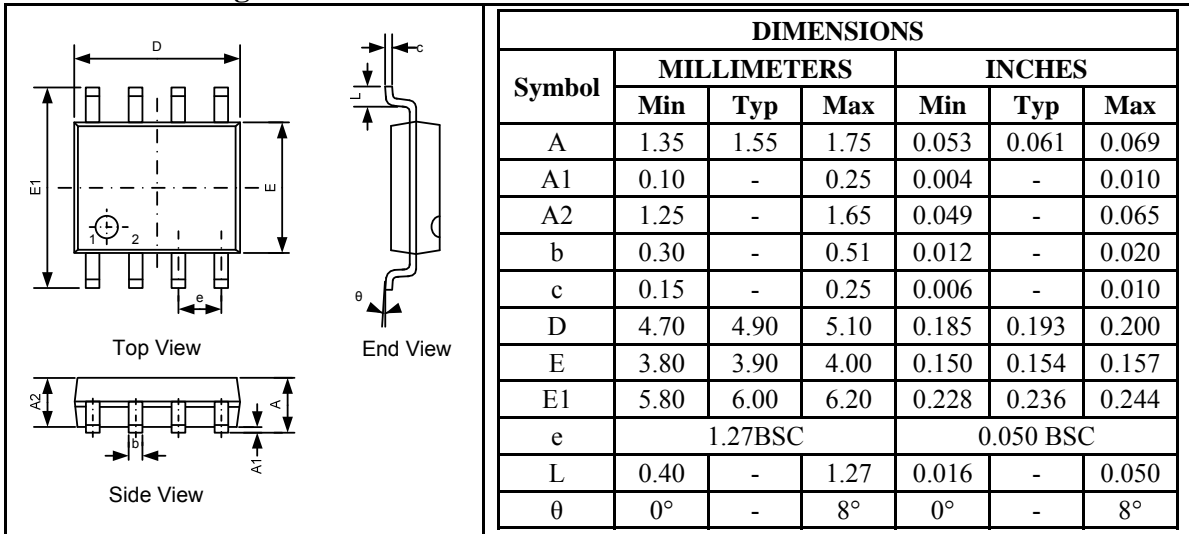UM9711AS8 SOP8


Outline Drawing



Land Pattern



Tape and Reel Orientation

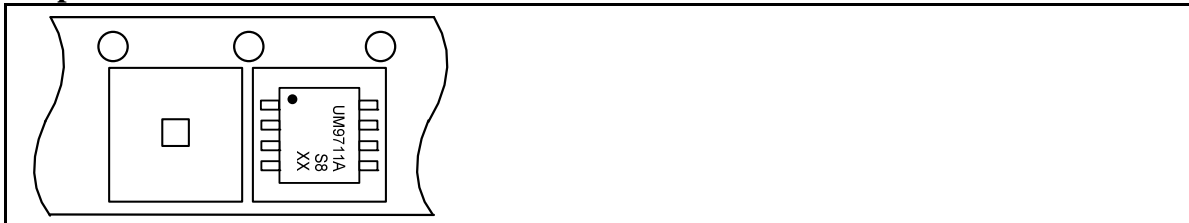

---

## GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

[http://www.union-ic.com/index.aspx?cat\\_code=RoHSDeclaration](http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration)

## IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.



Union Semiconductor, Inc

Add: Unit 606, No.570 Shengxia Road, Shanghai 201210

Tel: 021-51093966

Fax: 021-51026018

Website: [www.union-ic.com](http://www.union-ic.com)