

◆ FEATURE

- (1) 240*64 DOTS
- (2) 1/64 DUTY CYCLE.
- (3) C.O.B ASSEMBLY.

液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

◆ PIN TABLE


PIN NO.	SYMBOL
1	VEE
2	VO
3	VSS
4	VDD
5	/WR
6	/RD
7	/CE
8	C/D
9	/HALT
10	/RESET
11	D0
12	D1
13	D2
14	D3
15	D4
16	D5
17	D6
18	D7
19	NC
20	NC
A	A
K	K

◆ ELECTRICAL CHARACTERISTICS

VSS=0V, AT 25°C

ITEMS	SYMBOL	MIN.	TYP.	MAX.	UNIT
SUPPLY VOLTAGE (LOGIC)	VDD-VSS	4.5	5.0	5.5	V
SUPPLY VOLTAGE (LCD)	VDD-VO	13.1	13.7	14.9	V
INPUT HIGH LEVEL VOLTAGE	VIH	VDD-2.2	-	VDD	V
INPUT LOW LEVEL VOLTAGE	VIL	0	-	0.8	V
OUTPUT HIGH LEVEL VOLTAGE	VOH	VDD-0.3	-	VDD	V
OUTPUT LOW LEVEL VOLTAGE	VOL	0	-	0.3	V
POWER SUPPLY CURRENT	IDD	-	-	14.0	mA
LCD POWER SUPPLY CURRENT	IEE	-	-	3.6	mA

◆ BLOCK DIAGRAM

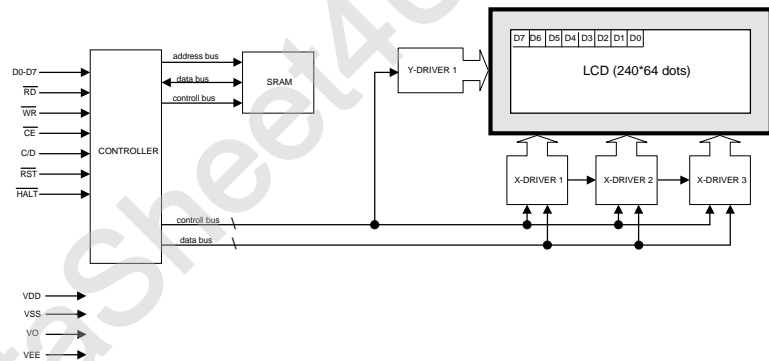

◆ OUTLINE DIMENSION

