

# UNIPAC OPTOELECTRONICS CORPORATION

Spec. No. 233-220-075

Version : 0




Total pages: 19

Date : 1999/07/22

## UP040D01 COLOR TFT-LCD PRELIMINARY SPECIFICATION

MODEL NAME: UP040D01

The content of this technical information is subject to change without notice. Please contact Unipac or its agent for further information.

| Approved by   | Checked by  | Prepared by  |
|---|---|--|
|  |  |  |

Unipac copyright 1999  
All rights reserved,  
copying forbidden.

**Contents:**

|   |            |
|---|------------|
| <b>A. Physical specifications</b> .....   | <b>P3</b>  |
| <b>B. Electrical specifications</b> ..... | <b>P4</b>  |
| 1. Pin assignment .....                   | <b>P4</b>  |
| a. TFT-LCD panel driving section .....    | <b>P4</b>  |
| b. Backlight driving section .....        | <b>P5</b>  |
| 2. Absolute maximum ratings .....         | <b>P5</b>  |
| 3. Electrical characteristics .....       | <b>P6</b>  |
| a. Typical operating conditions .....     | <b>P6</b>  |
| b. Current consumption .....              | <b>P6</b>  |
| c. Backlight driving conditions .....     | <b>P6</b>  |
| 4. AC Timing .....                        | <b>P7</b>  |
| a. Timing conditions .....                | <b>P7</b>  |
| b. Timing diagram .....                   | <b>P7</b>  |
| <b>C. Optical specifications</b> .....    | <b>P8</b>  |
| <b>D. Reliability test items</b> .....    | <b>P10</b> |
| <b>E. Packing form</b> .....              | <b>P11</b> |

**Appendix:**

|   |            |
|---|------------|
| Fig.1 Outline dimension of TFT-LCD module .....   | <b>P12</b> |
| Fig.2 Sampling clock timing .....                 | <b>P13</b> |
| Fig.3 Horizontal display timing range .....       | <b>P14</b> |
| Fig.4-(a) Horizontal timing .....                 | <b>P15</b> |
| Fig.4-(b) Detail horizontal timing .....          | <b>P16</b> |
| Fig.5 Vertical shift clock timing .....           | <b>P17</b> |
| Fig.6-(a) Vertical timing (From up to down) ..... | <b>P18</b> |
| Fig.6-(b) Vertical timing (From down to up) ..... | <b>P19</b> |

### A.Physical specifications

| NO. | Item                    | Specification              | Remark |
|-----|-------------------------|----------------------------|--------|
| 1   | Display resolution(dot) | 480(W) × 234(H)            |        |
| 2   | Active area(mm)         | 82.1(W) × 61.8(H)          |        |
| 3   | Screen size(inch)       | 4.05(Diagonal)             |        |
| 4   | Dot pitch(mm)           | 0.171(W) × 0.264(H)        |        |
| 5   | Color configuration     | R.G.B delta                |        |
| 6   | Overall dimension(mm)   | 96.0(W) × 76.0(H) × 6.5(D) | Note 1 |
| 7   | Weight(g)               | (65±20)                    |        |

Note 1 : Refer to Fig. 1

## B.Electrical specifications

### 1.Pin assignment

#### a. TFT-LCD panel driving section

| Pin no. | Symbol           | i/o | Description  | Remark   |
|---------|------------------|-----|--|----------|
| 1       | GND              | -   | Ground for logic circuit                                 |          |
| 2       | V <sub>CC</sub>  | i   | Supply voltage for logic control circuit for scan driver |          |
| 3       | V <sub>GL</sub>  | i   | Negative power for scan driver                           |          |
| 4       | V <sub>GH</sub>  | i   | Positive power for scan driver                           |          |
| 5       | STVR             | i/o | Vertical start pulse                                     | Note 1   |
| 6       | STVL             | i/o | Vertical start pulse                                     | Note 1   |
| 7       | CKV              | i   | Shift clock input for scan driver                        |          |
| 8       | U/D              | i   | UP/DOWN scan control input                               | Note 1,2 |
| 9       | OEV              | i   | Output enable input for scan driver                      |          |
| 10      | VCOM             | i   | Common electrode driving signal                          |          |
| 11      | VCOM             | i   | Common electrode driving signal                          |          |
| 12      | L/R              | i   | LEFT/RIGHT scan control input                            | Note 1,2 |
| 13      | Q1H              | i   | Analog signal rotate input                               |          |
| 14      | OEH              | i   | Output enable input for data driver                      |          |
| 15      | STHL             | i/o | Start pulse for horizontal scan line                     | Note 1   |
| 16      | STHR             | i/o | Start pulse for horizontal scan line                     | Note 1   |
| 17      | CPH3             | i   | Sampling and shifting clock pulse for data driver        |          |
| 18      | CPH2             | i   | Sampling and shifting clock pulse for data driver        |          |
| 19      | CPH1             | i   | Sampling and shifting clock pulse for data driver        |          |
| 20      | V <sub>CC</sub>  | i   | Supply voltage of logic control circuit for data driver  |          |
| 21      | GND              | -   | Ground for logic circuit                                 |          |
| 22      | VR               | i   | Alternated video signal input(Red)                       |          |
| 23      | VG               | i   | Alternated video signal input(Green)                     |          |
| 24      | VB               | i   | Alternated video signal input(Blue)                      |          |
| 25      | AV <sub>DD</sub> | i   | Supply voltage for analog circuit                        |          |
| 26      | AV <sub>SS</sub> | -   | Ground for analog circuit                                |          |


Note 1 : Selection of scanning mode

| Setting of scan control input |                 | IN/OUT state for start pulse |      |      |      | Scanning direction                       |
|-------------------------------|-----------------|------------------------------|------|------|------|--|
| U/D                           | L/R             | STVR                         | STVL | STHR | STHL |  |
| GND                           | V <sub>CC</sub> | OUT                          | IN   | OUT  | IN   | From up to down, and from left to right. |
| V <sub>CC</sub>               | GND             | IN                           | OUT  | IN   | OUT  | From down to up, and from right to left. |
| GND                           | GND             | OUT                          | IN   | IN   | OUT  | From up to down, and from right to left. |
| V <sub>CC</sub>               | V <sub>CC</sub> | IN                           | OUT  | OUT  | IN   | From down to up, and from left to right. |

IN: Input; OUT: Output.

Note 2 : Definition of scanning direction.

Refer to figure as below:

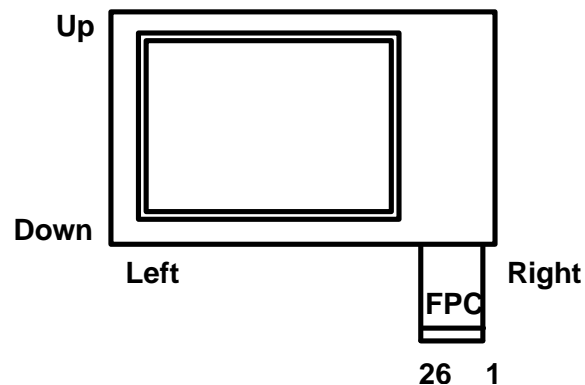

b. Backlight driving section( Refer to Fig.1)

| No. | Symbol | I/O | Description                                      | Remark |
|-----|--------|-----|--|--------|
| 1   | HI     | i   | Power supply for backlight unit ( High voltage ) |        |
| 2   | GND    | -   | Ground   |        |

## 2. Absolute maximum ratings

| Item                  | Symbol                            | Condition           | Min. | Max.                  | Unit | Remark              |
|-----------------------|-----------------------------------|---------------------|------|-----------------------|------|---------------------|
| Power voltage         | V <sub>CC</sub>                   | GND=0               | -0.3 | 7                     | V    |                     |
|                       | AV <sub>DD</sub>                  | AV <sub>SS</sub> =0 | -0.3 | 7                     | V    |                     |
|                       | V <sub>GH</sub>                   | GND=0               | -0.3 | 18                    | V    |                     |
|                       | V <sub>GL</sub>                   |                     | -15  | 0.3                   | V    |                     |
|                       | V <sub>GH</sub> - V <sub>GL</sub> |                     | -    | 31                    | V    |                     |
| Input signal voltage  | V <sub>i</sub>                    |                     | -0.3 | AV <sub>DD</sub> +0.3 | V    | Note 1              |
|                       | V <sub>l</sub>                    |                     | -0.3 | V <sub>CC</sub> +0.3  | V    | Note 2              |
|                       | V <sub>COM</sub>                  |                     | -2.9 | 5.2                   | V    |                     |
| Operating temperature | T <sub>opa</sub>                  |                     | 0    | 60                    | °C   | Ambient temperature |
| Storage temperature   | T <sub>stg</sub>                  |                     | -25  | 80                    | °C   | Ambient temperature |

Note 1: VR, VG, VB

Note 2: STHL, STHR, Q1H, OEH, L/R, CPH1 ~ CPH3, STVR, STVL, OEV, CKV, U/D

3. Electrical characteristics

a. Typical operating conditions (GND=AV<sub>SS</sub>=0V , Note 5)

| Item                                |         | Symbol            | Min.                  | Typ.                | Max.                  | Unit | Remark                                   |
|-------------------------------------|---------|-------------------|-----------------------|---------------------|-----------------------|------|--|
| Power supply                        |         | V <sub>CC</sub>   | 4.8                   | 5                   | 5.2                   | V    |  |
|                                     |         | AV <sub>DD</sub>  | 4.8                   | 5                   | 5.2                   | V    |  |
|                                     |         | V <sub>GH</sub>   | 14.3                  | 15                  | 15.7                  | V    |  |
|                                     |         | V <sub>GLAC</sub> | 3.5                   | 5                   | 7.5                   | Vp-p | AC component of V <sub>GL</sub> , Note 1 |
|                                     |         | V <sub>GLDC</sub> | -10.5                 | -10                 | -9.5                  | V    | DC component of V <sub>GL</sub>          |
| Video signal amplitude (VR, VG, VB) |         | V <sub>iA</sub>   | AV <sub>SS</sub> +0.4 | -                   | AV <sub>DD</sub> -0.8 | V    | Note 2                                   |
|                                     |         | V <sub>iAC</sub>  | -                     | 3                   | -                     | V    | AC component                             |
|                                     |         | V <sub>iDC</sub>  | -                     | AV <sub>DD</sub> /2 | -                     | V    | DC component                             |
| VCOM                                |         | V <sub>CAC</sub>  | 3.5                   | 5                   | 7.5                   | Vp-p | AC component, Note 3                     |
|                                     |         | V <sub>CDC</sub>  | -                     | 1.3                 | -                     | V    | DC component                             |
| Input signal voltage                | H Level | V <sub>IH</sub>   | 4                     | -                   | V <sub>CC</sub>       | V    | Note 4                                   |
|                                     | L Level | V <sub>IL</sub>   | 0                     | -                   | 1                     | V    |  |

Note 1: The same phase and amplitude with common electrode driving signal(VCOM).

Note 2: Refer to Fig.4-(a)

Note 3: The brightness of LCD panel could be changed by adjusting the AC component of VCOM.

Note 4: STHL, STHR, Q1H, OEH, L/R, CPH1 ~ CPH3, STVR, STVL, OEV, U/D, CKV .

Note 5: Be sure to apply GND , V<sub>CC</sub> , V<sub>GL</sub> to the LCD first , and then apply V<sub>GH</sub> .

b. Current consumption (GND=AV<sub>SS</sub>=0V)

| Parameter          | Symbol          | Condition              | Min. | Typ. | Max. | Unit | Remark |
|--------------------|-----------------|------------------------|------|------|------|------|--------|
| Current for driver | I <sub>GH</sub> | V <sub>GH</sub> =15V   | -    | 80   | 150  | μA   |        |
|                    | I <sub>GL</sub> | V <sub>GL</sub> = -10V | -    | -0.2 | -0.4 | mA   |        |
|                    | I <sub>CC</sub> | V <sub>CC</sub> =5V    | -    | 2.0  | 4.0  | mA   |        |
|                    | I <sub>DD</sub> | AV <sub>DD</sub> =5V   | -    | 5    | 10   | mA   |        |

c. Backlight driving conditions

| Parameter             | Symbol         | Min. | Typ. | Max. | Unit  | Remark |
|-----------------------|----------------|------|------|------|-------|--------|
| Lamp voltage          | V <sub>L</sub> | 260  | 290  | 320  | Vrms  |        |
| Lamp current          | I <sub>L</sub> | 2.5  | 2.9  | 3.3  | mArms |        |
| Frequency             | F <sub>L</sub> | 55   | 60   | 65   | KHz   |        |
| Lamp Starting voltage | V <sub>s</sub> | -    | -    | 580  | Vrms  | Note 1 |
|                       |                | -    | -    | 870  | Vrms  | Note 2 |

Note 1: Ta = 25 °C

Note 2: Ta = 0 °C

#### 4.AC Timing

##### a.Timing conditions

| Parameter                       | Symbol                              | Min. | Typ.        | Max.        | Unit.       | Remark     |
|---------------------------------|-------------------------------------|------|-------------|-------------|-------------|------------|
| Rising time                     | $t_r$                               | -    | -           | 10          | ns          | Note 1     |
| Falling time                    | $t_f$                               | -    | -           | 10          | ns          | Note 1     |
| High and low level pulse width  | $t_{CPH}$                           | 299  | 308         | 319         | ns          | CPH1~CPH3  |
| CPH pulse duty                  | $t_{CWH}$                           | 40   | 50          | 60          | %           | CPH1~CPH3  |
| CPH pulse delay                 | $t_{C12}$<br>$t_{C23}$<br>$t_{C31}$ | 70   | $t_{CPH}/3$ | $t_{CPH}/2$ | ns          | CPH1; CPH3 |
| STH setup time                  | $t_{SUH}$                           | 35   | -           | -           | ns          | STHR,STHL  |
| STH hold time                   | $t_{HDH}$                           | 35   | -           | -           | ns          | STHR,STHL  |
| STH pulse width                 | $t_{STH}$                           | -    | 1           | -           | $t_{CPH}$   | STHR,STHL  |
| STH period                      | $t_H$                               | 61.5 | 63.5        | 65.5        | $\mu S$     | STHR,STHL  |
| OEH pulse width                 | $t_{OEH}$                           | -    | 3           | -           | $t_{CPH}$   | OEH        |
| Sample and hold disable time    | $t_{DIS1}$                          | -    | 28          | -           | $t_{CPH}$   |            |
| OEV pulse width                 | $t_{OEV}$                           | -    | 12          | -           | $t_{CPH}$   | OEV        |
| CKV pulse width                 | $t_{CKV}$                           | 16   | 28          | 40          | $t_{CPH}$   | CKV        |
| Clean enable time               | $t_{DIS2}$                          | -    | 10          | -           | $t_{CPH}$   |            |
| Horizontal display start        | $t_{SH}$                            | -    | 0           | -           | $t_{CPH}/3$ |            |
| Horizontal display timing range | $t_{DH}$                            | -    | 480         | -           | $t_{CPH}/3$ |            |
| STV setup time                  | $t_{SUV}$                           | 400  | -           | -           | ns          | STVL,STVR  |
| STV hold time                   | $t_{HDV}$                           | 400  | -           | -           | ns          | STVL,STVR  |
| STV pulse width                 | $t_{STV}$                           | -    | -           | 1           | $t_H$       | STVL,STVR  |
| Horizontal lines per field      | $t_V$                               | 256  | 262         | 268         | $t_H$       | Note 2     |
| Vertical display start          | $t_{SV}$                            | -    | 3           | -           | $t_H$       |            |
| Vertical display timing range   | $t_{DV}$                            | -    | 234         | -           | $t_H$       |            |
| VCOM rising time                | $t_{rCOM}$                          | -    | -           | 3           | $\mu S$     |            |
| VCOM falling time               | $t_{fCOM}$                          | -    | -           | 3           | $\mu S$     |            |
| VCOM delay time                 | $t_{DCOM}$                          | -    | -           | 3           | $\mu S$     |            |
| RGB delay time                  | $t_{DRGB}$                          | -    | -           | 1           | $\mu S$     |            |

Note 1: For all of the logic signals.

Note 2: Please don't use odd horizontal lines to drive LCD panel for both odd and even field simultaneously.

##### b.Timing diagram


Please refer to the attached drawing, from Fig.2 to Fig.6.



**C.Optical specifications ( Note 1,Note 2, Note 3 )**

| Item               | Symbol | Condition                  | Min. | Typ. | Max. | Unit | Remark   |
|--------------------|--------|----------------------------|------|------|------|------|----------|
| Response time      | Rise   | $\theta = 0^\circ$         | -    | 25   | 50   | ms   | Note 4,6 |
|                    | Fall   |                            | -    | 30   | 60   | ms   |          |
| Contrast ratio     | CR     | At optimized viewing angle | 60   | 150  |      |      | Note 5,6 |
| Viewing angle      | Top    | $CR \geq 10$               | 10   | -    | -    | deg. | Note 6,7 |
|                    | Bottom |                            | 30   | -    | -    |      |          |
|                    | Left   |                            | 45   | -    | -    |      |          |
|                    | Right  |                            | 45   | -    | -    |      |          |
| Brightness         | $Y_L$  | $\theta = 0^\circ$         | 210  | 250  | -    | nit  | Note 8   |
| White chromaticity | x      | $\theta = 0^\circ$         | 0.25 | 0.30 | 0.35 |      | Note 8   |
|                    | y      |                            | 0.30 | 0.35 | 0.40 |      |          |

- Note 1. Ambient temperature = 25 °C, and lamp current  $I_L=2.9mA$ rms.  
 Note 2. To be measured in the dark room.  
 Note 3. To be measured on the center area of panel with a viewing cone of 1° by Topcon luminance meter BM-7, after 10 minutes operation.  
 Note 4. Definition of response time:  
 The output signals of photodetector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time),respectively.  
 The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

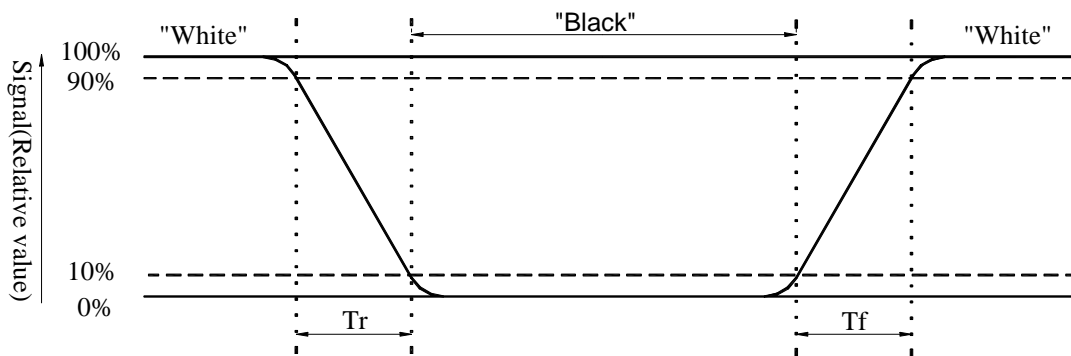

- Note 5. Definition of contrast ratio:  
 Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photodetector output when LCD is at "White" state}}{\text{Photodetector output when LCD is at "Black" state}}$$

Note 6. White  $V_i = V_{i50} \mp 1.5V$

Black  $V_i = V_{i50} \pm 2.0V$

'  $\pm$  ' means that analog input signal swings in phase with COM signal.


'  $\mp$  ' means that analog input signal swings out of phase with COM signal.

$V_{i50}$  : The analog input voltage when transmission is 50%.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 7. Definition of viewing angle:

Refer to figure as below.

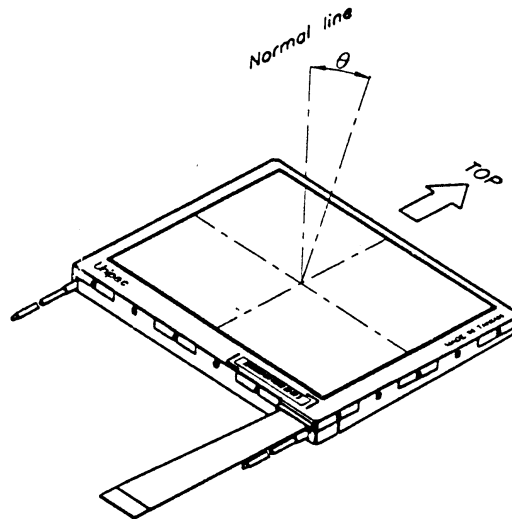


Note 8. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

**D.Reliability test items:**

| No. | Test items                         | Conditions   | Remark                        |
|-----|------------------------------------|--|-------------------------------|
| 1   | High temperature storage           | Ta = 80°C 240H   |                               |
| 2   | Low temperature storage            | Ta = -25°C 240H  |                               |
| 3   | High temperature operation         | Ta = 60°C 240H   |                               |
| 4   | Low temperature operation          | Ta = 0°C 240H  |                               |
| 5   | High temperature and high humidity | Ta = 60°C · 95%RH 240H   | Operation                     |
| 6   | Heat shock                         | -25°C ~ +80°C/50 cycles 2H/cycle   | Non-operation                 |
| 7   | Electrostatic discharge            | ± 200V, 200pF(0Ω),once for each terminal   | Non-operation                 |
| 8   | Vibration                          | Frequency range:10 ~ 55Hz<br>Stroke :1.5mm<br>Sweep :10j 55Hz ~ 10Hz<br>2 hours for each direction of X,Y,Z<br>(6 hours for total) | JIS C7021,A-10<br>condition A |
| 9   | Mechanical shock                   | 100G · 6ms, ±X, ±Y, ± Z<br>3 times for each direction  | JIS C7021,A-7<br>condition C  |
| 10  | Vibration (with carton)            | Random vibration:<br>0.015G <sup>2</sup> /Hz from 5 ~ 200Hz<br>-6dB/Octave from 200 ~ 500Hz  | IEC 68-34                     |
| 11  | Drop ( with carton )               | Height: 80cm<br>1 corner,3 edges,6 surfaces  |                               |

Note: Ta: Ambient temperature.


### E. Packing form

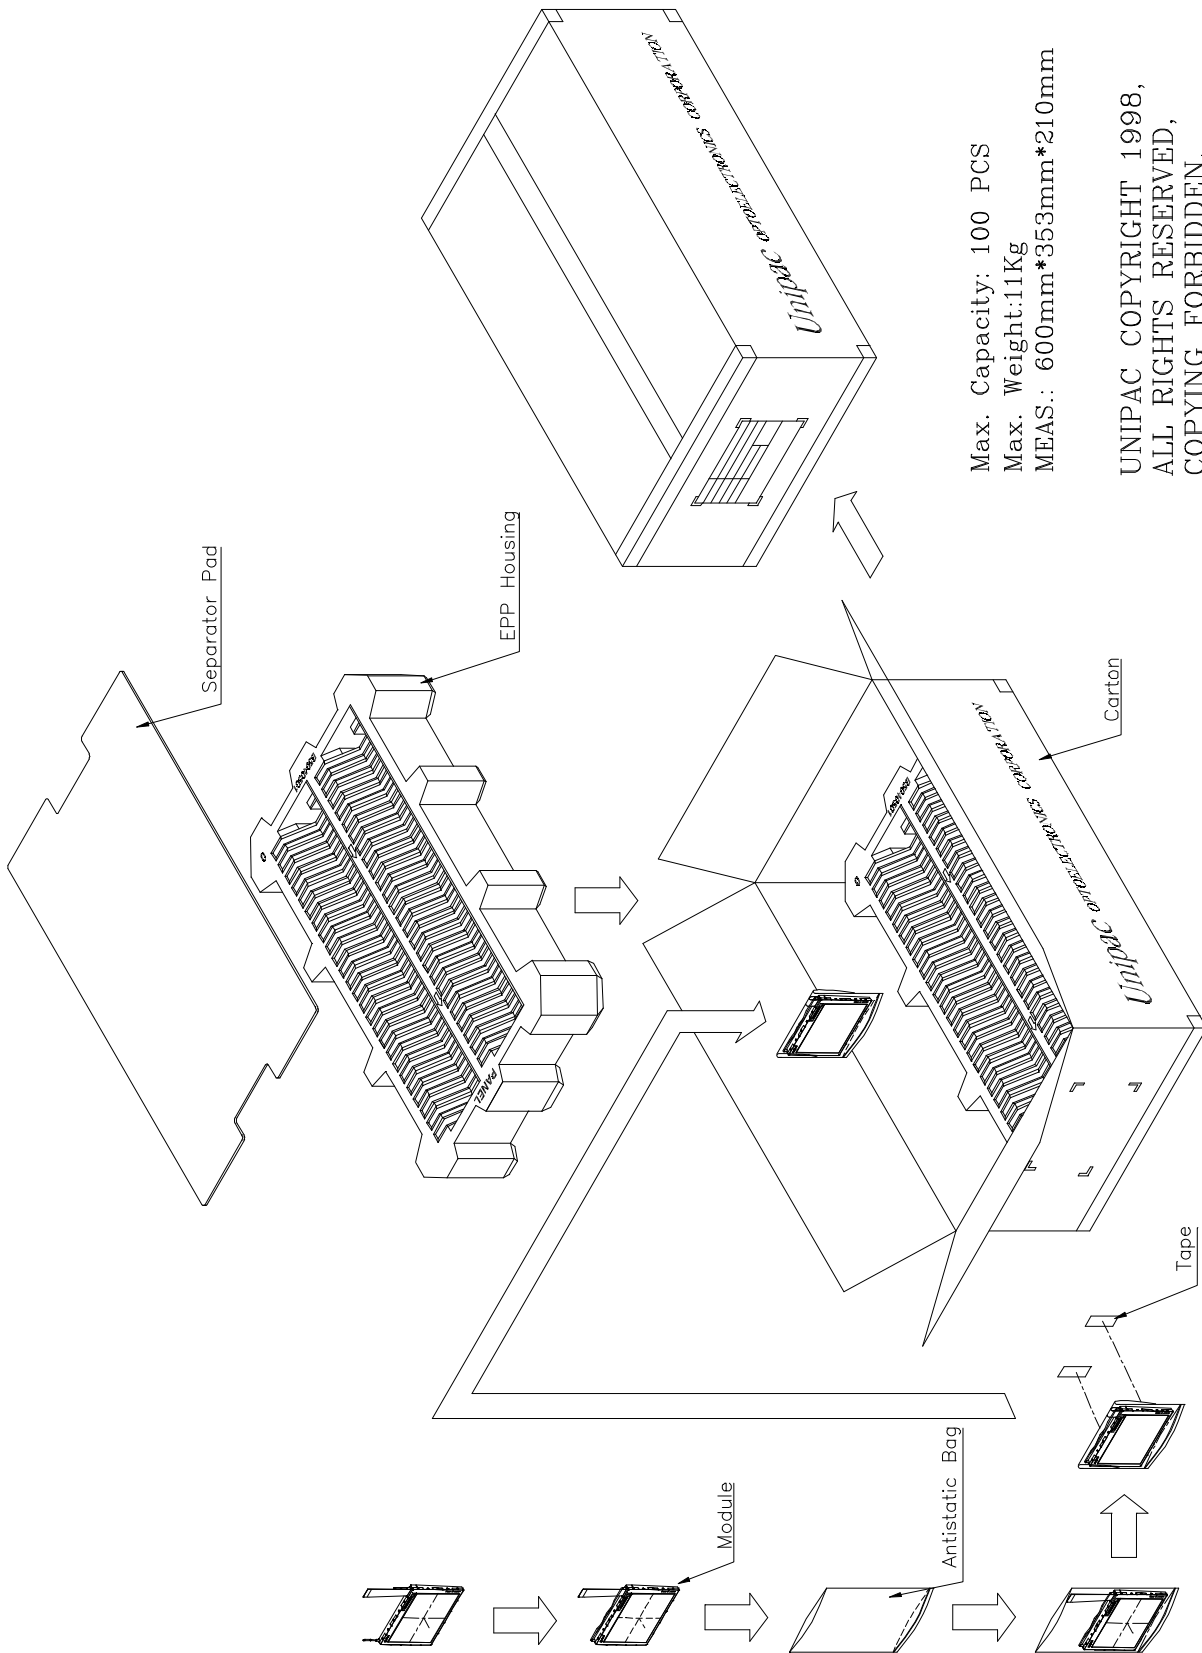



Max. Capacity: 100 PCS  
Max. Weight: 11Kg  
MEAS.: 600mm\*353mm\*210mm

UNIPAC COPYRIGHT 1998,  
ALL RIGHTS RESERVED,  
COPYING FORBIDDEN.

- NOTES :
1. General tolerance  $\pm 0.3$ .
  2. The bending radius of FPC should be larger than 0.6.
  3. Unit : mm



UNIPAC COPYRIGHT 1999,  
 ALL RIGHTS RESERVED,  
 COPYING FORBIDDEN.

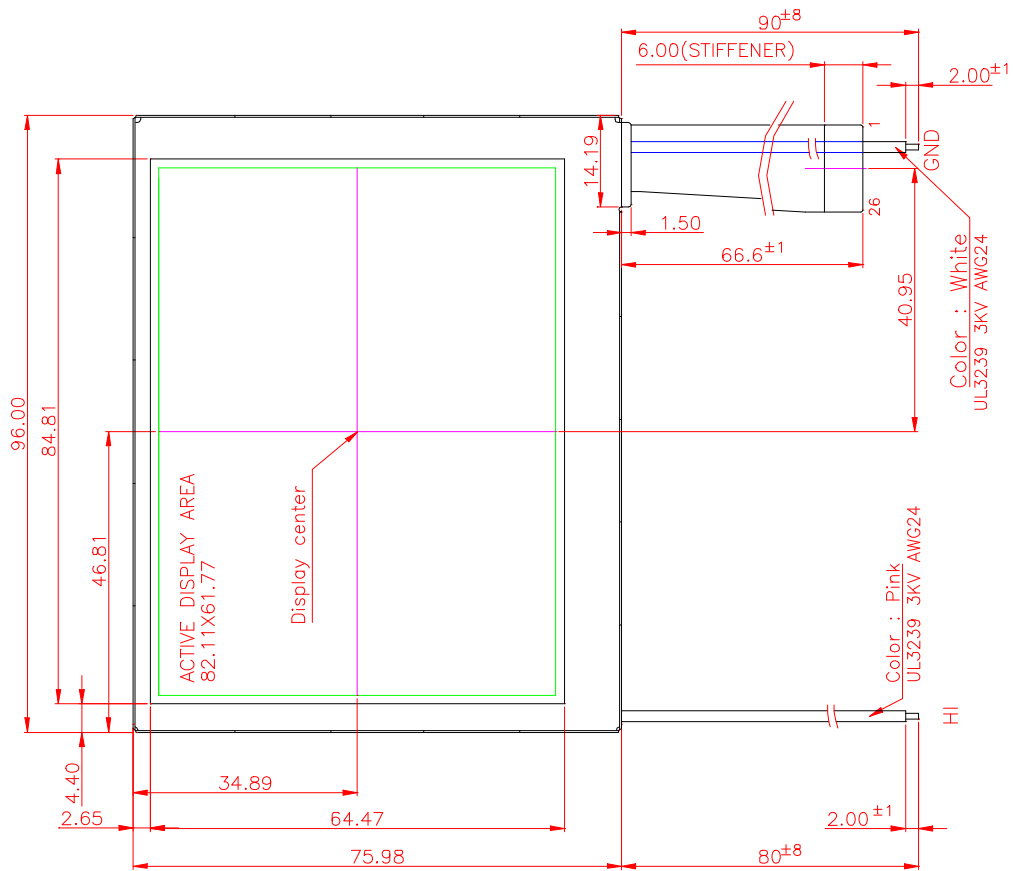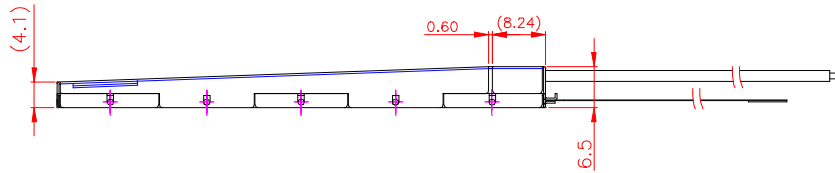

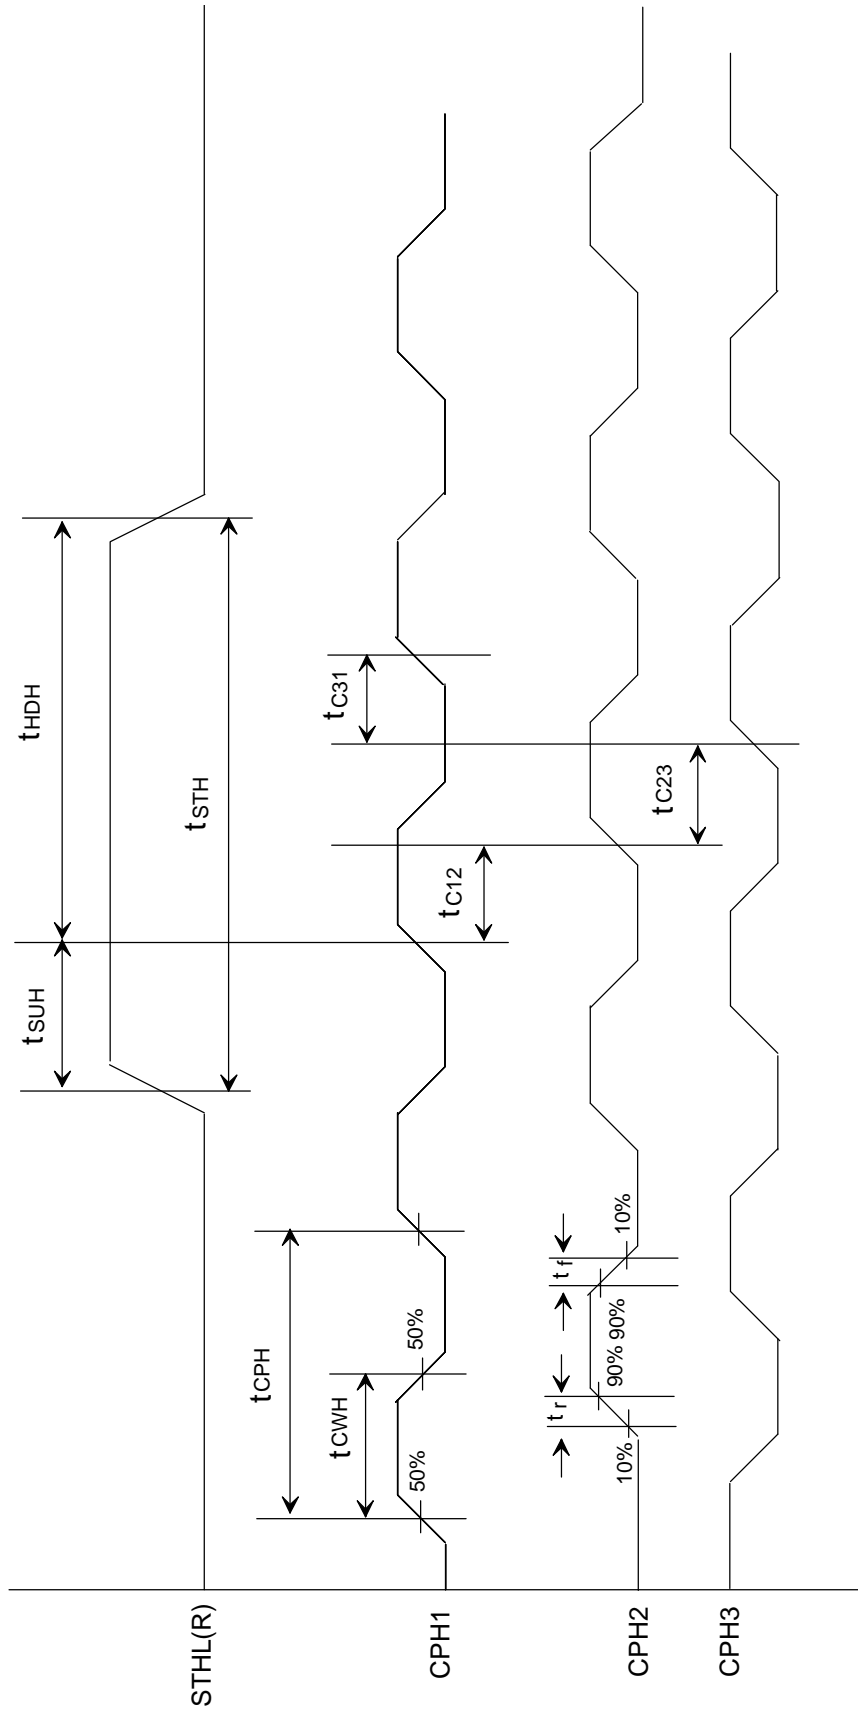


Fig.2 Sampling clock timing

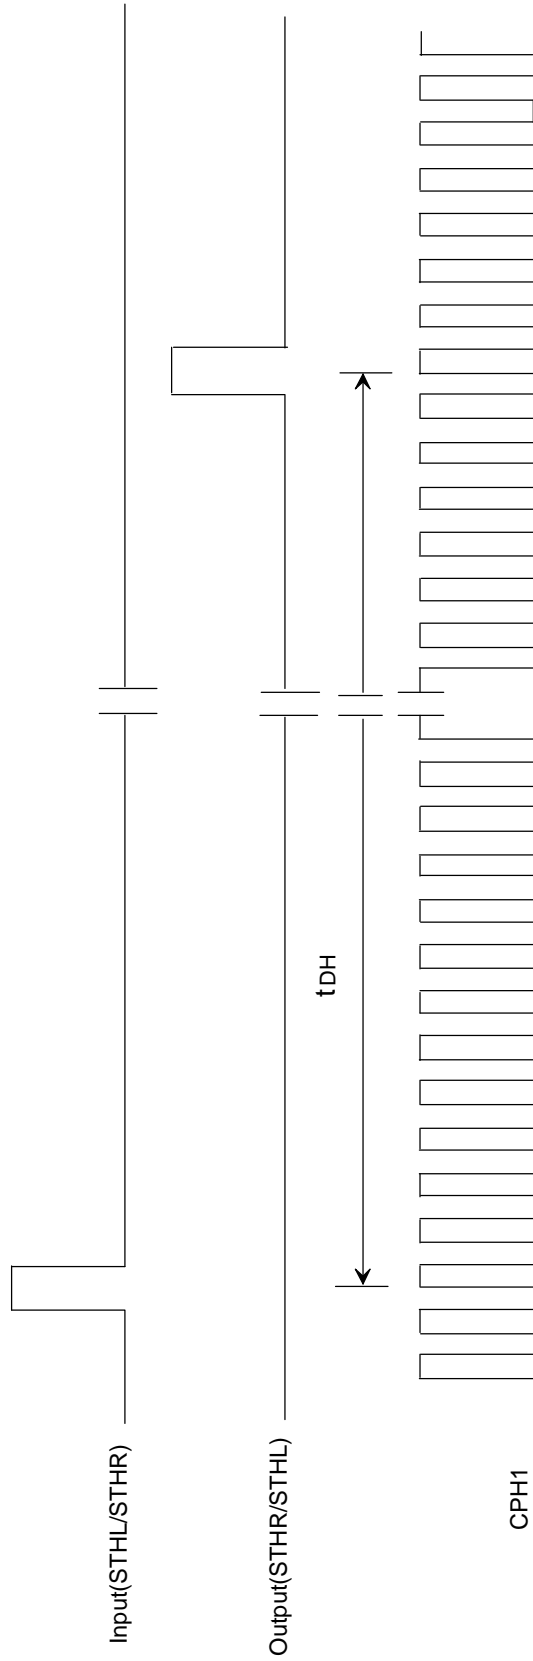


Fig.3 Horizontal display timing range


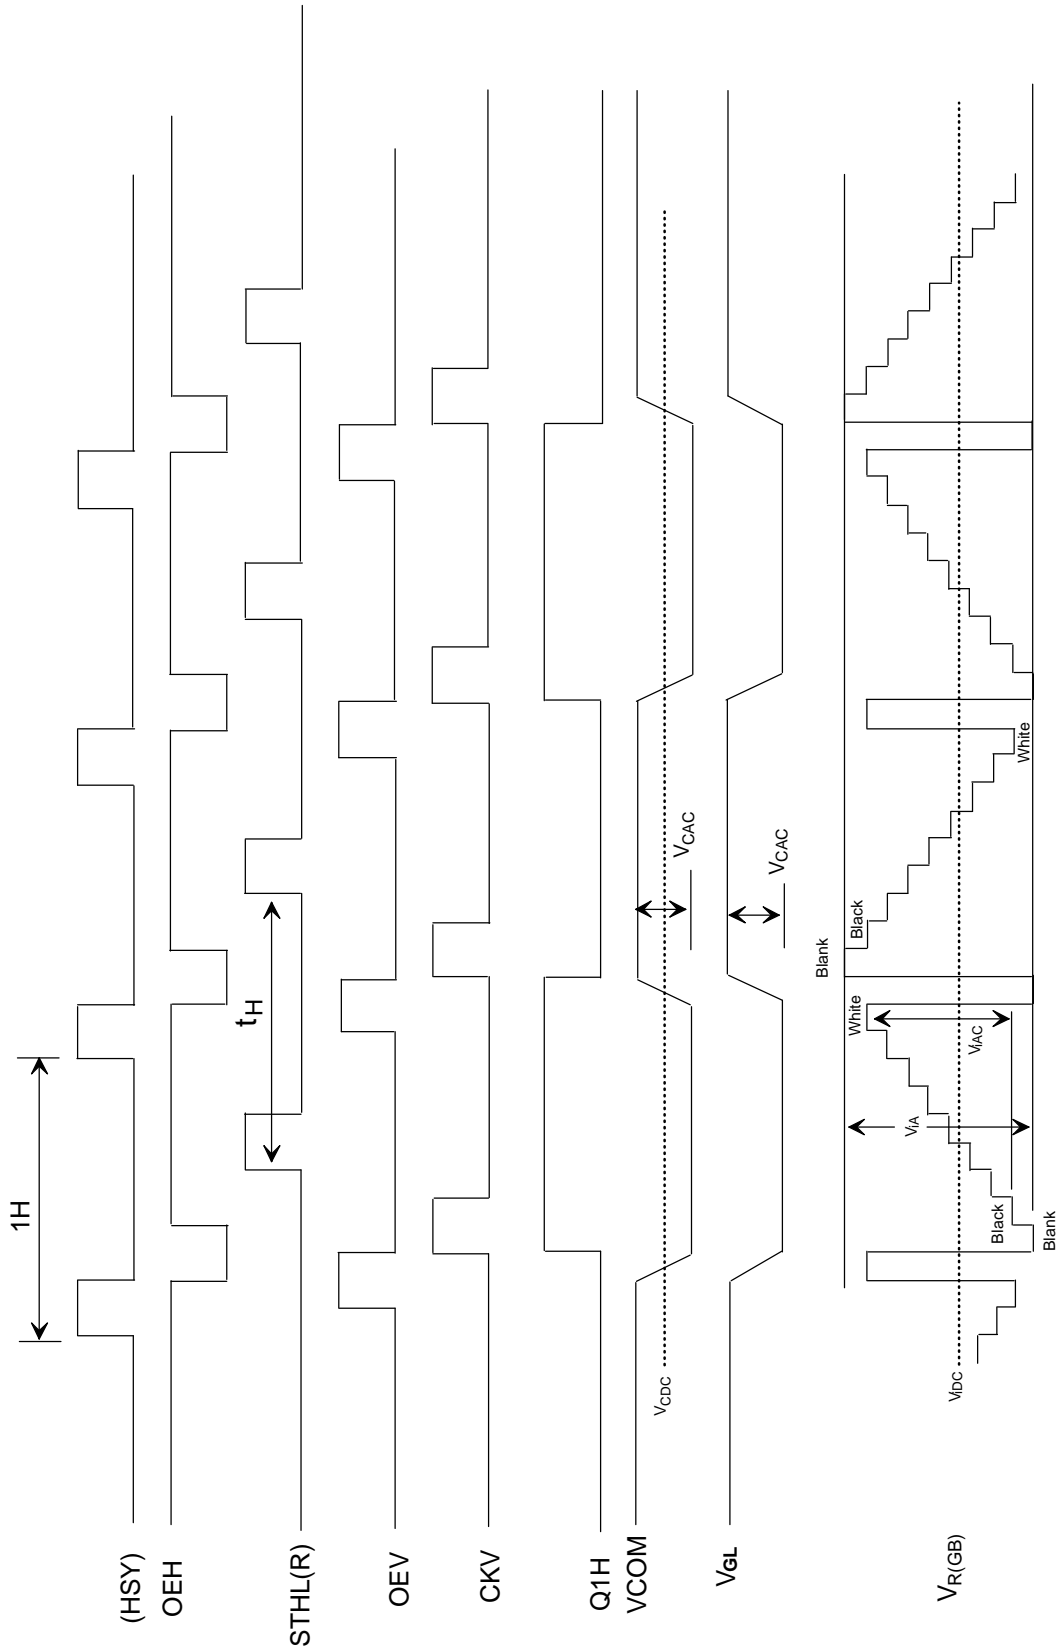


Fig.4-(a) Horizontal timing



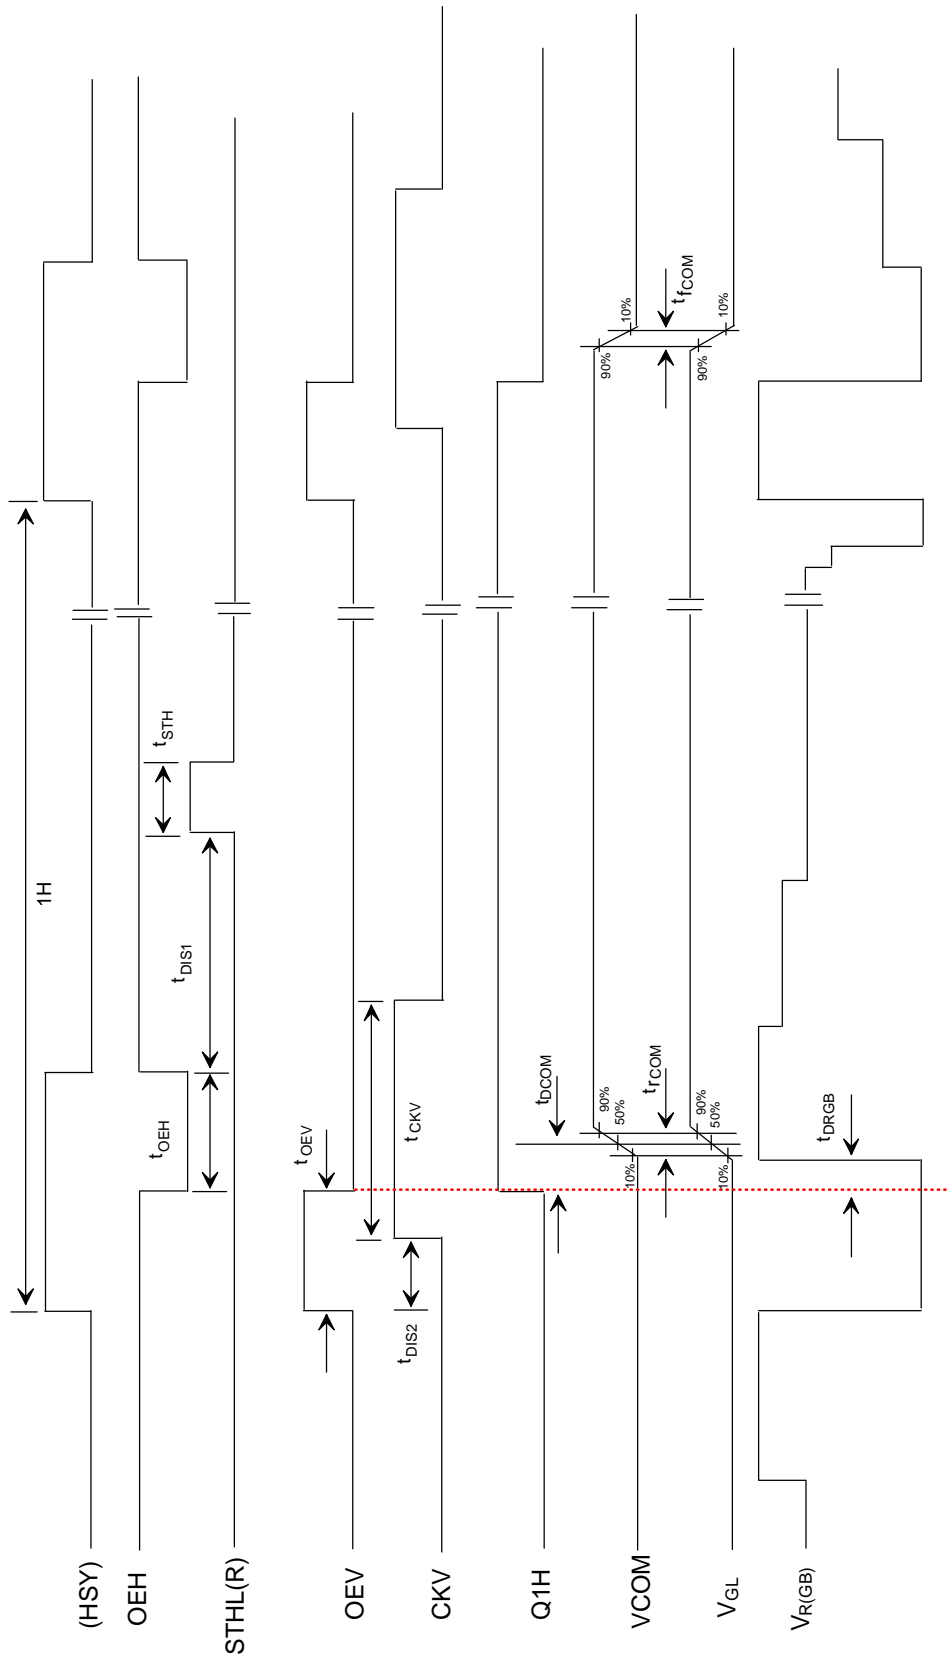

Note: The rising edge of Q1H and the falling edge of OEV should be synchronized with the falling edge of OEH

Fig.4-(b) Detail horizontal timing

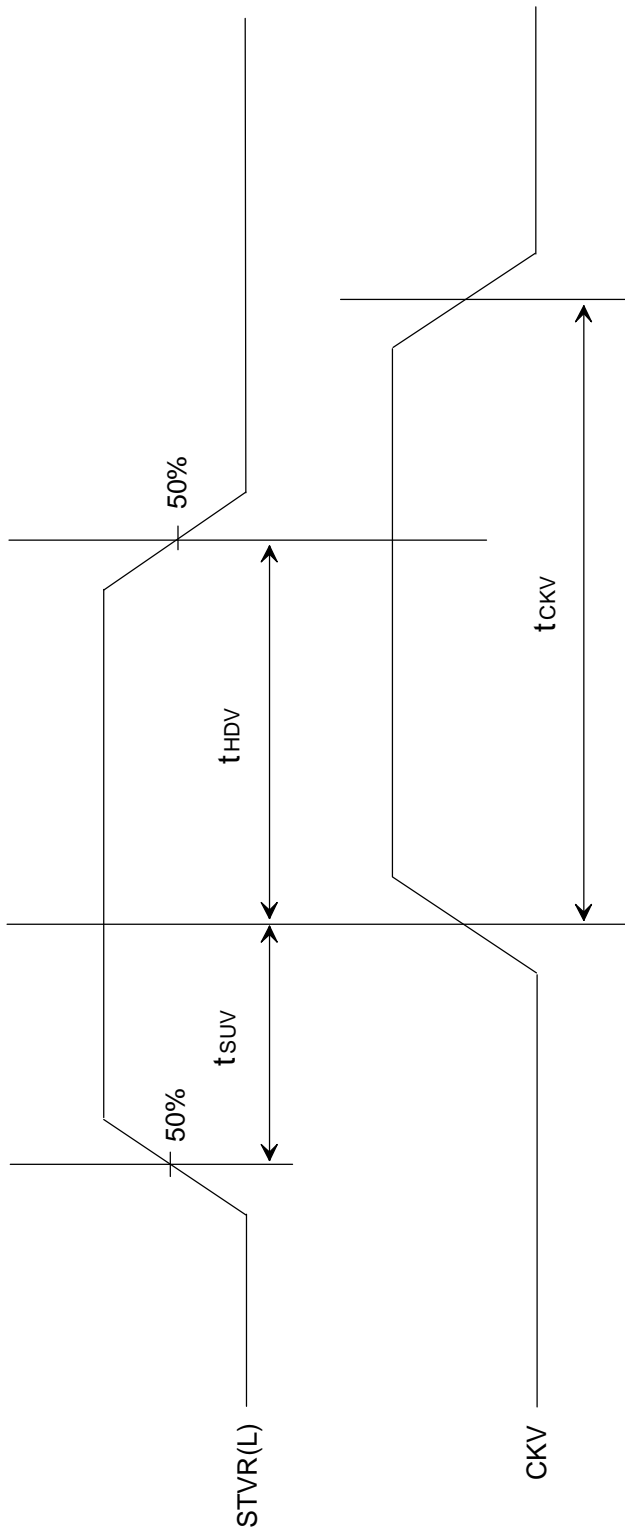


Fig.5 Vertical shift clock timing

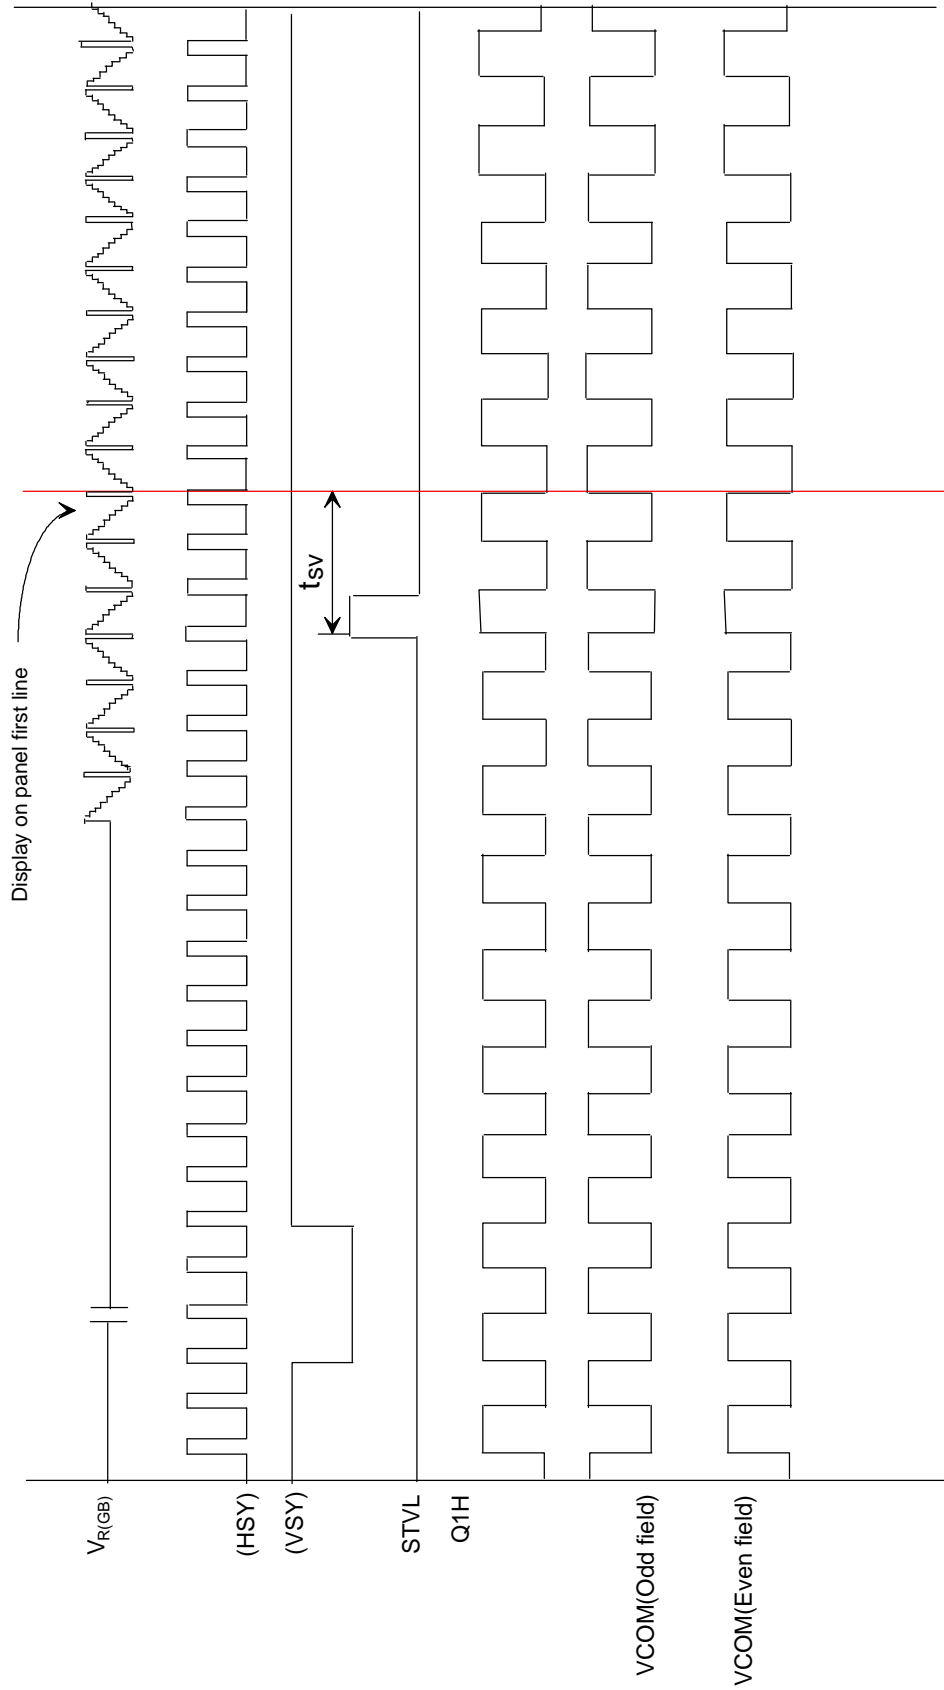


Fig.6-(a) Vertical timing (From up to down)

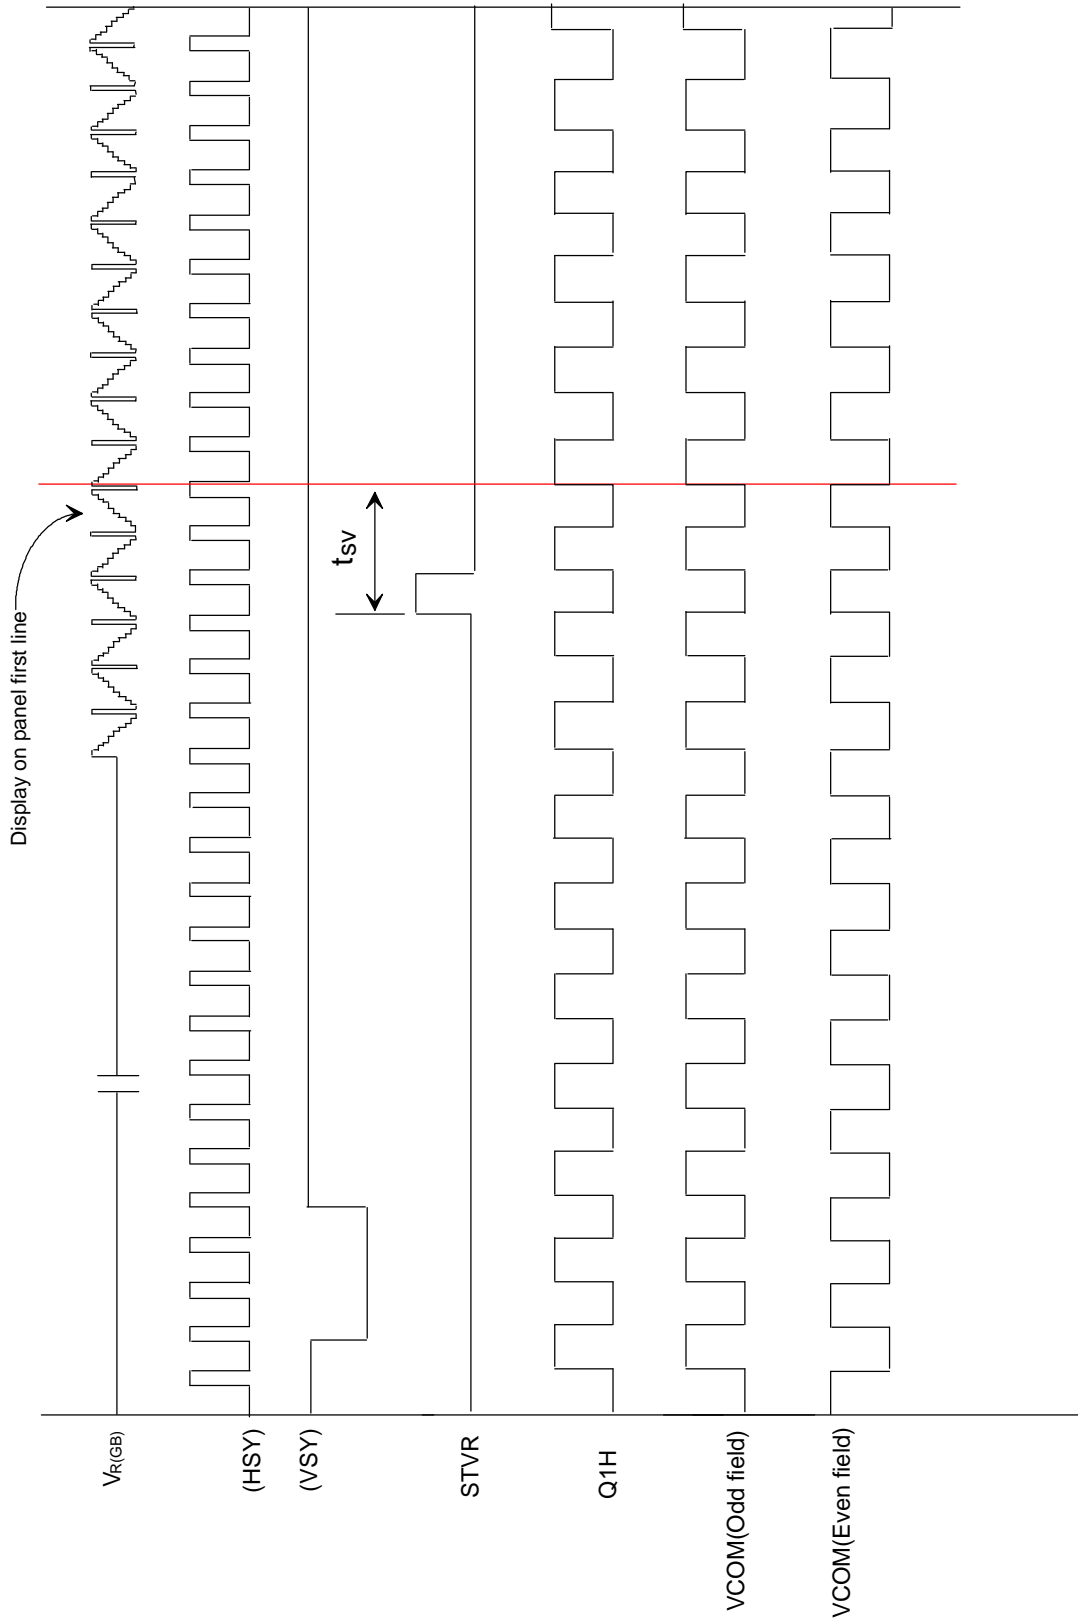


Fig.6-(b) Vertical timing (From down to up)

# UNIPAC OPTOELECTRONICS CORPORATION

## TERMS AND CONDITIONS OF SALE

(Revision: January 1996)

These Terms and Conditions of Sale apply to all items designed and/or made by Unipac Optoelectronics Corporation ("Unipac"), and Buyer agrees they apply to all such items.

### **1. ACCEPTANCE OF TERMS**

BUYER ACCEPTS THESE TERMS (i) BY WRITTEN ACCEPTANCE (BY PURCHASE ORDER OR OTHERWISE), OR (ii) BY FAILURE TO RETURN GOODS DESCRIBED ON THE FACE OF THIS FORM WITHIN FIVE DAYS OF THEIR DELIVERY.

### **2. DELIVERY**

- a. Delivery will be made Free Carrier (Incoterms), Unipac's warehouse, Science-Based Industrial Park, Taiwan.
- b. Title to the goods and the entire risk will pass to Buyer upon delivery to carrier.
- c. Shipments are subject to availability. Unipac shall make every reasonable effort to meet the date (s) quoted or acknowledged; and if Unipac makes such effort, Unipac will not be liable for any delays.

### **3. TERMS OF PAYMENT**

- a. Terms are as stated on Unipac's quotation, or if none are stated, net forty-five (45) days. Accounts past due will incur a monthly charge at the rate of one and one-half percent (1.5%) per month (or, if less, the maximum allowed by applicable law) to cover servicing costs.
- b. Unipac reserves the right to change credit terms at any time in its sole discretion.

### **4. LIMITED WARRANTY**

- a. Unipac warrants that the goods sold will be free from defects in material and workmanship and comply with Unipac's applicable published specifications for a period of sixty (60) days from the date of Unipac's shipment.
- b. Goods or parts which have been subject to abuse (including without limitation repeated or extended exposure to conditions at or near the limits of applicable absolute ratings) misuse, accident, alteration, neglect, or unauthorized repair or improper application are not covered by any warranty. No warranty is made with respect to custom products or goods produced to Buyer's specifications (unless specifically stated in a writing signed by Unipac).
- c. No warranty is made with respect to goods used in devices intended for use in applications where failure to perform when properly used can reasonably be expected to result in significant injury (including, without limitation, navigation, aviation or nuclear equipment, or for surgical implant or to support or sustain life) and Buyer agrees to indemnify, defend, and hold harmless Unipac from all claims, damages and liabilities arising out of any such uses.
- d. This Paragraph 4 is the only warranty by Unipac with respect to goods and may not be modified or amended except in writing signed by an authorized officer of Unipac.
- e. Buyer acknowledges and agrees that it is not relying on any applications, diagrams or circuits contained in any literature, and Buyer will test all parts and applications under extended field and laboratory conditions. Notwithstanding any cross-reference or any statements of compatibility, functionality, interchangeability, and the like, the goods may differ from similar goods from other vendors in performance, function or operation, and in areas not contained in the written specifications, or as to ranges and conditions outside such specifications; and Buyer agrees that there are no warranties and that Unipac is not responsible for such things.
- f. EXCEPT AS PROVIDED ABOVE, UNIPAC MAKES NO WARRANTIES OR CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY; AND UNIPAC EXPRESSLY EXCLUDES AND DISCLAIMS ANY WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE OR APPLICATION.

### **5. LIMITATION OF LIABILITY**

- a. Unipac will not be liable for any loss, damage or penalty resulting from causes beyond its reasonable control, including but not limited to delay by others, force majeure, acts of God, or labor conditions. In any such event, the date (s) for Unipac's performance will be deemed extended for a period equal to any delay resulting.
- b. THE LIABILITY OF UNIPAC ARISING OUT OF THIS CONTRACT OR ANY GOODS SOLD WILL BE LIMITED TO REFUND OF THE PURCHASE PRICE OR (WITH UNIPAC'S PRIOR WRITTEN CONSENT) REPAIR OR REPLACEMENT OF PURCHASED GOODS (RETURNED TO UNIPAC FREIGHT PRE-PAID).
- c. Buyer will not return any goods without first obtaining a customer return order number.
- d. AS A SEPARATE LIMITATION, IN NO EVENT WILL UNIPAC BE LIABLE FOR COSTS OF SUBSTITUTE GOODS; FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL OR INDIRECT DAMAGES; OR LOSS OF USE, OPPORTUNITY, MARKET POTENTIAL AND/OR PROFIT ON ANY THEORY (CONTRACT, TORT, FROM THIRD PARTY CLAIMS OR OTHERWISE). THESE LIMITATIONS SHALL APPLY NOTWITHSTANDING ANY FAILURE OF ESSENTIAL PURPOSE OF ANY REMEDY.

e. No action against Unipac, whether for breach, indemnification, contribution or otherwise, shall be commenced more than one year after the cause of action has accrued, or more than one year after either the Buyer, user or other person knew or with reasonable diligence should have known of the matter or of any claim of dissatisfaction or defect involved; and no such claim may be brought unless Unipac has first been given commercially reasonable notice, a full written explanation of all pertinent details, and a good faith opportunity to resolve the matter.

f. BUYER EXPRESSLY AGREES TO THE LIMITATIONS OF THIS PARAGRAPH 5 AND TO THEIR REASONABLENESS.

### **6. SUBSTITUTIONS AND MODIFICATIONS**

Unipac may at any time make substitutions for product ordered which do not materially and adversely affect overall performance with the then current specifications in the typical and intended use. Unipac reserves the right to halt deliveries and shipments and alter specifications and prices without notice. Buyer shall verify that the literature and information is current before purchasing.

### **7. CANCELLATION**

- a. This contract may not be canceled by Buyer except with written consent by Unipac and Buyer's payment of reasonable cancellation charges (including but not be limited to expenses already incurred for labor and material, overhead, commitments made by Unipac, and a reasonable profit).
- b. In no event will Buyer have rights in partially completed goods.

### **8. INDEMNIFICATION**

Unipac will, at its own expense, assist Buyer with technical support and information in connection with any claim that any parts as shipped by Unipac under this purchase order infringe any valid, enforceable, unexpired R.O.C. patent, copyright, or trademark, provided however, that Buyer (i) gives immediate written notice to Unipac, (ii) permits Unipac to participate and to defend if Unipac requests to do so, and (iii) gives Unipac all needed information, assistance and authority. However, Unipac will not be responsible for infringements resulting from anything not entirely manufactured by Unipac, or from any combination with products, equipment, or materials not furnished by Unipac. Unipac will have no liability with respect to intellectual property matters arising out of products made to Buyer's specifications, code, or designs.

Except as expressly stated in this Paragraph 8 or in another writing signed by an authorized officer, Unipac makes no representations and/or warranties with respect to intellectual and/or industrial property and/or with respect to claims of infringement. Except as to claims Unipac agrees in writing to defend, BUYER WILL INDEMNIFY, DEFEND AND HOLD HARMLESS UNIPAC FROM ALL CLAIMS, COSTS, LOSSES, AND DAMAGES (INCLUDING ATTORNEYS FEES) AGAINST AND/OR ARISING OUT OF GOODS SOLD AND/OR SHIPPED HEREUNDER.

### **9. NO CONFIDENTIAL INFORMATION**

Unipac shall have no obligation to hold any information in confidence except as provided in a separate non-disclosure agreement signed by both parties.

### **10. ENTIRE AGREEMENT**

- a. These terms and conditions are the entire agreement between Unipac and Buyer, and no addition, deletion or modification shall be binding on Unipac unless expressly agreed to in a writing signed by an officer of Unipac.
- b. Buyer is not relying upon any warranty or representation except for those specifically stated here.

### **11. APPLICABLE LAW**

This contract and all performance and disputes arising out of or relating to goods involved will be governed by the laws of Taiwan, Republic of China, without reference to conflict of laws principles and excluding the U.N. Convention on Contracts for the International Sale of Goods. Buyer agrees at its sole expense to comply with all applicable laws in connection with the purchase, use or sale of the goods provided hereunder.

### **12. JURISDICTION AND VENUE**

The courts located in Taiwan, Republic of China, will have the sole and exclusive jurisdiction and venue over any dispute arising out of or relating to this contract or any sale of goods hereunder, and Buyer hereby consents to the jurisdiction of such courts.

### **13. ATTORNEYS' FEES**

Reasonable attorneys' fees and costs will be awarded to the prevailing party in the event of litigation involving the enforcement or interpretation of this contract.

**Unipac optoelectronics corp.**

**No.3 Industry E. Rd III,  
Science-Based Industrial Park,  
Hsin-Chu City, Taiwan, R.O.C.**

**Fax:886-3-5772545**

**Tel :886-3-5772700**