



- The smallest UL recognized motor protector sealed in PBT enclosure (Stronger than UP6)
- More than 10 million units shipped per annum (2009)
- More than 30 years of long-seller
- Japan/Hong Kong/Europe, three global production sites
- Recognized by UL for Motor Protector

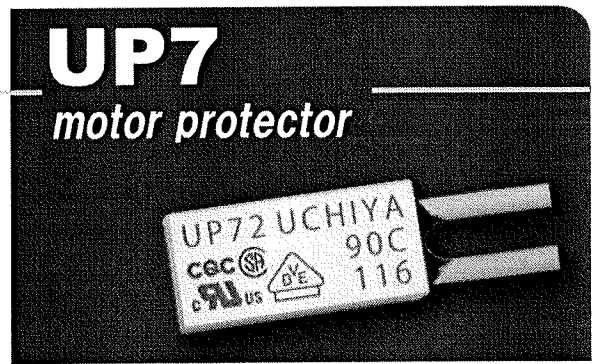

Specifications

- Operating Temp 55°C~150°C(5°C step)
- Tolerance ±5°C、±7°C、±10°C
- Differential 30±15K(Standard)
- Breaking Capacity
 - 4A 125V AC 6000cycle(resistive)
 - 2.5A 250V AC 10000cycle(resistive)

Dimensions



Applications

- Overheating Protection
- Small motor
- Transformer
- Power Supply
- Lighting Fixture
- Projector



Safety Approval

※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Rating	Max temp	File No.
UP71 UP72	UL	UL2111	Motor Protector	125V/250V AC 0.373 kW	150°C	E52703
	c-UL	CSA C22.2 No.77	Motor Protector	125V/250V AC 0.373 kW	150°C	E52703
	CSA	CSA C22.2 No.77	Motor Protector	1.5A 120V AC (FLA)	150°C	035080
	CSA	CSA C22.2 No.77	Motor Protector	1.25A 250V AC (FLA)	150°C	035080
	CQC	GB14536.10	Thermostat (Non-fused bimetal-type)	4A/125V, 2.5A/250V AC	150°C	CQC04002009091 CQC03002008321
UP7 UP71 UP72	EN (VDE)	EN 60730-2-2	Thermal Motor Protector	250V AC	150°C	892100-4510-0026
	EN (VDE)	EN 60730-2-9	Thermal Cut-out	2.5A(1.6A) /250V AC resistive (inductive) 10000 cycles	150°C	892100-4510-0027
	EN (VDE)	EN 60730-2-9	Thermal Cut-out	0.5A /250V AC (resistive) 100000 cycles	150°C	892100-4510-0027

Graph Left: Tripping Time vs Current (at 25°C)

Graph Right: Operating Temp. Drop due to Current

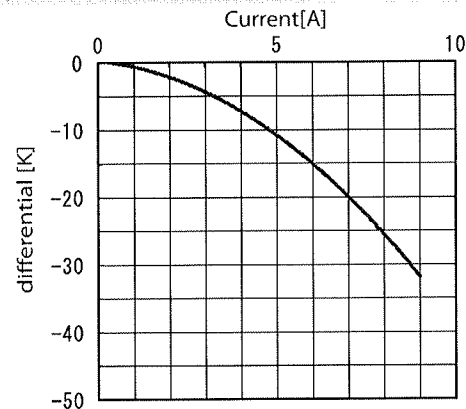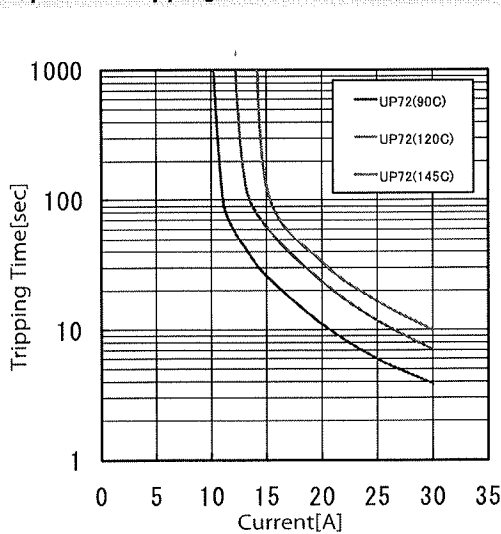

Variation

Lead	None
1	Uninsulated Solid
2	insulated wire

Further information, write or call:

UCHIYA THERMOSTAT CO., LTD.
2-176-1 TAKASU, MISATO-SHI,
SAITAMA-KEN 341-0037, JAPAN

E-mail: sales@uchiya.co.jp
URL: http://www.uchiya.co.jp
TEL: (+81)-48-955-4181
FAX: (+81)-48-956-1310

ウチヤ・サモスタット株式会社
UCHIYA THERMOSTAT CO., LTD.