

FEATURES

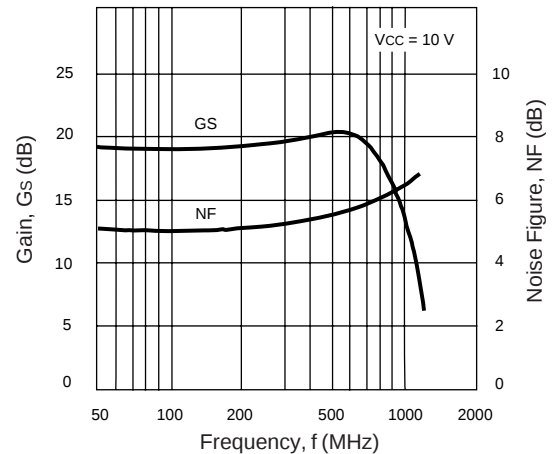
- 850 MHz FREQUENCY RESPONSE @ 3 dB DOWN
- POWER GAIN OF 19 dB @ $f = 500$ MHz
- 10.5 dBm OUTPUT POWER
- LOW COST PACKAGE
- 50 Ω GAIN BLOCK

DESCRIPTION

The UPC1656C is a silicon monolithic integrated circuit especially designed as a wide-band amplifier covering the HF band through UHF band.

NEC's stringent quality assurance and test procedures ensure the highest reliability and performance.

NOISE FIGURE AND VOLTAGE GAIN
vs. FREQUENCY



ELECTRICAL CHARACTERISTICS (T_A = 25°C, V_{CC} = 10 V, f = 500 MHz)






PART NUMBER PACKAGE OUTLINE			UPC1656C C08		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
I _{CC}	Circuit Current	mA	38	43	48
G _s	Small Signal Gain	dB	17	19	21
BW	Bandwidth (The gain is 3 dB down from the gain at 100 MHz)	MHz	750	850	
P _{SAT}	Saturated Output Power	dBm	9	10.5	
NF	Noise Figure	dB		5.5	6.5
RL _{IN}	Input Return Loss	dB	17	20	
RL _{OUT}	Output Return Loss	dB	4	7	
ISOL	Isolation	dB	24	27	

ABSOLUTE MAXIMUM RATINGS¹ ($T_A = 25^\circ\text{C}$)

SYMBOLS	PARAMETERS	UNITS	RATINGS
V_{CC}	Supply Voltage	V	11
P_T	Total Power Dissipation ²	mW	600
T_{OP}	Operating Temperature	$^\circ\text{C}$	-20 to +75
T_{STG}	Storage Temperature	$^\circ\text{C}$	-40 to +125

Note:

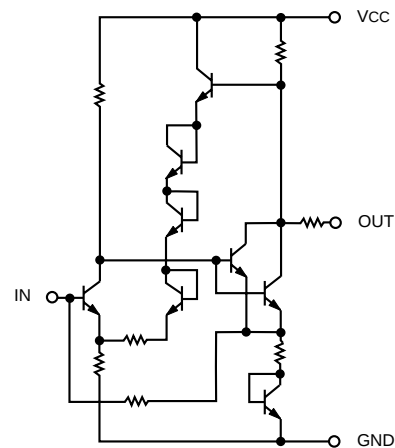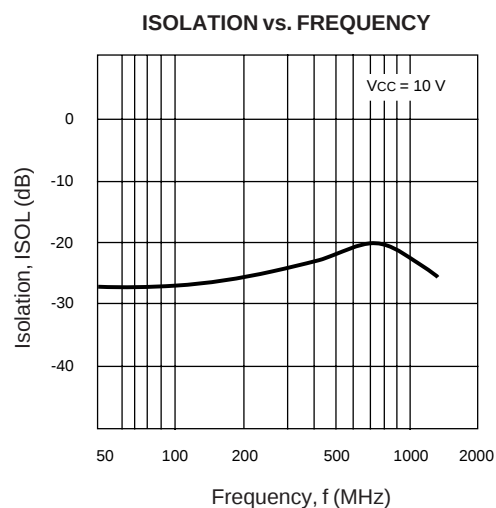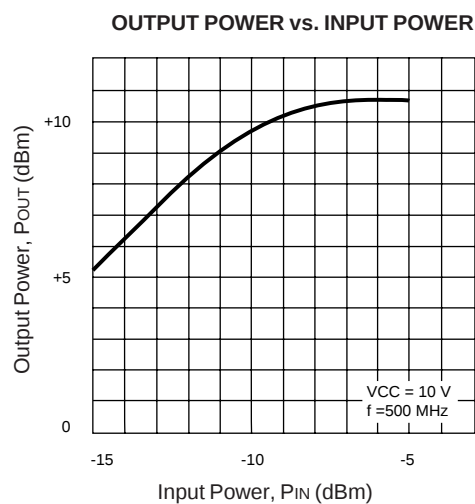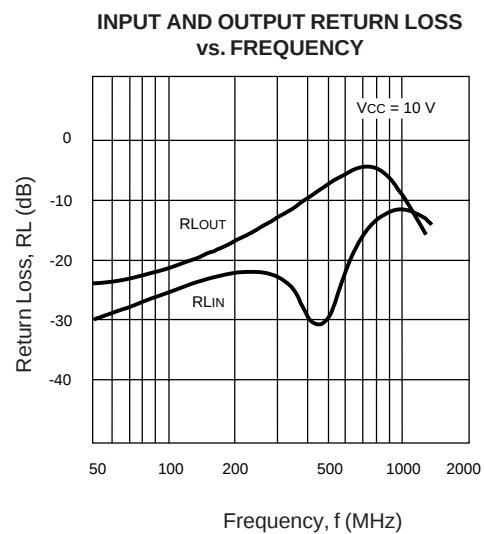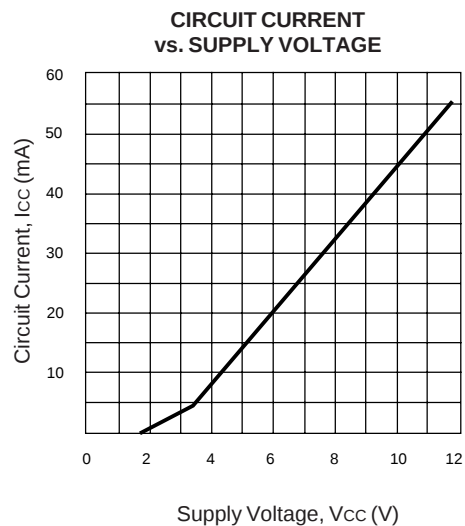1. Operation in excess of any one of these parameters may result in permanent damage.
2. At $T_A = +85^\circ\text{C}$.


EQUIVALENT CIRCUIT**TYPICAL PERFORMANCE CURVES** ($T_A = 25^\circ\text{C}$)

TYPICAL SCATTERING PARAMETERS

UPC1656C
Vcc = 10 V, Icc = 43 mA

FREQUENCY	S11		S21		S12		S22		K	S21
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG		dB
50	0.110	-7	8.749	-11	0.042	4	0.062	163	1.53	18.8
100	0.120	-2	8.765	-24	0.043	-2	0.078	131	1.50	18.9
150	0.129	-2	8.694	-37	0.046	-2	0.107	109	1.43	18.8
200	0.140	-8	8.723	-50	0.046	-0	0.140	94	1.41	18.8
250	0.143	-12	8.639	-62	0.045	-6	0.174	84	1.44	18.7
300	0.140	-20	8.570	-75	0.048	-4	0.210	72	1.36	18.7
350	0.140	-26	8.468	-88	0.052	-10	0.246	62	1.29	18.6
400	0.130	-33	8.267	-101	0.053	-13	0.296	54	1.27	18.3
450	0.123	-40	8.145	-115	0.054	-13	0.333	44	1.24	18.2
500	0.106	-47	7.942	-128	0.056	-16	0.369	34	1.21	18.0
550	0.088	-50	7.670	-141	0.059	-19	0.402	23	1.17	17.7
600	0.072	-55	7.398	-155	0.063	-25	0.441	13	1.12	17.4
650	0.053	-52	7.015	-169	0.064	-33	0.465	2	1.12	16.9
700	0.040	-35	6.624	178	0.064	-37	0.477	-9	1.14	16.4
750	0.038	-7	6.202	164	0.068	-40	0.484	-20	1.13	15.9
800	0.047	7	5.710	151	0.068	-45	0.483	-30	1.19	15.1
850	0.065	13	5.208	139	0.069	-51	0.465	-40	1.28	14.3
900	0.079	11	4.804	126	0.070	-56	0.442	-50	1.37	13.6
950	0.088	8	4.341	116	0.067	-64	0.419	-60	1.56	12.8
1000	0.096	4	3.960	104	0.065	-67	0.389	-67	1.77	12.0

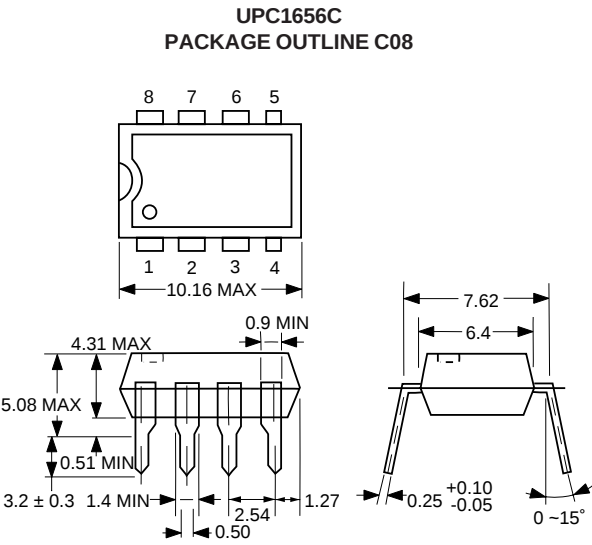OUTLINE DIMENSIONS (Units in mm)



Note:
All dimensions are typical unless otherwise specified.