

# $\mu$ PC277 / 393

## Low Power Dual Comparators

### GENERAL DESCRIPTION


The  $\mu$ PC277/393 are dual comparators which are designed to operate from a single power supply over a wide range of voltage. Operation from split power supplies is also possible and the power supply current drain is very low. Further advantage, the input common-mode voltage includes ground, even though operated from a single power supply voltage.

Two kinds of ICs are available according to reliability, the  $\mu$ PC277 for industry, the  $\mu$ PC393 for commercial.

### FEATURES

- Input Common-Mode Voltage Range Includes Ground
- Wide Power Supply Range  
Single Supply 2 V to 36 V DC  
Dual Supplies  $\pm 1$  V to  $\pm 18$  V DC
- Low Power Consumption
- Compatible with All Forms Logic
- LM393 Direct Replacement

### EQUIVALENT CIRCUIT

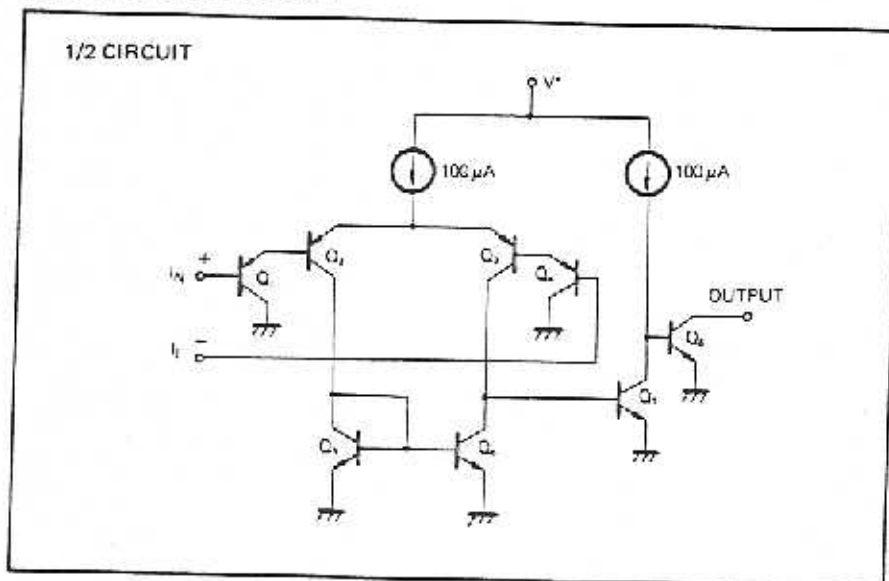

### ORDERING INFORMATION

$\mu$ PC277D



8 pin Ceramic DIP  
(Dual In-Line Package)

$\mu$ PC277C/ $\mu$ PC393C




8 pin Plastic Molded DIP  
(Dual In-Line Package)

$\mu$ PC277G/ $\mu$ PC393G



8 pin Plastic Molded Flat Package  
(MINI FLAT IC)

### CONNECTION DIAGRAM (Top View)

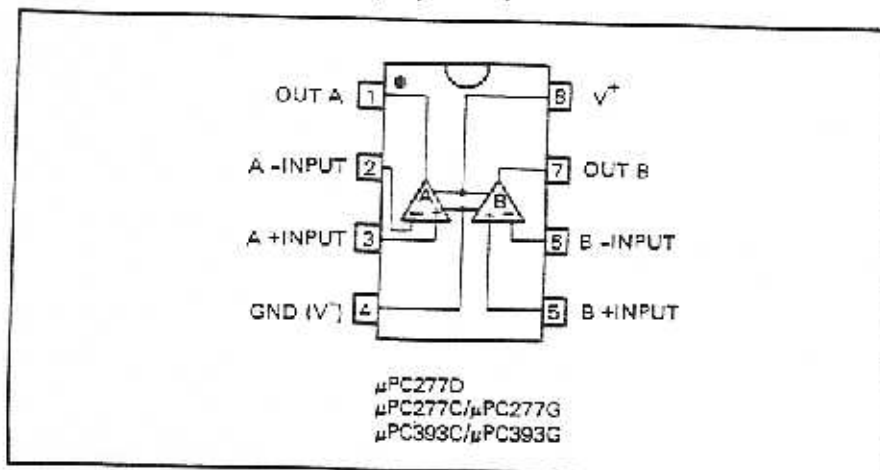

**ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)**



PARAMETER		μPC277	μPC393	UNIT
Voltage between V <sup>+</sup> and V <sup>-</sup>		36	36	V
Differential Input Voltage		36	36	V
Common Mode Input Voltage		-0.3 to +36	-0.3 to +36	V
Power Dissipation*	D Package	500	-	mW
	C Package	350	350	
	G Package	440	440	
Output Short Circuit to Ground		Indefinite	Indefinite	s
Operating Temperature Range	D Package	-20 to +80	-	°C
	C or G Package	-20 to +70	0 to +70	
Storage Temperature Range	D Package	-55 to +150	-	°C
	C or G Package	-55 to +125	-55 to +125	

\* See thermal information in chapter 11.

**ELECTRICAL CHARACTERISTICS (Ta = 25°C, V<sup>+</sup> = 5V)**

CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Input Offset Voltage		2	5	mV	V <sub>o</sub> = 1.4 V, V <sub>REF</sub> = 1.4 V, R <sub>s</sub> = 0 Ω
Input Bias Current		25	250	nA	V <sub>o</sub> ≈ 1.4 V
Input Offset Current		5	50	nA	V <sub>o</sub> ≈ 1.4 V
Common Mode Input Voltage Range	0		V <sup>+</sup> - 1.5	V	
Supply Current		0.6	1	mA	R <sub>L</sub> = ∞
Voltage Gain		200		V/mV	R <sub>L</sub> = 15 kΩ
Large Signal Response Time		1.3		μs	R <sub>L</sub> = 5.1 kΩ, V <sub>RL</sub> = 5 V
Output Sink Current	6	16		mA	V <sub>IN(-)}</sub> = 1 V, V <sub>IN(+)</sub> = 0 V, V <sub>o</sub> ≤ 1.5 V
Saturation Voltage		0.2	0.4	V	V <sub>IN(-)}</sub> = 1 V, V <sub>IN(+)</sub> = 0 V, I <sub>sink</sub> = 3 mA
Output Leakage Current		0.1		nA	V <sub>IN(+)</sub> = 1 V, V <sub>IN(-)</sub> = 0 V, V <sub>o</sub> = 5 V

**TYPICAL APPLICATIONS**

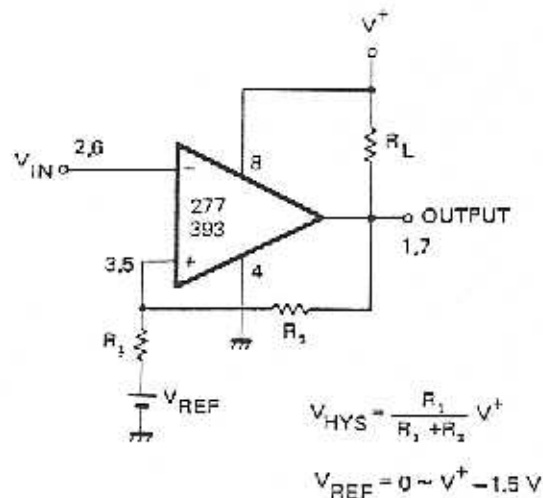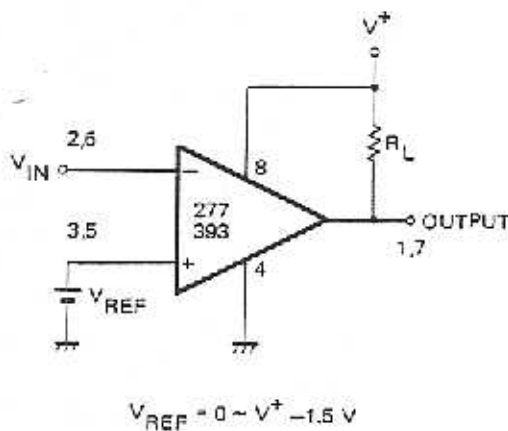

TYPICAL PERFORMANCE CHARACTERISTICS (Ta=25 °C)

