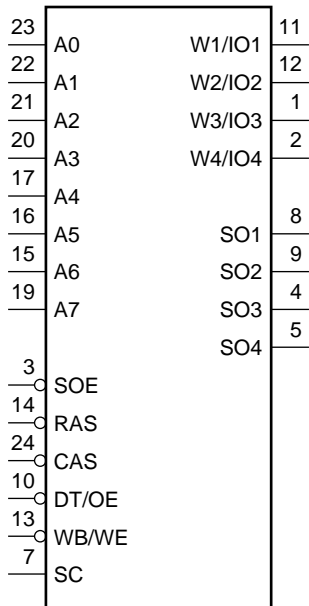
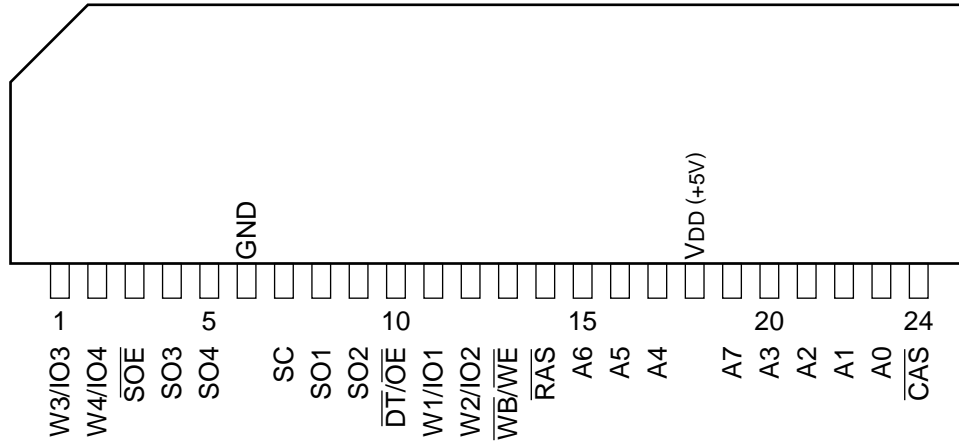

C-MOS DUALPORT GRAPHIC BUFFER
-SIDE VIEW-



INPUT

- A0-A7 ; ADDRESS
- CAS ; COLUMN ADDRESS STROBE
- DT ; DATA TRANSFER CONTROL
- OE ; OUTPUT ENABLE
- RAS ; ROW ADDRESS STROBE
- SC ; SERIAL CONTROL CLOCK
- SOE ; SERIAL OUTPUT ENABLE
- W1-W4 ; WRITE PAR BIT SELECT DATA
- WB ; WRITE PAR BIT CONTROL
- WE ; WRITE ENABLE

OUTPUT

- SO1-SO4 ; SERIAL DATA

INPUT/OUTPUT

- IO1-IO4 ; DATA

