


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4464: ADDED 03M AND 4M LENGTHS	12/30/09	D.FRISIELLO
E	ECN 99999: RETURNED L-COM LOGO TO P1 CONNECTOR	1/5/10	D.FRISIELLO
F	ECN 5868: ADDED LENGTH 075 M, REVISED WIRE MAP & PACKAGING NOTE	12/7/11	D.FRISIELLO
G	ECN 5934: REVISED L-COM LOGO'S TO NEWEST	1/19/12	D.FRISIELLO

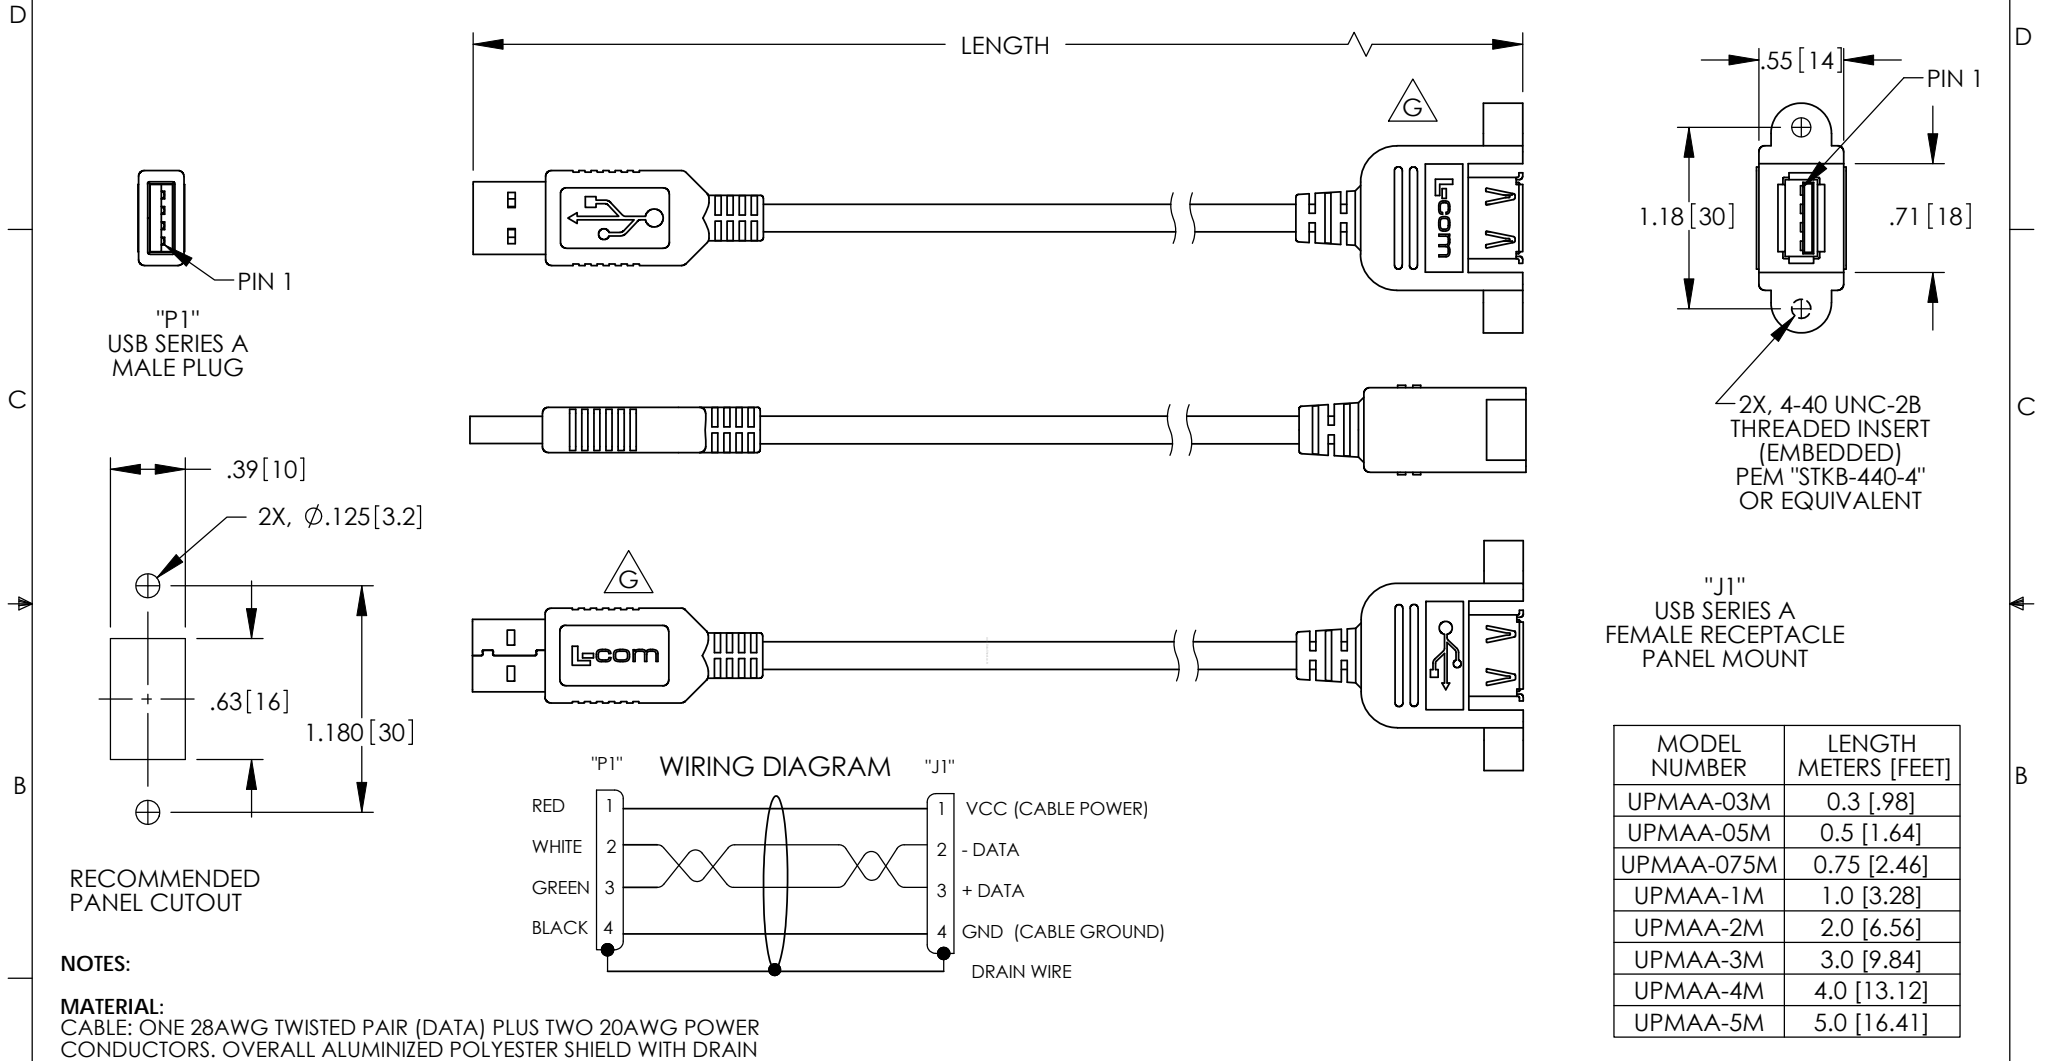

NOTES:

MATERIAL:
 CABLE: ONE 28AWG TWISTED PAIR (DATA) PLUS TWO 20AWG POWER CONDUCTORS. OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD.
 JACKET: PVC, LIGHT GRAY (PANTONE 400C)
 MOLDED HOODS: PVC, LIGHT GRAY (PANTONE 400C)

FINISH:
 CONTACT FINISH 30µ IN GOLD OVER 50µ IN NICKEL PLATE

MISCELLANEOUS:
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 INCLUDE MOUNTING HARDWARE 2X #4-40 X .38 LG. PHILLIPS PAN HD SCREW.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY: D.FRISIELLO CHECKED BY: D.FORTIN APPROVED BY: S.SMITH	DATE 4/18/08 4/18/08 4/18/08	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY USB
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	PRODUCT DESCRIPTION USB A PLUG TO A RECEPT PNL MT THRD
	SCALE: NONE		FSCM NO. 43321	DWG. NO. UPMAA
CAD FILE: UPMAA.SLDDRW			SHEET 1 OF 1	