

UR56XX

CMOS IC

18-V INPUT VOLTAGE 500MA ULTRA LOW IQ VOLTAGE REGULATOR

■ DESCRIPTION

The UTC **UR56XX** Series are a low dropout regulator with wide input voltage range, high output voltage accuracy, ultra low quiescent current and low dropout. This regulator is based on a CMOS process, and its input voltage could high enough more than 18V, thus they are very suitable for high voltage application.

■ FEATURES

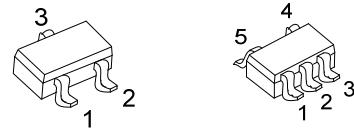
- * High output voltage accuracy: $\pm 2\%$
- * Ultra low quiescent current: 1.0uA (Typ.)
- * Low temperature-drift coefficient of V_{OUT} : $\pm 100\text{ppm}/^\circ\text{C}$ (Typ.)
- * Wide Input voltage range: 0~18V

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment					Packing
Lead Free	Halogen Free		1	2	3	4	5	
UR56XXL-AB3-R	UR56XXG-AB3-R	SOT-89	G	I	O	-	-	Tape Reel
UR56XXL-AE2-R	UR56XXG-AE2-R	SOT-23-3	G	O	I	-	-	Tape Reel
UR56XXL-AE5-R	UR56XXG-AE5-R	SOT-23-5	I	G	N	N	O	Tape Reel
UR56XXL-T92-B	UR56XXG-T92-B	TO-92	G	I	O	-	-	Tape Box
UR56XXL-T92-K	UR56XXG-T92-K	TO-92	G	I	O	-	-	Bulk

Note: Pin assignment: G: Ground I: V_{IN} O: V_{OUT}

UR56XXG-AB3-R  <ul style="list-style-type: none"> (1)Packing Type (2)Package Type (4)Green Package (5)Output Voltage Code 	<ul style="list-style-type: none"> (1) R: Tape Reel, B: Tape Box, K: Bulk (2) AB3: SOT-89, AE2: SOT-23-3, AE5: SOT-23-5 (4) G: Halogen Free and Lead Free, L: Lead Free (5) XX: Refer to Marking Information
---	--

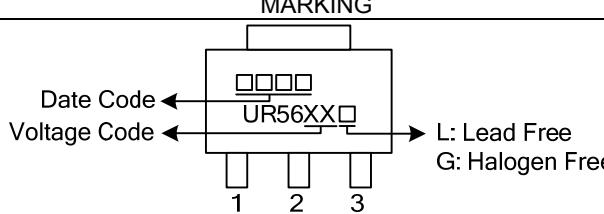

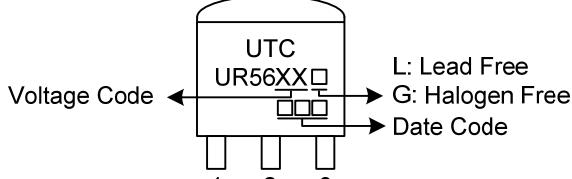



SOT-23-3 (JEDEC TO-236) SOT-23-5 (JEDEC TO-236)



SOT-89 TO-92

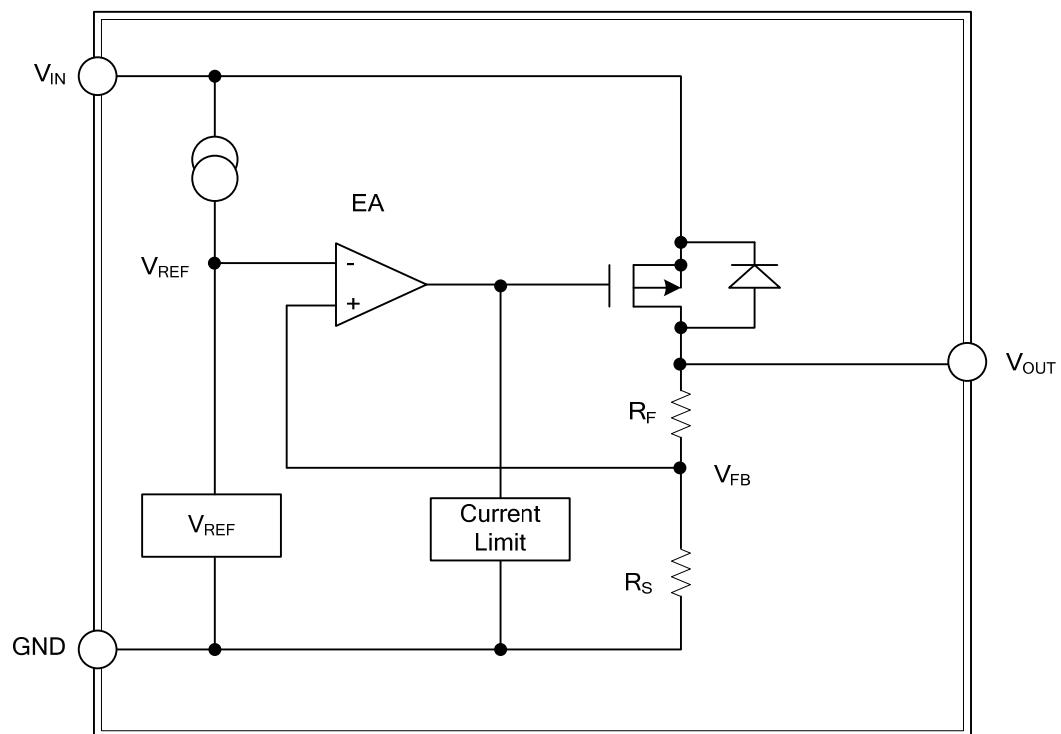
■ MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-89	15:1.5V 18:1.8V 21:2.1V 23:2.3V 25:2.5V 27:2.7V 30:3.0V 33:3.3V 36:3.6V 40:4.0V 44:4.4V 50:5.0V 60:6.0V 70:7.0V 80:8.0V 90:9.0V 10:10V 12:12V	 <p>Date Code ← Voltage Code ← UR56XX → 1 2 3 L: Lead Free G: Halogen Free</p>
SOT-23-3		 <p>3 R56XX → Voltage Code 1 2</p>
TO-92		 <p>Voltage Code ← UTC UR56XX → 1 2 3 L: Lead Free G: Halogen Free Date Code</p>
SOT-23-5		 <p>5 4 R56 XX → Voltage Code 1 2 3</p>

■ PIN DESCRIPTION

PIN NO.				PIN NAME	DESCRIPTION
TO-92	SOT-89	SOT-23-3	SOT-23-5		
1	1	1	2	GND	Ground
2	2	3	1	V _{IN}	Input voltage.
3	3	2	5	V _{OUT}	Regulated output voltage
-	-	-	3/4	NC	No connect

■ BLOCK DIAGRAM



■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT	
Input Voltage	V _{IN}	18	V	
Output Voltage	V _{OUT}	12	V	
Power Dissipation	SOT-23-3	P _D	200	mW
	SOT-23-5		250	mW
	SOT-89 TO-92		500	mW
Operating Temperature Range	T _{OPR}	-40 ~ +85	°C	
Storage Temperature Range	T _{STG}	-40 ~ +125	°C	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

UTC UR5615

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	1.47	1.5	1.53	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =60mA		100	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5618

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	1.764	1.8	1.836	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =60mA		100	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5621

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	2.058	2.1	2.142	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =80mA		120	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

■ ELECTRICAL CHARACTERISTICS (Cont.)

UTC UR5623

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	2.254	2.3	2.346	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =80mA		120	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5625

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	2.45	2.5	2.55	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =80mA		120	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5627

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	2.646	2.7	2.754	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =80mA		120	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5630

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	2.94	3.0	3.06	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =80mA		120	150	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	ΔV_{OUT2}	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

■ ELECTRICAL CHARACTERISTICS (Cont.)

UTC UR5633

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	3.234	3.3	3.366	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =100mA		160	200	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5636

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	3.528	3.6	3.672	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =100mA		160	200	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5640

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	3.92	4.0	4.08	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =100mA		160	200	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5644

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	4.312	4.4	4.488	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =100mA		170	200	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

■ ELECTRICAL CHARACTERISTICS (Cont.)

UTC UR5650

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	4.9	5.0	5.1	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =100mA		170	200	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5660

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	5.88	6.0	6.12	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =200mA		200	240	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		1.0	3.0	uA

UTC UR5670

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	6.86	7.0	7.14	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =200mA		200	240	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		2.0	5.0	uA

UTC UR5680

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	7.84	8.0	8.16	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =200mA		200	240	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		2.0	5.0	uA

■ ELECTRICAL CHARACTERISTICS (Cont.)

UTC UR5690

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	8.82	9.0	9.18	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =200mA		200	240	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		2.0	5.0	uA

UTC UR5610

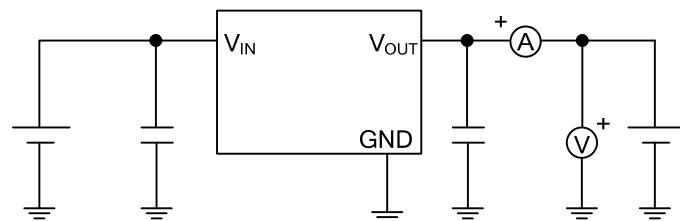
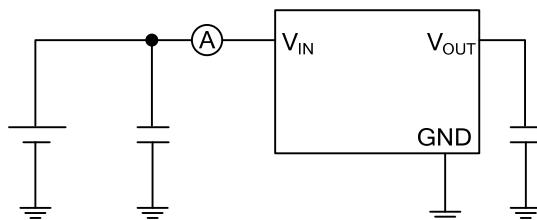
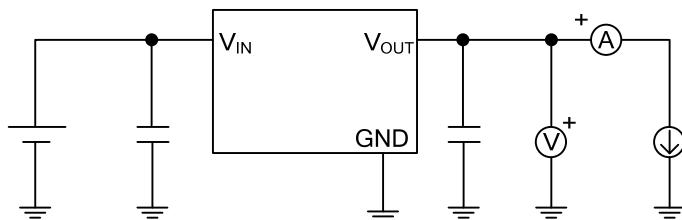
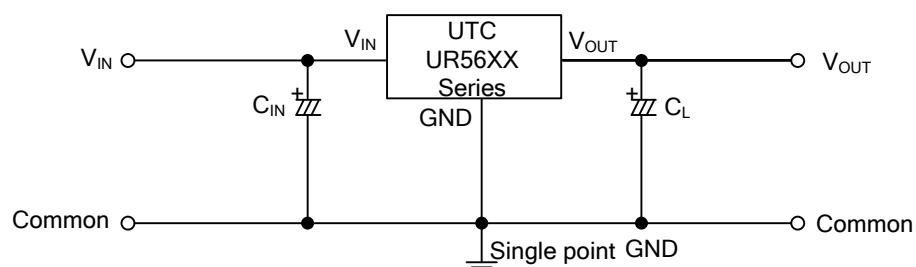
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	9.8	10.0	10.2	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =200mA		200	240	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		2.0	5.0	uA

UTC UR5612

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA	11.76	12.0	12.24	V
Output Current (Note 1)	I _{OUT}	V _{IN} =V _{OUT} +2V	500			mA
Dropout Voltage (Note 2)	V _{DROP}	I _{OUT} =200mA		200	240	mV
Line Regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT} +2V≤V _{IN} ≤16V, I _{OUT} =1mA		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT2}}{V_{OUT}}$	V _{IN} =V _{OUT} +2V, 1.0mA≤I _{OUT} ≤100mA		30	80	mV
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT1}}{T_A \cdot V_{OUT}}$	V _{IN} =V _{OUT} +2V, I _{OUT} =10mA, -40°C≤T _A ≤85°C		±100		ppm/°C
Supply Current	I _{SS1}	V _{IN} =V _{OUT} +2V		2.0	5.0	uA

Notes: 1. Increase the output current slowly, record the current when V_{OUT} decrease 98% of V_{OUT}.

2. V_{drop}=V_{IN1}-(V_{OUT}×0.98), V_{OUT}: V_{IN}=V_{OUT}+2V, I_{OUT}=1mA

■ TEST CIRCUIT**■ TYPICAL APPLICATION CIRCUIT**

$C_{IN} > 1.0\mu F$

$C_L > 2.2\mu F$ (tantalum capacitor)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

