


### Features

- \* For surface mounted application
- \* Extremely Low Thermal Resistance
- \* Easy Pick and Place
- \* High Temp Soldering: 250°C For 10seconds at Terminals
- \* Superfast Recovery Times For High Efficiency



### Package Outline Dimensions in inches (millimeters)

#### SMB:

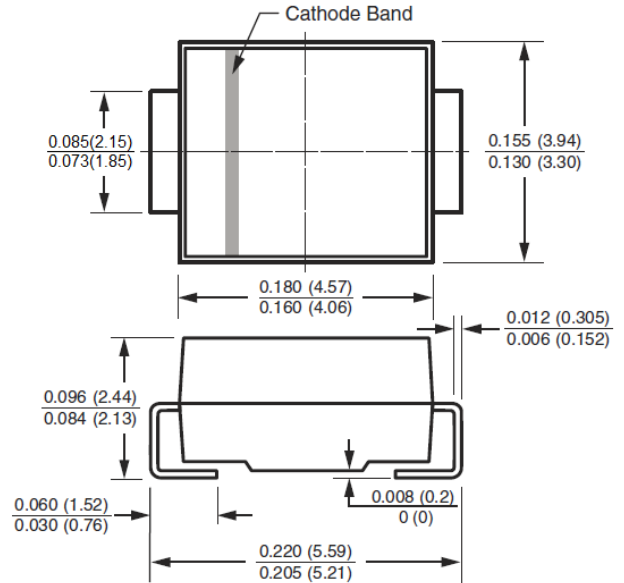

### Mechanical Data

- \* Case: Molded plastic
- \* Terminals: Solder plated
- \* Polarity: Indicated by cathode band
- \* Standard packaging:  
12mm tape(ELA STD RS-481)

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Type Number   | Symbols         | US2A        | US2B | US2D | US2G | US2J | US2K | US2M | Unit                      |
|---|-----------------|-------------|------|------|------|------|------|------|---------------------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 50          | 100  | 200  | 400  | 600  | 800  | 1000 | V                         |
| Maximum RMS Voltage   | $V_{RMS}$       | 35          | 70   | 140  | 280  | 420  | 560  | 700  | V                         |
| Maximum D.C Blocking Voltage  | $V_{DC}$        | 50          | 100  | 200  | 400  | 600  | 800  | 1000 | V                         |
| Maximum Average Forward Rectified Current $T_L=90^\circ\text{C}$  | $I_{F(AV)}$     | 2           |      |      |      |      |      |      | A                         |
| Peak Forward Surge Current, 8.3ms single half sine-wave   | $I_{FSM}$       | 50          |      |      |      |      |      |      | A                         |
| Maximum Instantaneous Forward Voltage at 2A(Note1)  | $V_F$           | 1.0         |      | 1.3  |      | 1.7  |      | V    |                           |
| Maximum D.C Reverse Current @ $T_A=25^\circ\text{C}$<br>at Rated D.C Blocking Voltage @ $T_A=125^\circ\text{C}$ | $I_R$           | 5<br>350    |      |      |      |      |      |      | $\mu\text{A}$             |
| Maximum Reverse Recovery Time(Note2)  | $T_{rr}$        | 50          |      |      |      | 75   |      |      | nS                        |
| Typical Junction Capacitance(Note3)   | $C_J$           | 28          |      |      |      |      |      |      | pF                        |
| Typical Thermal Resistance(Note4)   | $R_{\theta JA}$ | 20          |      |      |      |      |      |      | $^\circ\text{C}/\text{W}$ |
| Operating and Storage Temperature Range   | $T_J/T_{STG}$   | -50 to +150 |      |      |      |      |      |      | $^\circ\text{C}$          |


NOTE: 1、 Pulse test:  $t_p=300\mu\text{s}$ , 1% duty cycle    2、 Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$ .

3、 Measured at 1MHz and applied reverse voltage of 4.0V D.C.    4、 P.C.B. mounted with  $0.2 \times 0.2$ " ( $5.0 \times 5.0\text{mm}$ ) copper pad areas

### Ratings and Characteristic Curves


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

**FIG. 1- FORWARD CURRENT DERATING CURVE**

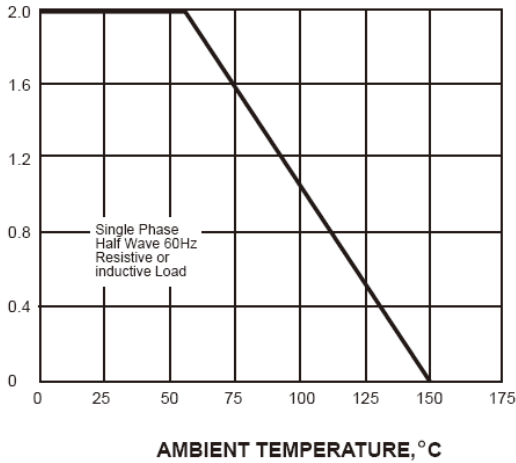


PEAK FORWARD SURGE CURRENT, AMPERES

**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

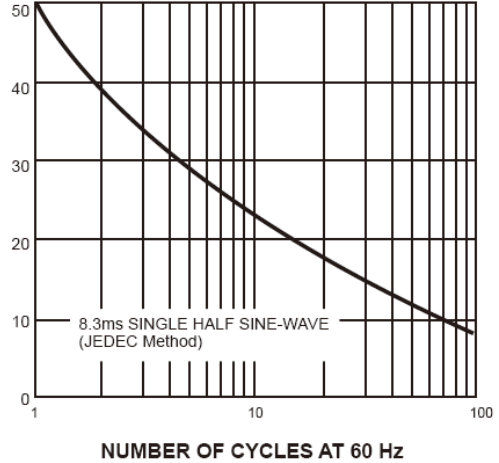


INSTANTANEOUS FORWARD CURRENT, AMPERES

**FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

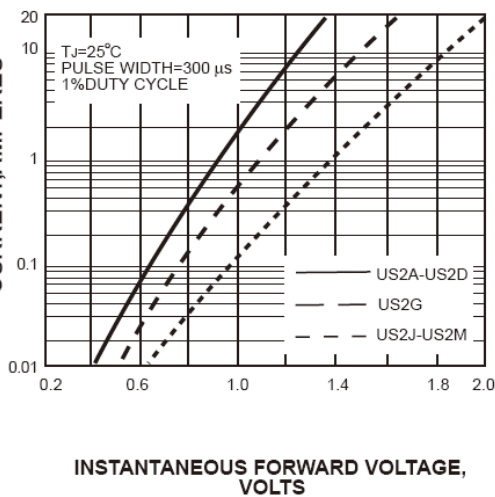


INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

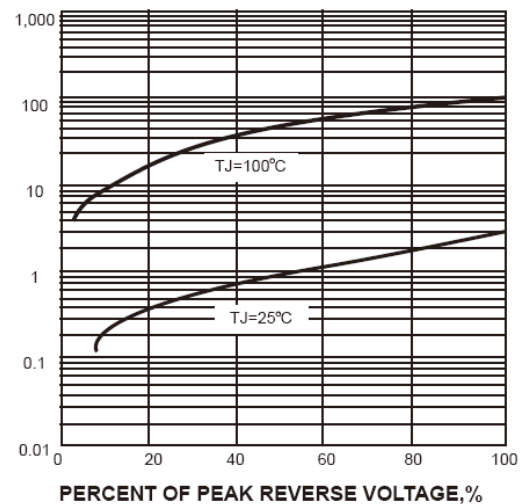


JUNCTION CAPACITANCE, pF

**FIG. 5-TYPICAL JUNCTION CAPACITANCE**

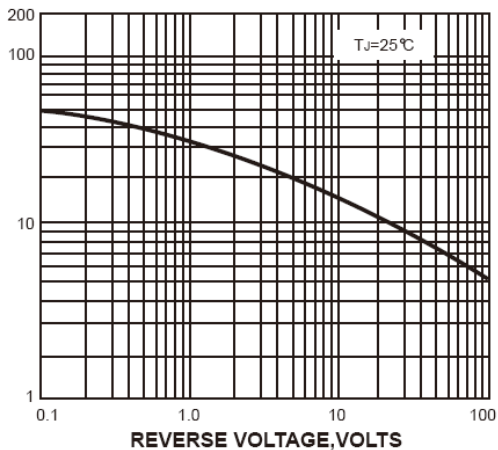

TRANSIENT THERMAL IMPEDANCE, °C/W

**FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

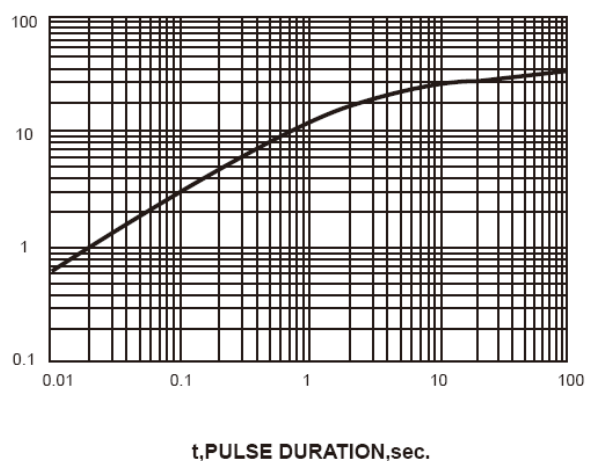



# US2A THRU US2M

*2.0 Amps. Surface Mount Glass Passivated Ultra Fast Rectifiers*

---

## Ordering Information

---

| Part No.  | Package | Packing |
|-----------|---------|---------|
| US2A~US2M | SMB     | 3K/Reel |