

# DATA SHEET

## US2AA SERIES

### SURFACE MOUNT ULTRA FAST RECOVERY RECTIFIER


**VOLTAGE** 50~1000 Volts **CURRENT** 2.0 Ampere

#### FEATURES

- LOW PROFILE PACKAGE
- PLASTIC PACKAGE HAS UNDERWRITERS LABORATORY 94V-0
- IDEAL FOR SURFACE MOUNTED APPLICATION
- GLASS PASSIVATED CHIP JUNCTI
- BULIT-IN STRAIN RELIEF DESIGN
- ULTRA FAST RECOVERY TIME FOR HIGH EFFICIENT
- HIGH TEMPERTURE SOLDERING : 260°C/10 SECONDS AT TERMINAL

#### MECHANICAL DATA

- CASE : MOLDED PLASTIC
- TERMINAL : SOLDER PLATED
- POLARITY : INDICATED BY CATHODE BAND
- WEIGHT : 0.064 GRAMS

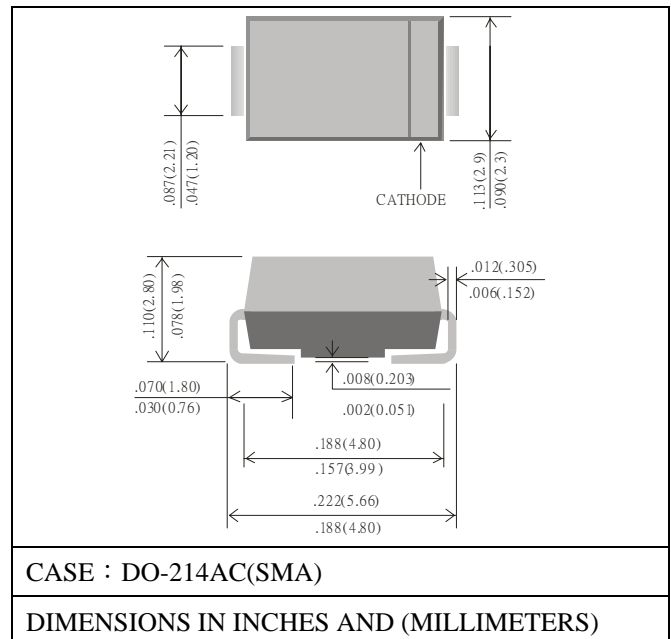

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

##### RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED.

PARAMETER	SYMBOL	US2AA	US2BA	US2DA	US2GA	US2JA	US2KA	US2MA	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	$V_{RRM}$	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	$V_{RMS}$	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	$V_{DC}$	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375" (9.5mm) LEAD LENGTH AT $T_A=90^\circ\text{C}$	$I_O$	2.0							A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	$I_{FSM}$	50							A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JL}$	20							$^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	$T_{STG}$	-55 TO + 150							$^\circ\text{C}$
OPERATING TEMPERATURE RANGE	$T_J$	-55 TO + 150							$^\circ\text{C}$

##### ELECTRICAL CHARACTERISTICS ( $A_T T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

PARAMETER	SYMBOL	US2AA	US2BA	US2DA	US2GA	US2JA	US2KA	US2MA	UNITS
MAXIMUM FORWARD VOLTAGE AT 2A	$V_F$	1.0			1.3	1.7			V
MAXIMUM DC REVERSE CURRENT	25°C	$I_R$			5			$\mu\text{A}$	
	100°C				100				
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	$C_J$				28			pF	
MAXIMUM REVERSE RECOVERY TIME(NOTE 3)	$T_{RR}$	50			75			nS	

- NOTE: 1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS  
 2. THERMAL RESISTANCE FROM JUNCTION TO AMBIENT AND JUNCTION TO LEAD P.C.B. MOUNTED ON 0.3x0.3"(8.0x8.0mm) COPPER PAD AREAS  
 3. REVERSE RECOVERY TEST CONDITIONS:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$

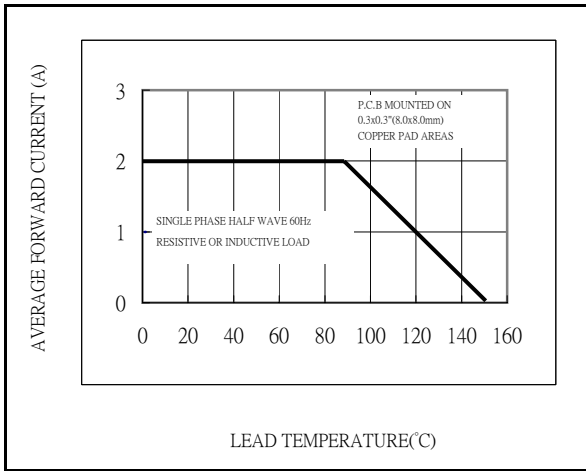


Fig.1-TYPICAL FORWARD CURRENT DERATING CURVE

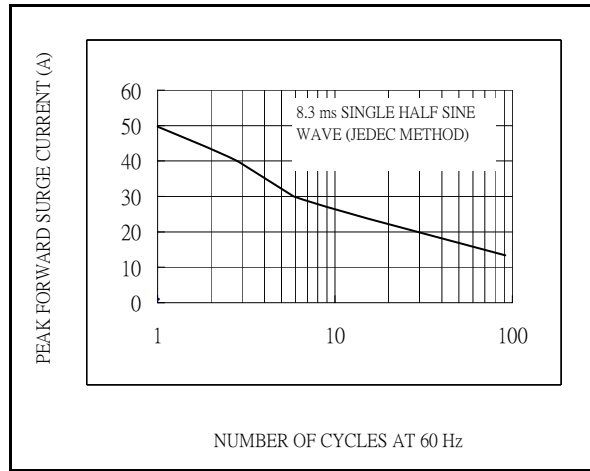


Fig.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

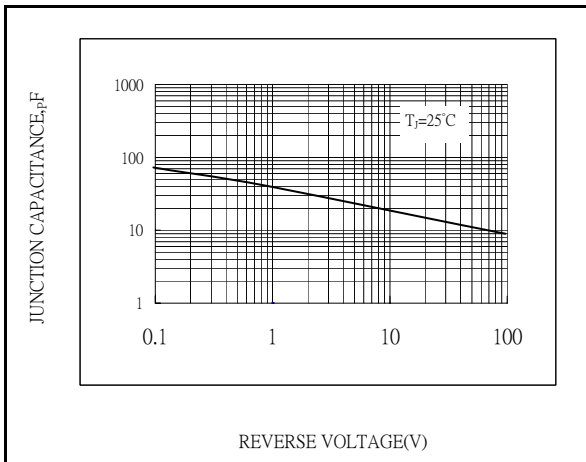


Fig.3-TYPICAL JUNCTION CAPACITANCE

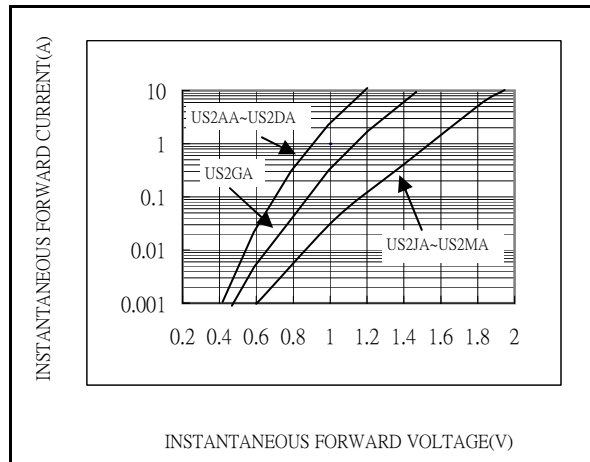


Fig.4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

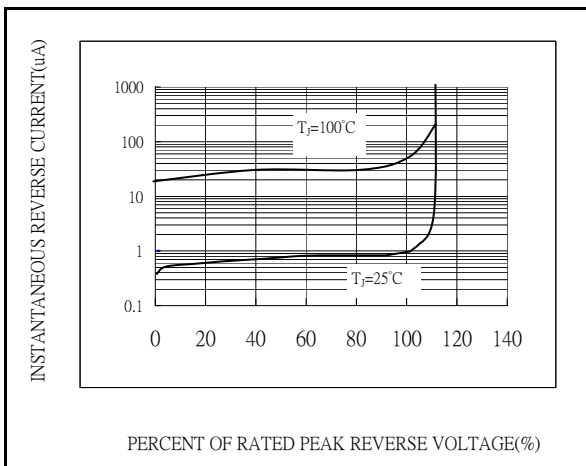


Fig.5-TYPICAL REVERSE CHARACTERISTICS