

**US5C3257**


Preliminary

CMOS IC**QUAD 2:1 MUX/DEMUX BUS SWITCH****DESCRIPTION**

The UTC **US5C3257** is a QUAD 2:1 multiplexer/demultiplexer with low on-resistance and is pinout and function compatible with the TTL device. Inputs can be connected to outputs with low on resistance (5Ω) with no additional ground bounce noise or propagation delay.

FEATURES

- * 5Ω switches connect inputs to outputs
- * ESD protection on pin
- * Near zero propagation delay
- * Ultra Low Quiescent Power (0.2μA Typical)
 - Ideally suited for notebook applications
- * Direct bus connection when switches are ON
- * Pin compatible with U74 series logic devices



SOP-16


ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
US5C3257L-S16-R	US5C3257G-S16-R	SOP-16	Tape Reel
US5C3257L-S16-T	US5C3257G-S16-T	SOP-16	Tube

Note: xx: Output Voltage, refer to Marking Information.

US5C3257L-S16-R	(1)Packing Type	(1) R: Tape Reel, T: Tube
	(2)Package Type	(2) S16: SOP-16
	(3)Halogen Free	(3) L: Lead Free, G: Halogen Free


■ PIN CONFIGURATION

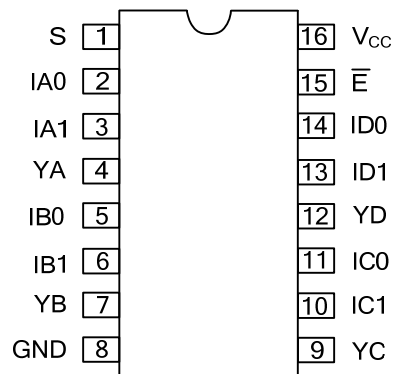

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	S	Select Inputs
2, 3, 5, 6, 10, 11,13,14,	IAn-IDn	Data Inputs
4, 7, 9, 12	YA-YD	Data Outputs
8	GND	Ground
15	$\bar{E}$	Enable
16	V _{CC}	Power

■ BLOCK DIAGRAM

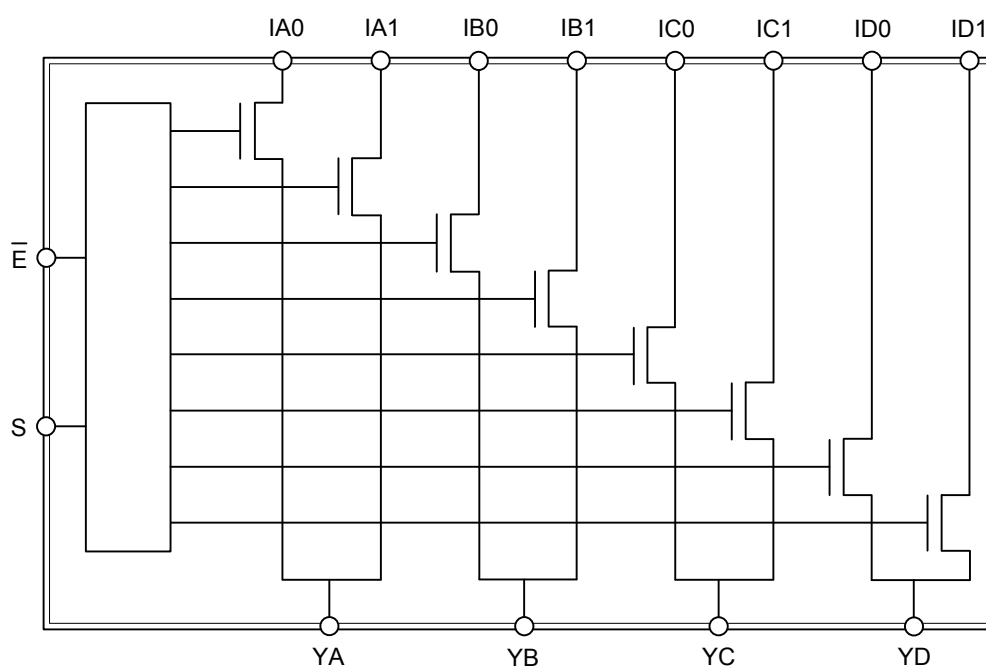

■ TRUTH TABLE

$\bar{E}$	S	YA	YB	YC	YD	Function
H	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Disable
L	L	IA0	IB0	IC0	ID0	S=0
L	H	IA1	IB1	IC1	ID1	S=1

Note: H=High Voltage Level, L=Low Voltage Level

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage to Ground Potential (Inputs & V_{CC} Only)		-0.5~+7.0	V
Supply Voltage to Ground Potential (Outputs & D/O Only)		-0.5~+7.0	V
DC Input Voltage		-0.5~+7.0	V
DC Output Current		120	mA
Power Dissipation	P_D	0.5	W
Storage Temperature	T_{STG}	-55~+150	°C
Ambient Temperature with Power Applied	T_{OPR}	-40~+85	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ DC ELECTRICAL CHARACTERISTICS

(Typical application at $V_{CC}=5\text{ V}$, $T_A=25^\circ\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS (Note 1)	MIN	TYP (Note 1)	MAX	UNIT
Input HIGH Voltage	V_{IH}	Guaranteed Logic HIGH Level	2.0			V
Input LOW Voltage	V_{IL}	Guaranteed Logic LOW Level	-0.5		0.8	V
Input HIGH Current	I_{IH}	$V_{CC}=\text{Max.}$, $V_{IN}=V_{CC}$			± 1	μA
Input LOW Current	I_{IL}	$V_{CC}=\text{Max.}$, $V_{IN}=\text{GND}$			± 1	μA
High Impedance Output Current	I_{OZH}	$0 \leq I$, $Y \leq V_{CC}$			± 1	μA
Clamp Diode Voltage	V_{IK}	$V_{CC}=\text{Min.}$, $I_{IN}=-18\text{mA}$		-0.7	-1.2	V
Short Circuit Current (Note 2)	I_{OS}	$I(Y)=0\text{V}$, $Y(I)=V_{CC}$	100			mA
Input Hysteresis at Control Pins	V_H			150		mV
Switch On Resistance (Note 3)	R_{ON}	$V_{CC}=\text{Min.}$, $V_{IN}=0.0\text{V}$, $I_{ON}=48\text{mA}$		5	7	Ω
		$V_{CC}=\text{Min.}$, $V_{IN}=2.4\text{V}$, $I_{ON}=15\text{mA}$		10	15	Ω

■ CAPACITANCE ($T_A=25^\circ\text{C}$, $f=1\text{MHz}$)

PARAMETER (Note 4)	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Capacitance	C_{IN}	$V_{IN}=0\text{V}$			6	pF
In/Yn Capacitance, Switch Off	C_{OFF}	$V_{IN}=0\text{V}$			6	pF
In/Yn Capacitance, Switch On	C_{ON}	$V_{IN}=0\text{V}$			14	pF

Notes: 1. Typical values are at $V_{CC}=5.0\text{V}$, $T_A=25^\circ\text{C}$ ambient and maximum loading.

2. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.

3. Measured by the voltage drop between I and Y pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (I, Y) pins.

4. This parameter is determined by device characterization but is not production tested.

■ POWER SUPPLY CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS (Note 1)	MIN	TYP (Note 2)	MAX	UNIT
Quiescent Power Supply Current	I_{CC}	$V_{CC}=\text{Max.}, V_{IN}=\text{GND or } V_{CC}$		0.1	3.0	μA
Supply Current per Input @ TTL HIGH	ΔI_{CC}	$V_{CC}=\text{Max.}, V_{IN}=3.4\text{V (Note 3)}$			2.5	mA
Supply Current per Input per MHz (Note 4)	I_{CCD}	$V_{CC}=\text{Max.}, I \text{ and } Y \text{ Pins Open}$ $\overline{BE}=\text{GND}, \text{Control Input Toggling}$ 50% Duty Cycle			0.25	mA/ MHz

Notes: 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.

2. Typical values are at $V_{CC}=5.0\text{V}$, $T_A=25^\circ\text{C}$ ambient and maximum loading.

3. Per TTL driven input ($V_{IN}=3.4\text{V}$, control inputs only); I and Y pins do not contribute to I_{CC} .

4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The I and Y inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

■ SWITCHING CHARACTERISTICS OVER OPERATION RANGE

PARAMETER	SYMBOL	TEST CONDITIONS (Note 1)	MIN	TYP	MAX	UNIT
Propagation Delay In to Yn (Note 2, 3)	t_{LY}	$C_L=50\text{pF}, R_L=500\Omega$			0.25	ns
Bus Select Time S_n to Y_n	t_{SY}		0.5		5.2	ns
Bus Disable Time $\overline{E}$ to Y_n	t_{PZH} / t_{PZL}		0.5		4.8	ns
Bus Disable Time $\overline{E}$ to Y_n	t_{PHZ} / t_{PLZ}		0.5		5.0	ns

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.