

# UT54ACS54/UT54ACTS54

## 4-Wide AND-OR-INVERT Gates

Datasheet

November 2010

www.aeroflex.com/logic



### FEATURES

- ❑ 1.2μ CMOS
  - Latchup immune
- ❑ High speed
- ❑ Low power consumption
- ❑ Single 5 volt supply
- ❑ Available QML Q or V processes
- ❑ Flexible package
  - 14-pin DIP
  - 14-lead flatpack
- ❑ UT54ACS54 - SMD 5962-96532
- ❑ UT54ACTS54 - SMD 5962-96533

### DESCRIPTION

The UT54ACS54 and the UT54ACTS54 are 4-wide AND-OR-INVERT gates. The devices perform the Boolean function:


$$Y = AB+CD+EF+GH$$

The devices are characterized over full military temperature range of -55°C to +125°C.

### FUNCTION TABLE

| INPUT |   |   |   |   |   |   |   | OUTPUT |
|-------|---|---|---|---|---|---|---|--------|
| A     | B | C | D | E | F | G | H | Y      |
| H     | H | X | X | X | X | X | X | L      |
| X     | X | H | H | X | X | X | X | L      |
| X     | X | X | X | H | H | X | X | L      |
| X     | X | X | X | X | X | H | H | L      |
| L     | X | L | X | L | X | L | X | H      |
| X     | L | X | L | X | L | X | L | H      |

### LOGIC SYMBOL

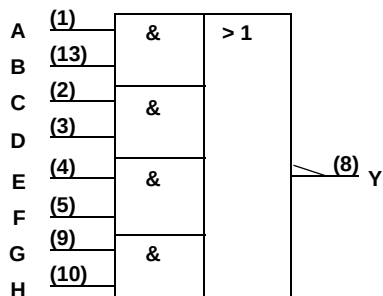


#### Note:


1. Logic symbol in accordance with ANSI/IEEE standard 91-1984 and IEC Publication 617-12.

### PINOUTS


#### 14-Pin DIP Top View



#### 14-Lead Flatpack Top View

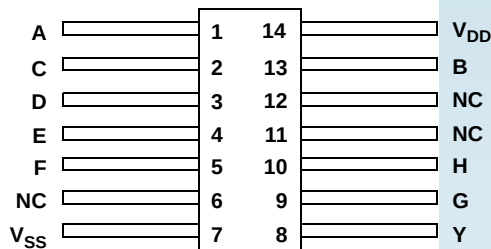

### LOGIC DIAGRAM

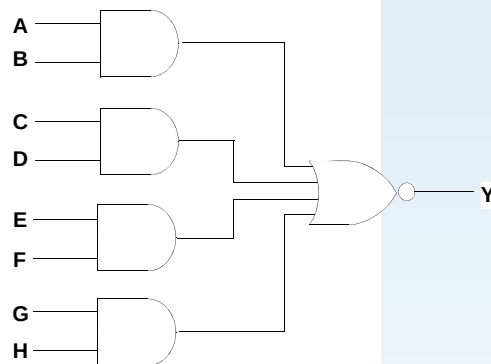

## OPERATIONAL ENVIRONMENT<sup>1</sup>

| PARAMETER                  | LIMIT  | UNITS                   |
|----------------------------|--------|-------------------------|
| Total Dose                 | 1.0E6  | rads(Si)                |
| SEU Threshold <sup>2</sup> | 80     | MeV-cm <sup>2</sup> /mg |
| SEL Threshold              | 120    | MeV-cm <sup>2</sup> /mg |
| Neutron Fluence            | 1.0E14 | n/cm <sup>2</sup>       |

**Notes:**

1. Logic will not latchup during radiation exposure within the limits defined in the table.
2. Device storage elements are immune to SEU affects.

## ABSOLUTE MAXIMUM RATINGS

| SYMBOL           | PARAMETER                              | LIMIT                      | UNITS |
|------------------|----------------------------------------|----------------------------|-------|
| V <sub>DD</sub>  | Supply voltage                         | -0.3 to 7.0                | V     |
| V <sub>I/O</sub> | Voltage any pin                        | -.3 to V <sub>DD</sub> +.3 | V     |
| T <sub>STG</sub> | Storage Temperature range              | -65 to +150                | °C    |
| T <sub>J</sub>   | Maximum junction temperature           | +175                       | °C    |
| T <sub>LS</sub>  | Lead temperature (soldering 5 seconds) | +300                       | °C    |
| Θ <sub>JC</sub>  | Thermal resistance junction to case    | 15.5                       | °C/W  |
| I <sub>I</sub>   | DC input current                       | ±10                        | mA    |
| P <sub>D</sub>   | Maximum power dissipation              | 3.2                        | W     |

**Note:**

1. Stresses outside the listed absolute maximum ratings may cause permanent damage to the device. This is a stress rating only, functional operation of the device at these or any other conditions beyond limits indicated in the operational sections is not recommended. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
2.  $P_D = T_S - T_C / \Theta_{JC}$ .

## RECOMMENDED OPERATING CONDITIONS

| SYMBOL          | PARAMETER             | LIMIT                | UNITS |
|-----------------|-----------------------|----------------------|-------|
| V <sub>DD</sub> | Supply voltage        | 4.5 to 5.5           | V     |
| V <sub>IN</sub> | Input voltage any pin | 0 to V <sub>DD</sub> | V     |
| T <sub>C</sub>  | Temperature range     | -55 to + 125         | °C    |

**DC ELECTRICAL CHARACTERISTICS <sup>7</sup>**(V<sub>DD</sub> = 5.0V ±10%; V<sub>SS</sub> = 0V <sup>6</sup>, -55°C < T<sub>C</sub> < +125°C); Unless otherwise noted, T<sub>c</sub> is per the temperature range ordered.

| SYMBOL             | PARAMETER                                               | CONDITION                                                                                                                                                                  | MIN                                         | MAX                      | UNIT       |
|--------------------|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|--------------------------|------------|
| V <sub>IL</sub>    | Low-level input voltage <sup>1</sup><br>ACTS<br>ACS     |                                                                                                                                                                            |                                             | 0.8<br>.3V <sub>DD</sub> | V          |
| V <sub>IH</sub>    | High-level input voltage <sup>1</sup><br>ACTS<br>ACS    |                                                                                                                                                                            | .5V <sub>DD</sub><br>.7V <sub>DD</sub>      |                          | V          |
| I <sub>IN</sub>    | Input leakage current<br>ACTS/ACS                       | V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub>                                                                                                                       | -1                                          | 1                        | μA         |
| V <sub>OL</sub>    | Low-level output voltage <sup>3</sup><br>ACTS<br>ACS    | I <sub>OL</sub> = 8.0mA<br>I <sub>OL</sub> = 100μA                                                                                                                         |                                             | 0.40<br>0.25             | V          |
| V <sub>OH</sub>    | High-level output voltage <sup>3</sup><br>ACTS<br>ACS   | I <sub>OH</sub> = -8.0mA<br>I <sub>OH</sub> = -100μA                                                                                                                       | .7V <sub>DD</sub><br>V <sub>DD</sub> - 0.25 |                          | V          |
| I <sub>OS</sub>    | Short-circuit output current <sup>2,4</sup><br>ACTS/ACS | V <sub>O</sub> = V <sub>DD</sub> and V <sub>SS</sub>                                                                                                                       | -200                                        | 200                      | mA         |
| P <sub>total</sub> | Power dissipation <sup>2, 8, 9</sup>                    | C <sub>L</sub> = 50pF                                                                                                                                                      |                                             | 2.0                      | mW/<br>MHz |
| I <sub>OL</sub>    | Output current <sup>10</sup><br>(Sink)                  | V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub><br>V <sub>OL</sub> = 0.4V                                                                                             | 8                                           |                          | mA         |
| I <sub>OH</sub>    | Output current <sup>10</sup><br>(Source)                | V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub><br>V <sub>OH</sub> = V <sub>DD</sub> - 0.4V                                                                           | -8                                          |                          | mA         |
| I <sub>DDQ</sub>   | Quiescent Supply Current                                | V <sub>DD</sub> = 5.5V                                                                                                                                                     |                                             | 10                       | μA         |
| ΔI <sub>DDQ</sub>  | Quiescent Supply Current Delta<br>ACTS                  | For input under test<br>V <sub>IN</sub> = V <sub>DD</sub> - 2.1V<br>For all other inputs<br>V <sub>IN</sub> = V <sub>DD</sub> or V <sub>SS</sub><br>V <sub>DD</sub> = 5.5V |                                             | 1.6                      | mA         |
| C <sub>IN</sub>    | Input capacitance <sup>5</sup>                          | f = 1MHz @ 0V                                                                                                                                                              |                                             | 15                       | pF         |
| C <sub>OUT</sub>   | Output capacitance <sup>5</sup>                         | f = 1MHz @ 0V                                                                                                                                                              |                                             | 15                       | pF         |

**Notes:**

1. Functional tests are conducted in accordance with MIL-STD-883 with the following input test conditions:  $V_{IH} = V_{IH(min)} + 20\%$ ,  $- 0\%$ ;  $V_{IL} = V_{IL(max)} + 0\%$ ,  $- 50\%$ , as specified herein, for TTL, CMOS, or Schmitt compatible inputs. Devices may be tested using any input voltage within the above specified range, but are guaranteed to  $V_{IH(min)}$  and  $V_{IL(max)}$ .
2. Supplied as a design limit but not guaranteed or tested.
3. Per MIL-PRF-38535, for current density  $\leq 5.0E5$  amps/cm<sup>2</sup>, the maximum product of load capacitance (per output buffer) times frequency should not exceed 3,765 pF/MHz.
4. Not more than one output may be shorted at a time for maximum duration of one second.
5. Capacitance measured for initial qualification and when design changes may affect the value. Capacitance is measured between the designated terminal and  $V_{SS}$  at frequency of 1MHz and a signal amplitude of 50mV rms maximum.
6. Maximum allowable relative shift equals 50mV.
7. All specifications valid for radiation dose  $\leq 1E6$  rads(Si).
8. Power does not include power contribution of any TTL output sink current.
9. Power dissipation specified per switching output
10. This value is guaranteed based on characterization data, but not tested.

## AC ELECTRICAL CHARACTERISTICS <sup>2</sup>

( $V_{DD} = 5.0V \pm 10\%$ ;  $V_{SS} = 0V$  <sup>1</sup>,  $-55^{\circ}C < T_C < +125^{\circ}C$ ); Unless otherwise noted,  $T_C$  is per the temperature range ordered.


| SYMBOL    | PARAMETER                  | MINIMUM | MAXIMUM | UNIT |
|-----------|----------------------------|---------|---------|------|
| $t_{PHL}$ | From any input to Y output | 1       | 16      | ns   |
| $t_{PLH}$ | From any input to Y output | 1       | 13      | ns   |

### Notes:

1. Maximum allowable relative shift equals 50mV.
2. All specifications valid for radiation dose  $\leq 1E6$  rads(Si).


PACKAGING

Side-Brazed Packages

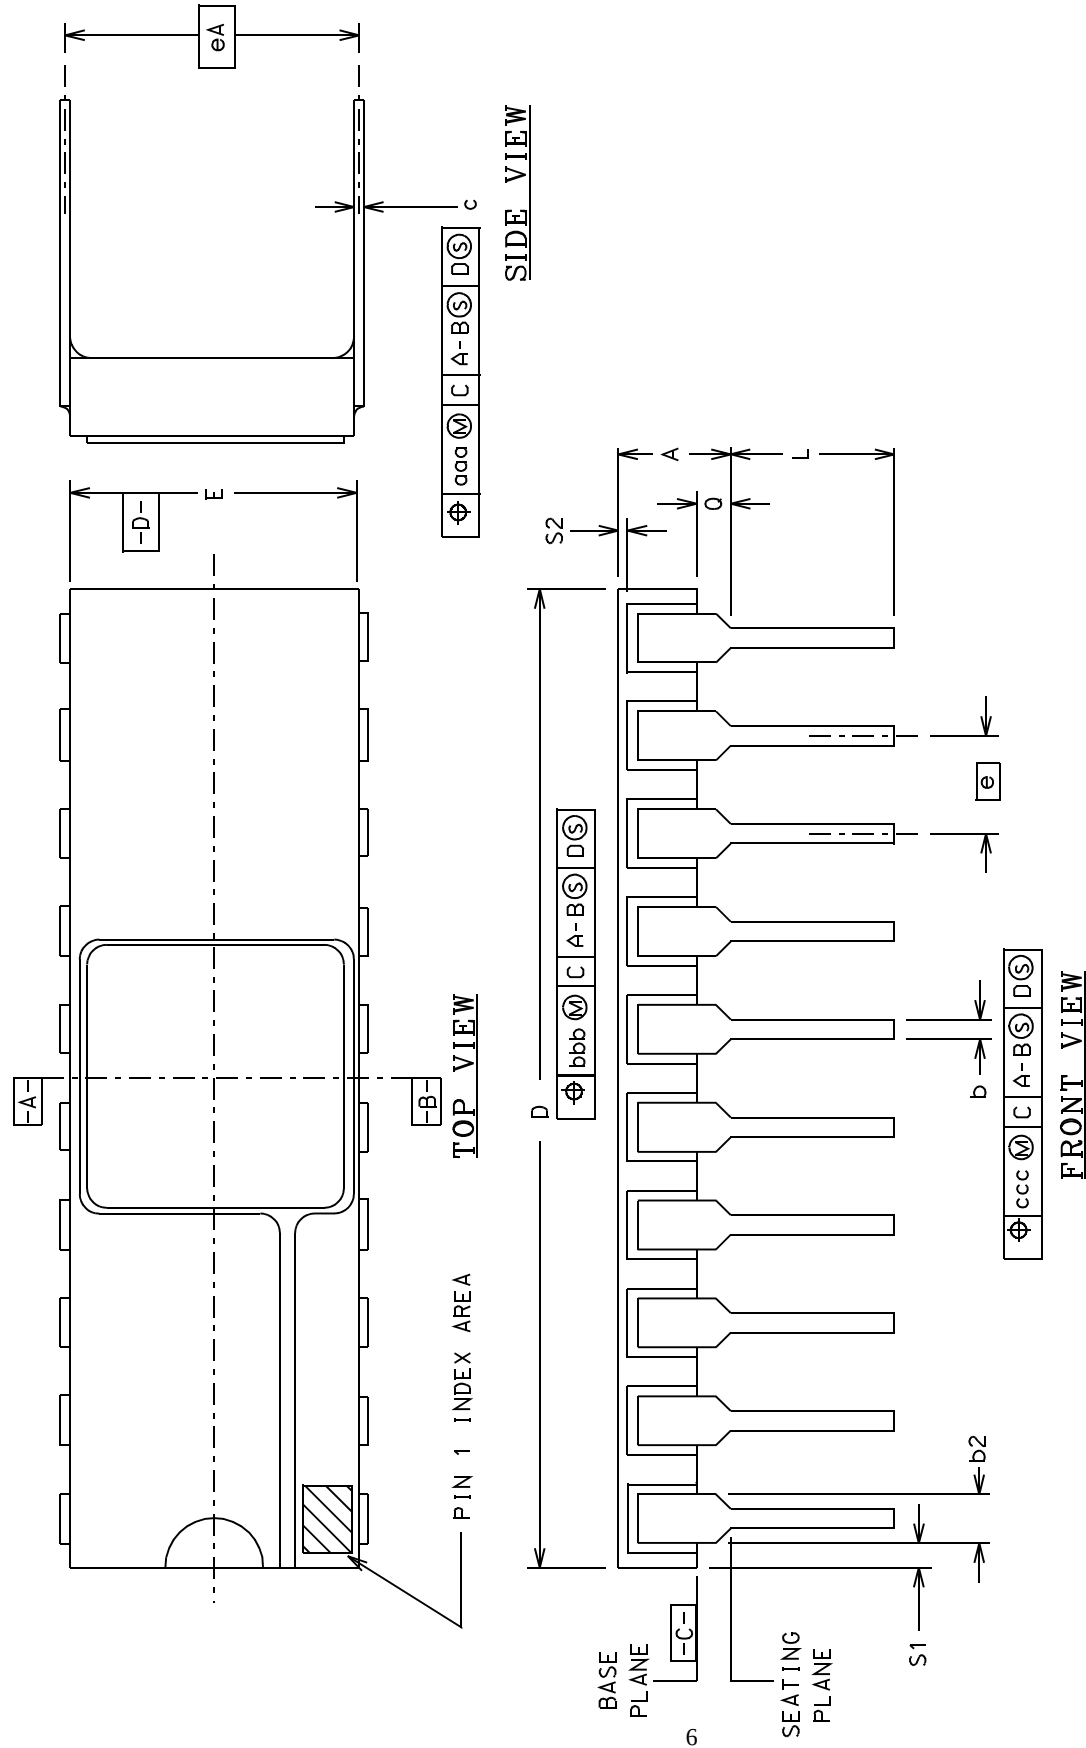


| PKG<br>CONF IG | LEAD<br>COUNT | MIL-STD-<br>1835 DWG<br>CONF C | DIMENSION SYMBOLS |                |                |                |                |                |              |              |                |                |                |                |                |                |                |
|----------------|---------------|--------------------------------|-------------------|----------------|----------------|----------------|----------------|----------------|--------------|--------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|                |               |                                | A                 | b              | b2             | c              | D              | E              | e            | eA           | L              | Q              | S1             | S2             | aaa            | bbb            | ccc            |
| -01            | 14            | D-1                            | 0.200<br>-----    | 0.026<br>0.014 | 0.065<br>0.045 | 0.018<br>0.008 | 0.785<br>----- | 0.310<br>0.220 | 0.100<br>BSC | 0.300<br>BSC | 0.200<br>0.125 | 0.060<br>0.015 | 0.005<br>0.005 | -----<br>0.005 | 0.015<br>----- | 0.030<br>----- | 0.010<br>----- |
| -02            | 16            | D-2                            | 0.200<br>-----    | 0.026<br>0.014 | 0.065<br>0.045 | 0.018<br>0.008 | 0.840<br>----- | 0.310<br>0.220 | 0.100<br>BSC | 0.300<br>BSC | 0.200<br>0.125 | 0.060<br>0.015 | 0.005<br>0.005 | -----<br>0.005 | 0.015<br>----- | 0.030<br>----- | 0.010<br>----- |
| -03            | 20            | D-8                            | 0.200<br>-----    | 0.026<br>0.014 | 0.065<br>0.045 | 0.018<br>0.008 | 1.060<br>----- | 0.310<br>0.220 | 0.100<br>BSC | 0.300<br>BSC | 0.200<br>0.125 | 0.070<br>0.015 | 0.005<br>0.005 | -----<br>0.005 | 0.015<br>----- | 0.030<br>----- | 0.010<br>----- |

## PIN #1 ID MARK



| PKG<br>CONFIG | LEAD<br>COUNT | MIL-STD<br>1835 DWG<br>CONF B | DIMENSION SYMBOLS |                |                |                |                |                |                |              |                |                |                |                |    |
|---------------|---------------|-------------------------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|--------------|----------------|----------------|----------------|----------------|----|
|               |               |                               | A                 | b              | c              | D              | E              | E1             | E2             | E3           | e              | k              | L              | Q              | S1 |
| -03           | 14            | F-2A                          | 0.115<br>0.045    | 0.022<br>0.015 | 0.009<br>0.004 | 0.390<br>----- | 0.260<br>0.235 | 0.290<br>----- | -----<br>0.130 | -----<br>BSC | 0.015<br>0.008 | 0.370<br>0.270 | 0.045<br>0.026 | -----<br>0.005 |    |
| -04           | 16            | F-5A                          | 0.115<br>0.045    | 0.022<br>0.015 | 0.009<br>0.004 | 0.440<br>----- | 0.285<br>0.245 | 0.315<br>----- | -----<br>0.130 | 0.050<br>BSC | 0.015<br>0.008 | 0.370<br>0.250 | 0.045<br>0.026 | -----<br>0.005 |    |
| -05           | 20            | F-9A                          | 0.115<br>0.045    | 0.022<br>0.015 | 0.009<br>0.004 | 0.540<br>----- | 0.300<br>0.245 | 0.330<br>----- | -----<br>0.130 | 0.050<br>BSC | 0.015<br>0.008 | 0.370<br>0.250 | 0.045<br>0.026 | -----<br>0.000 |    |

UT54ACS54/UT54ACTS54: SMD

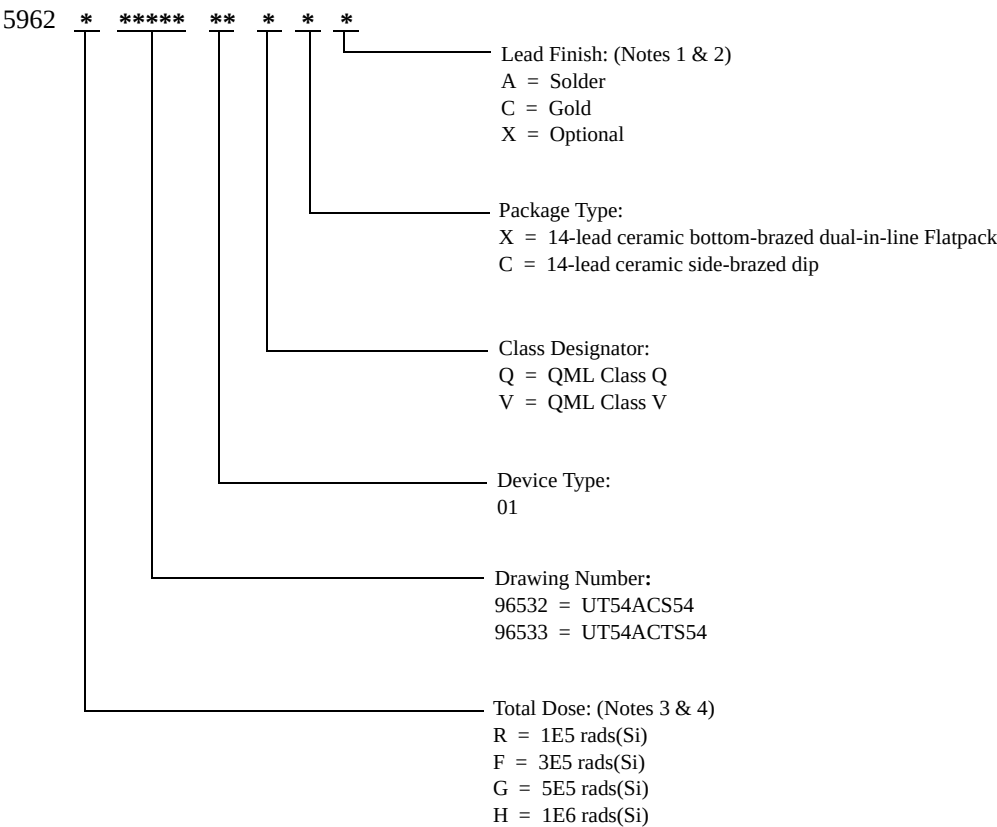

- Notes:**
- 1. Lead finish (A,C, or X) must be specified.
  - 2. If an “X” is specified when ordering, part marking will match the lead finish and will be either “A” (solder) or “C” (gold).
  - 3. Total dose radiation must be specified when ordering. QML Q and QML V not available without radiation hardening. For prototype inquiries, contact factory.
  - 4. Device type 02 is only offered with a TID tolerance guarantee of 3E5 rads(Si) or 1E6 rads(Si) and is tested in accordance with MIL-STD-883 Test Method 1019 Condition A and section 3.11.2. Device type 03 is only offered with a TID tolerance guarantee of 1E5 rads(Si), 3E5 rads(Si), and 5E5 rads(Si), and is tested in accordance with MIL-STD-883 Test Method 1019 Condition A.



## ***Aeroflex Colorado Springs - Datasheet Definition***

**Advanced Datasheet - Product In Development**

**Preliminary Datasheet - Shipping Prototype**

**Datasheet - Shipping QML & Reduced Hi-Rel**

### **COLORADO**

Toll Free: 800-645-8862  
Fax: 719-594-8468

### **INTERNATIONAL**

Tel: 805-778-9229  
Fax: 805-778-1980

### **NORTHEAST**

Tel: 603-888-3975  
Fax: 603-888-4585

### **SE AND MID-ATLANTIC**

Tel: 321-951-4164  
Fax: 321-951-4254

### **WEST COAST**

Tel: 949-362-2260  
Fax: 949-362-2266

### **CENTRAL**

Tel: 719-594-8017  
Fax: 719-594-8468

***www.aeroflex.com      info-ams@aeroflex.com***

Aeroflex UTMIC Microelectronic Systems Inc. (Aeroflex) reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused