


Name : UTH20TXX



Electrical Specification@25°C Operating Temperature 0 to 70°C											
Part No.	Insertion loss	Return loss				CMRR		Cross talk		Isolation	Package
	(dB Max)	(dB Typical .)				(dB Min .)		(dB Min .)		Voltage	
	1-100MHz	MHz				MHz		MHz		(Vrms Min)	
UTH20C01	-1	1-30	40	50	60-80	0.1-60	60-100	0.1-60	60-100	1500	A
UTH20T02	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	B
UTH20T03	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T04	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T05	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T06	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	B
UTH20T07	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	B
UTH20T08	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	B
UTH20T09	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T10	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T11	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T12	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T13	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	A
UTH20T14	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	C
UTH20T15	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	C
UTH20T16	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	B
UTH20T17	-1	-18	-14.4	-13.1	-12	-42	-40	-40	-38	1500	B


Download Data

Dimension: mm(inch)+/-0.25(0.01)

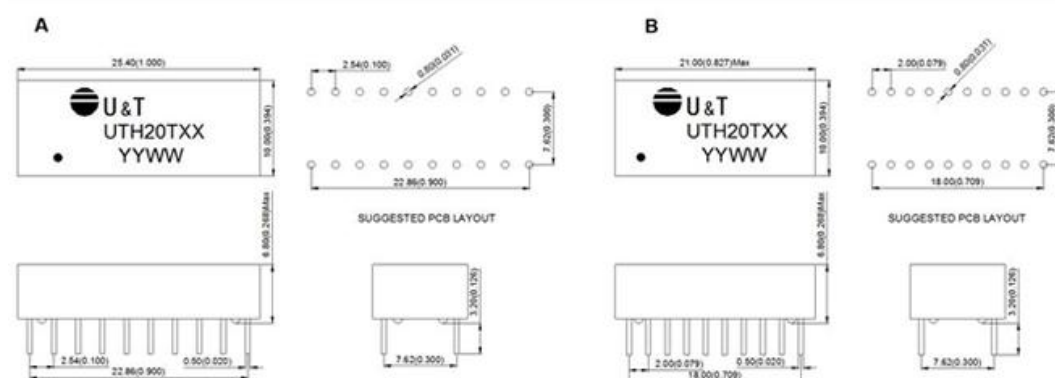


Dimension: mm(inch)+/-0.25(0.01)

C

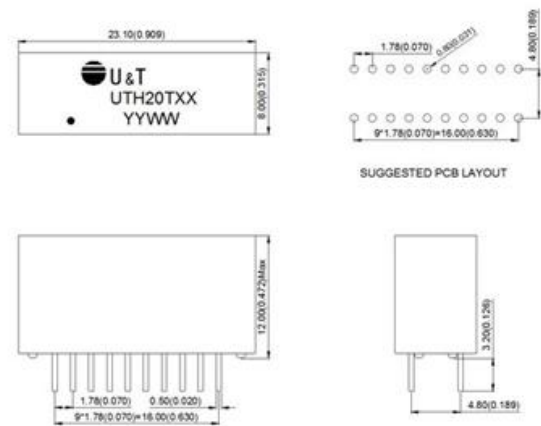




Schematic

UTH20C01,UTH20T02

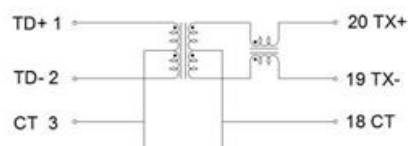


UTH20T05,UTH20T06

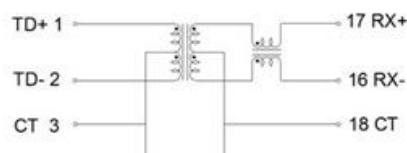

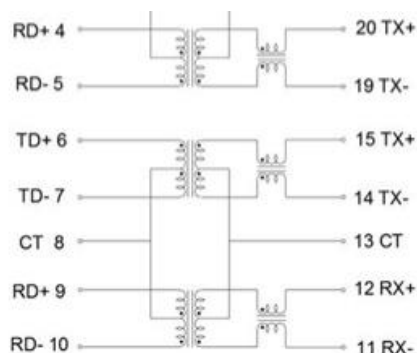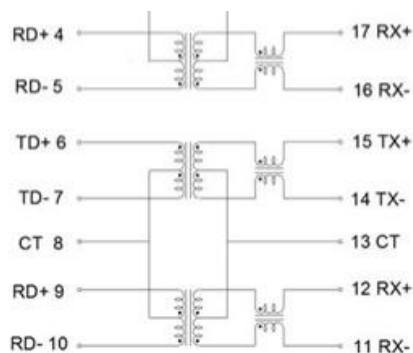


Schematic


UTH20T03,UTH20T07

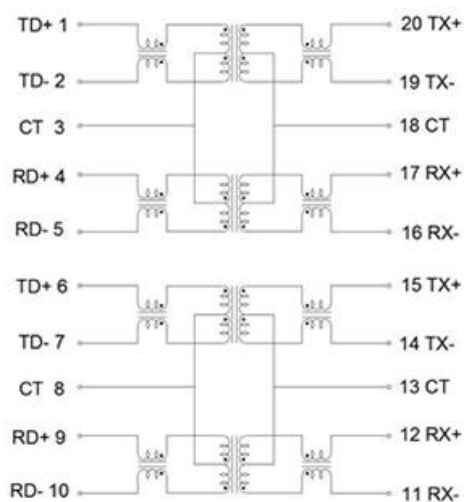


UTH20T04,UTH20T08,UTH20T14

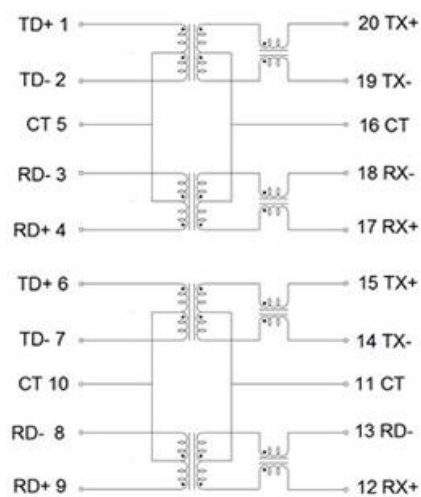

UTH20T10

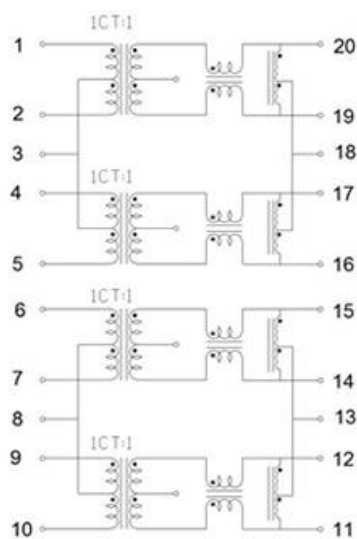


UTH20T11

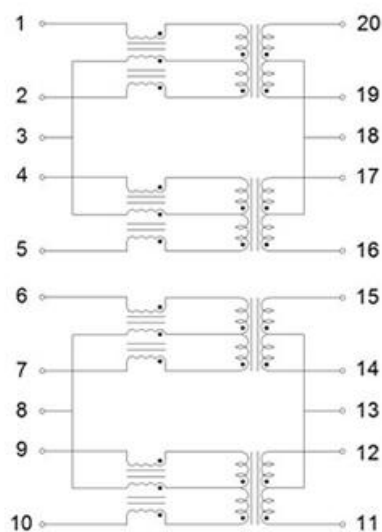


Schematic


UTH20T12.UTH20T16

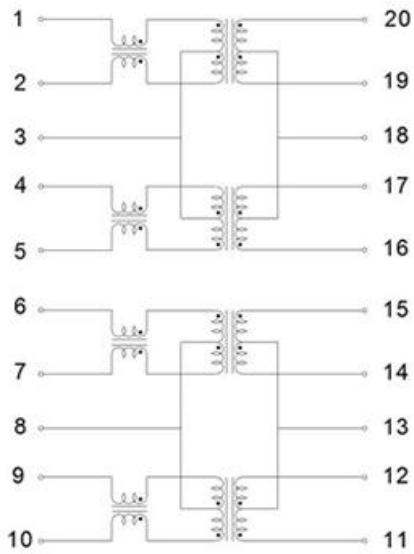


UTH20T13

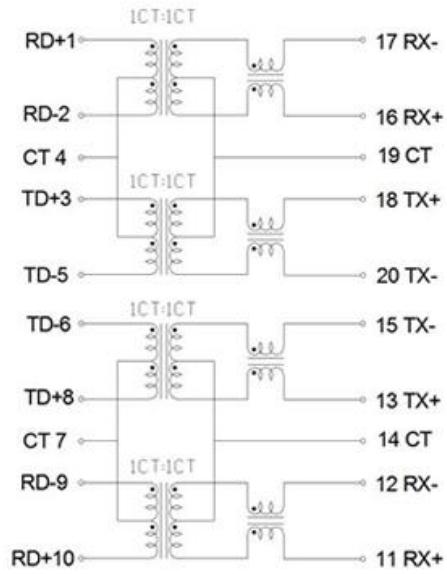

UTH20T15

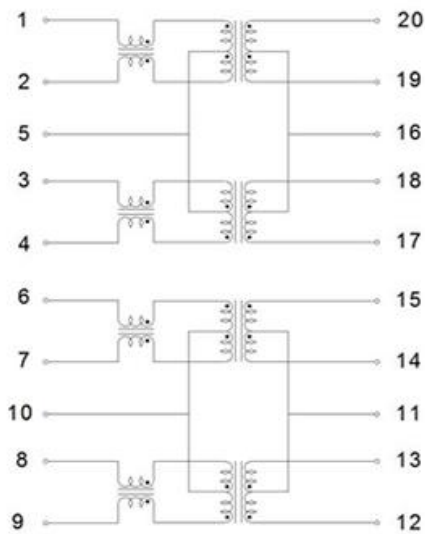

UTH20T09.UTH20T17

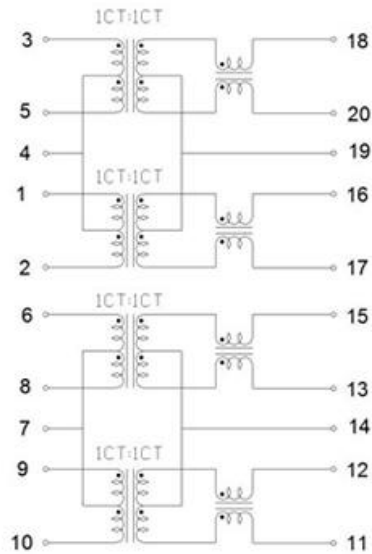

[【Back】](#) [【Print】](#) [【Top↑】](#)

Copyright © U&T Electronics Co., Ltd.

ADD: No.3 Industrial Zone, Jinshan Village, Chashan Town, Dongguan City, Guangdong province, P.R.C

TEL: 86-769-76171008 FAX: 86-769-76178808