



# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Features

- High efficiency
- Viewing Angle =  $\pm 15^\circ$
- Best thermal material solution of the world
- Thermal resistance (junction to Slug):  $15^\circ\text{C/W}$
- RoHS compliance


### Description

The UVC3535OUJLA-D0 is 0.2W UV LED housed in a miniature SMD package. The device has a peak wavelength of 265-280nm

### Applications

- Disinfection
- Phototherapy
- Bio-Analysis/Detection

### Package Outline

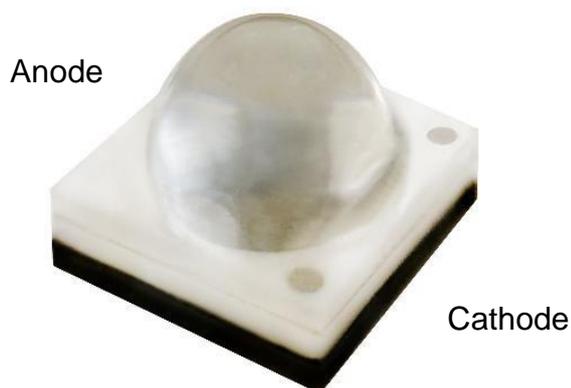

### Schematic





# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Absolute Maximum Rating at 25°C

<b>Symbol</b>	<b>Parameters</b>	<b>Ratings</b>	<b>Units</b>	<b>Notes</b>
I <sub>F</sub>	Continuous Forward Current	30	mA	
T <sub>opr</sub>	Operating Temperature	-40 ~ +60	°C	
T <sub>stg</sub>	Storage Temperature	-40 ~ +85	°C	
T <sub>sol</sub>	Soldering Temperature	260	°C	1
V <sub>R</sub>	Reverse Voltage	Not designed to be driven in reverse bias	V	
P <sub>D</sub>	Power Dissipation at(or below) 25°C Free Air Temperature	0.2	W	
ESD	Human Body Model	±4000	V	
R <sub>THJL</sub>	Junction to Slug Thermal Resistance	15	°C/W	



# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Electro-Optical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

#### Optical Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
Po	Total Radiated Power	$I_F=20\text{mA}$	2	3	-	mW	2
$\lambda_p$	Peak Wavelength	$I_F=20\text{mA}$	265	275	280	nm	3
$\Delta\lambda$	Spectral Bandwidth	$I_F=20\text{mA}$	-	12	-	nm	
$\theta_{1/2}$	Angle of Half Intensity	$I_F=20\text{mA}$	-	$\pm 15$	-	deg	

#### Electrical Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$V_F$	Forward Voltage	$I_F=20\text{mA}$	5.0	6.8	8.0	V	4

#### Notes:

1. Soldering time  $\leq 5$  seconds.
2. ProLight maintains a tolerance of  $\pm 10\%$  on flux and power measurements.
3. Wp Bin Rank :

Bin Code	Min	Max
A	265	270
B	270	275
C	275	280

ProLight maintains a tolerance of  $\pm 3\text{nm}$  for peak wavelength measurements.

4. VF Bin Rank :

Bin Code	Min	Max
A	5.0	5.5
B	5.5	6.0
C	6.0	6.5
D	6.5	7.0
E	7.0	7.5
F	7.5	8.0

ProLight maintains a tolerance of  $\pm 0.1\text{V}$  for Voltage measurements.



# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Typical Characteristic Curves

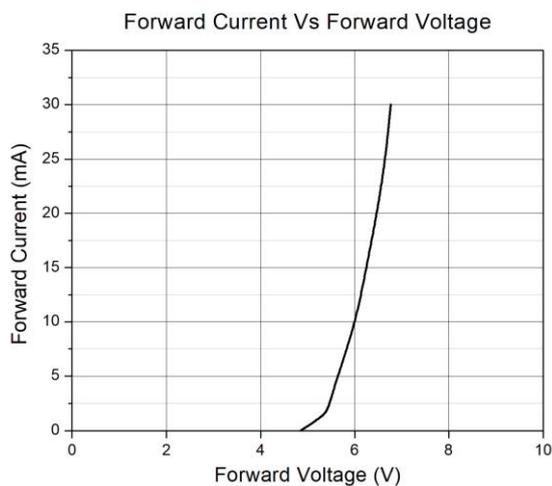


Figure 1

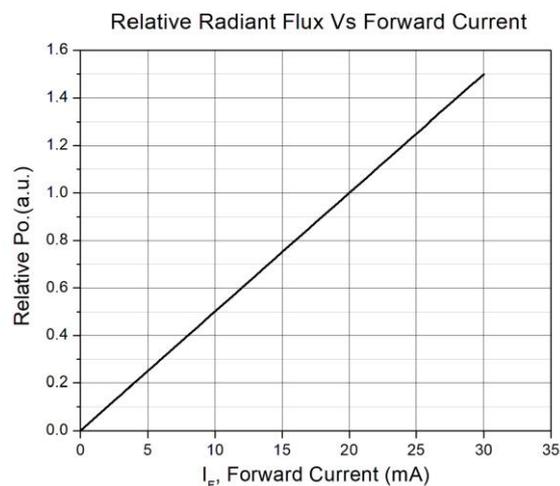


Figure 2

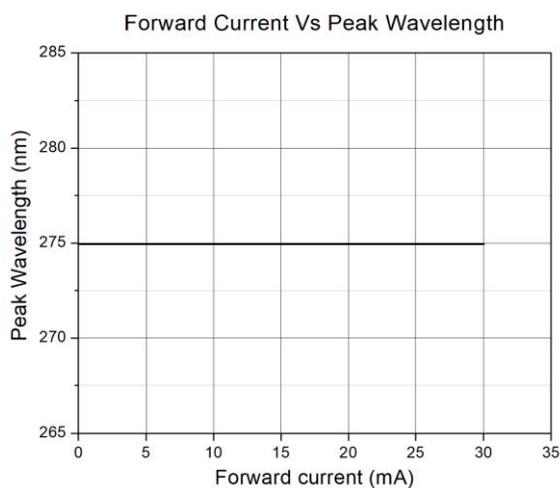


Figure 3

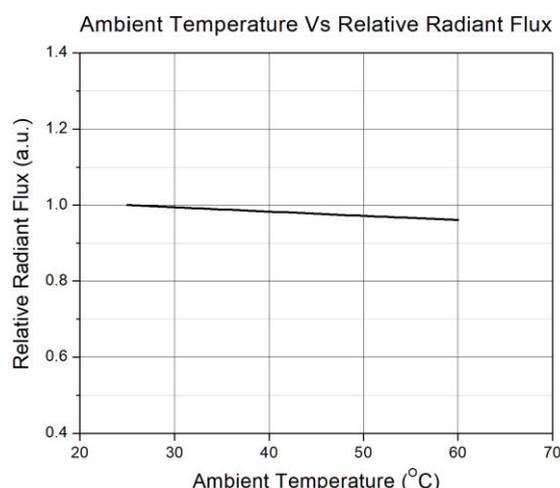


Figure 4

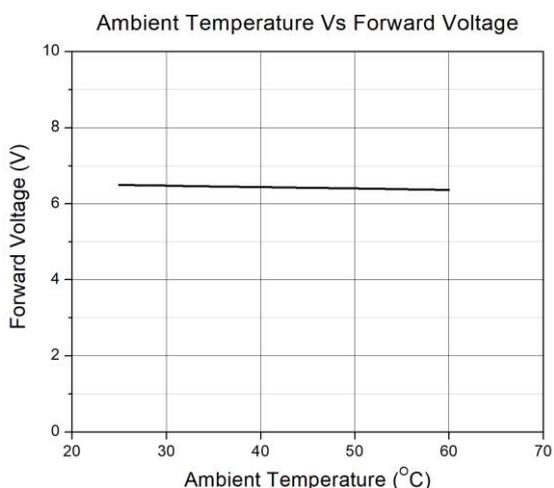


Figure 5

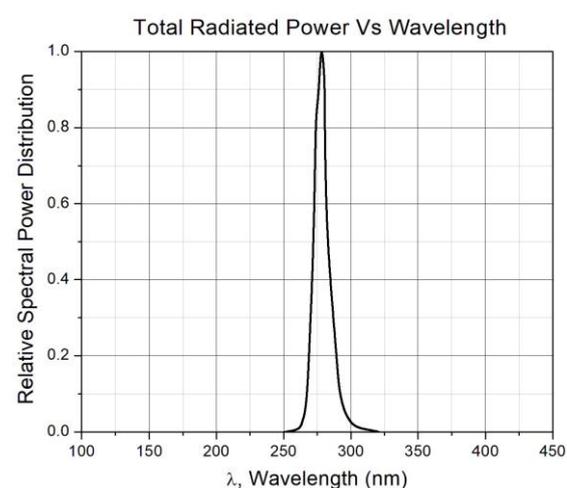





Figure 6



# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Typical Characteristic Curves

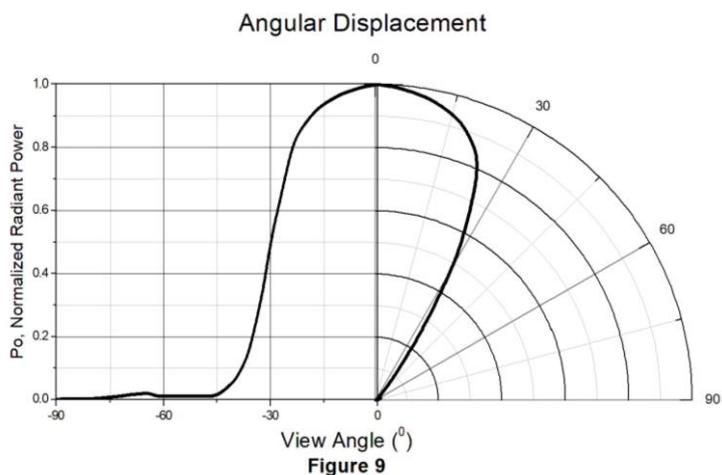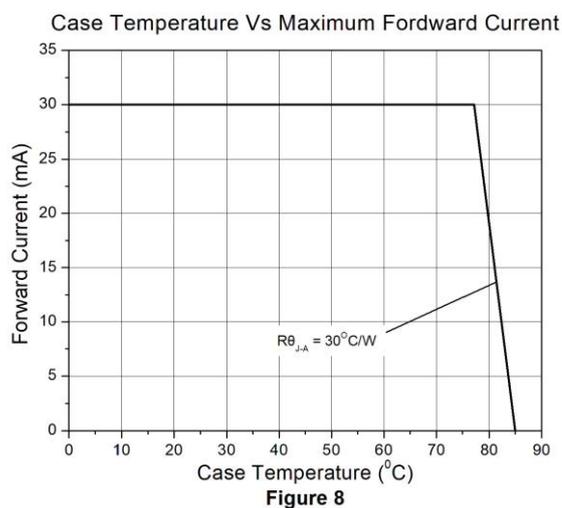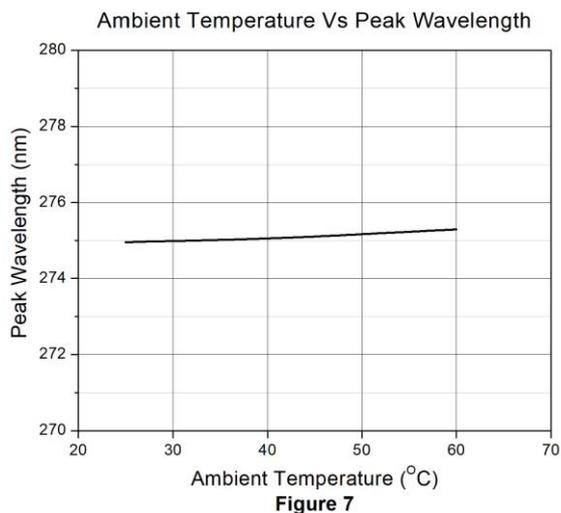




# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Package Dimension *All dimensions are in mm, unless otherwise stated*

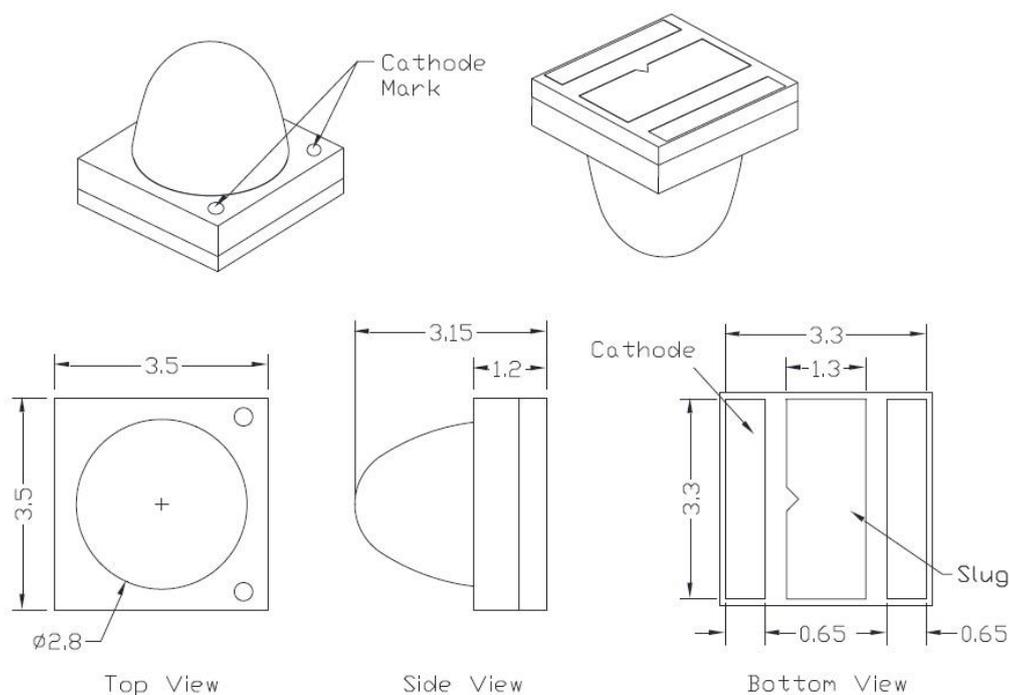

Circuit Diagram



### Notes:

1. The cathode side of the device is denoted by the chamfer on the part body.
2. Electrical insulation between the case and the board is required. Do not electrically connect either the anode or cathode to the slug.
3. Drawing not to scale.
4. All dimensions are in millimeters.
5. Unless otherwise indicated, tolerances are  $\pm 0.10\text{mm}$ .
6. Please do not solder the emitter by manual hand soldering, otherwise it will damage the emitter.
7. Please do not use a force of over 3kgf impact or pressure on the lens of the LED, otherwise it will cause a catastrophic failure.

\*The appearance and specifications of the product may be modified for improvement without notice




# UVC3535OUJLA-D0

## 0.2W UV Power LED


### Recommended Soldering Mask *All dimensions are in mm, unless otherwise stated*

#### Standard Emitter

#### TYPE A.

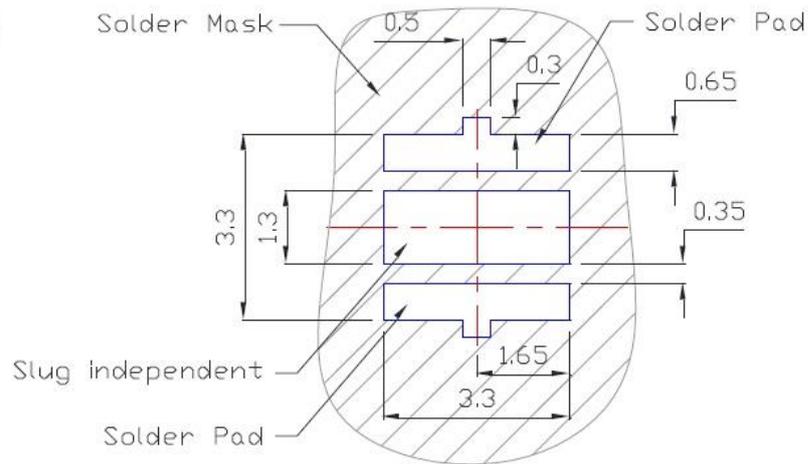

#### TYPE B.

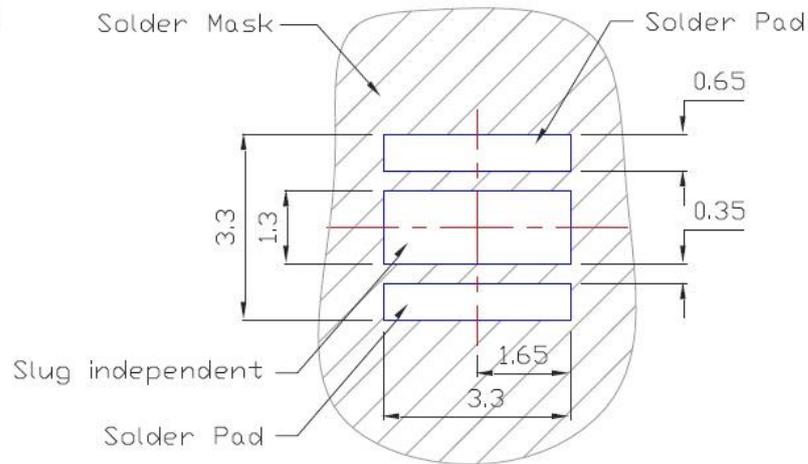

- All dimensions are in millimeters.
- Electrical isolation is required between Slug and Solder Pad.




# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Ordering Information

Part Number	Description	Quantity
UVC3535OUJLA-D0	Tape & Reel	500 pcs

### Reel Dimension *All dimensions are in mm, unless otherwise stated*

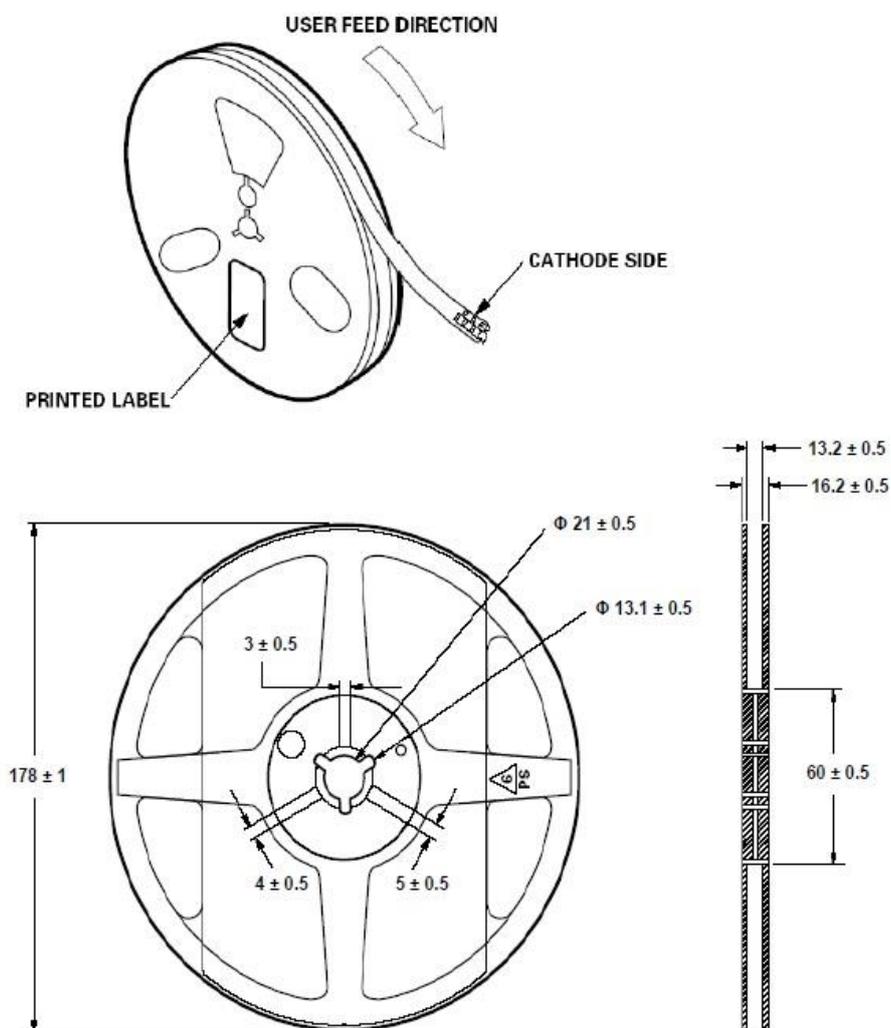

#### Notes:


1. Empty component pockets sealed with top cover tape.
2. Drawing not to scale.
3. All dimensions are in millimeters.



# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Tape Dimension *All dimensions are in mm, unless otherwise stated*

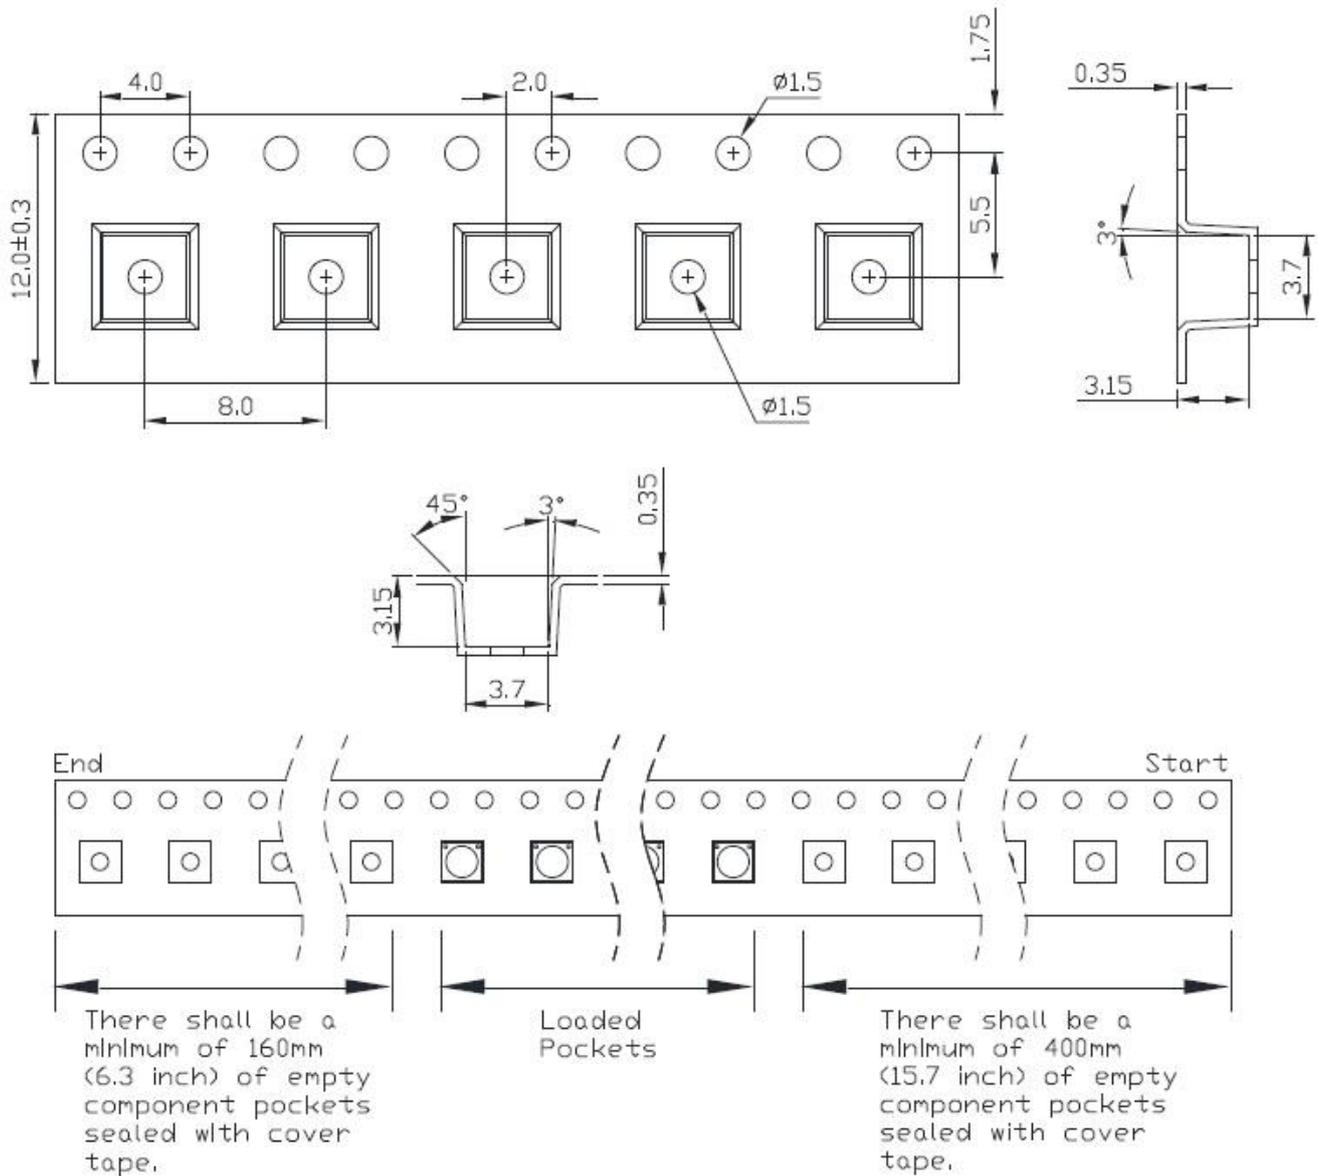

#### Notes:


1. Drawing not to scale.
2. All dimensions are in millimeters.
3. Unless otherwise indicated, tolerances are  $\pm 0.10$  mm.



# UVC3535OUJLA-D0

## 0.2W UV Power LED

### Label Form Specification

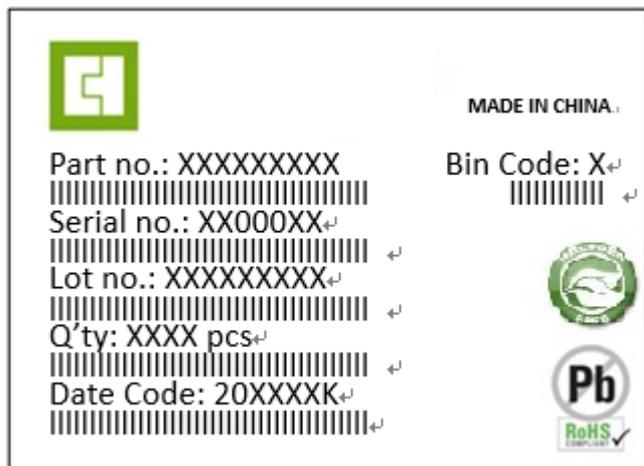

Part no: CTM Production Number  
Serial no: Production Number  
Lot no: Lot number  
Q'ty: Packing Quantity  
Date Code: Manufacture Date  
Bin Code: Po Ranks  
MADE IN CHINA: Production Place

### Precaution for Use

#### ● Storage

Please do not open the moisture barrier bag (MBB) more than one week. This may cause the leads of LED discoloration. We recommend storing ProLight's LEDs in a dry box after opening the MBB. The recommended storage conditions are temperature 5 to 30°C and humidity less than 40% RH. It is also recommended to return the LEDs to the MBB and to reseal the MBB.

● LEDs are ESD (electrostatic discharge) sensitive; static electricity and surge voltages seriously damage UV LEDs and can result in product failure.


- (1) Ensure that tools, jigs and machines being used are properly grounded
- (2) LED mounting equipment should include protection against voltage surge
- (3) Use proper ESD protection, including grounded wrist straps, ESD footwear and clothes

● We recommend using the M705-S101-S4 solder paste from SMIC (Senju Metal Industry Co., Ltd.) for lead-free soldering.

● Do not use solder pastes with post reflow flux residue > 47%. (58Bi-42Sn eutectic alloy, etc)  
This kind of solder pastes may cause a reliability problem to LED.



**Reflow Profile**

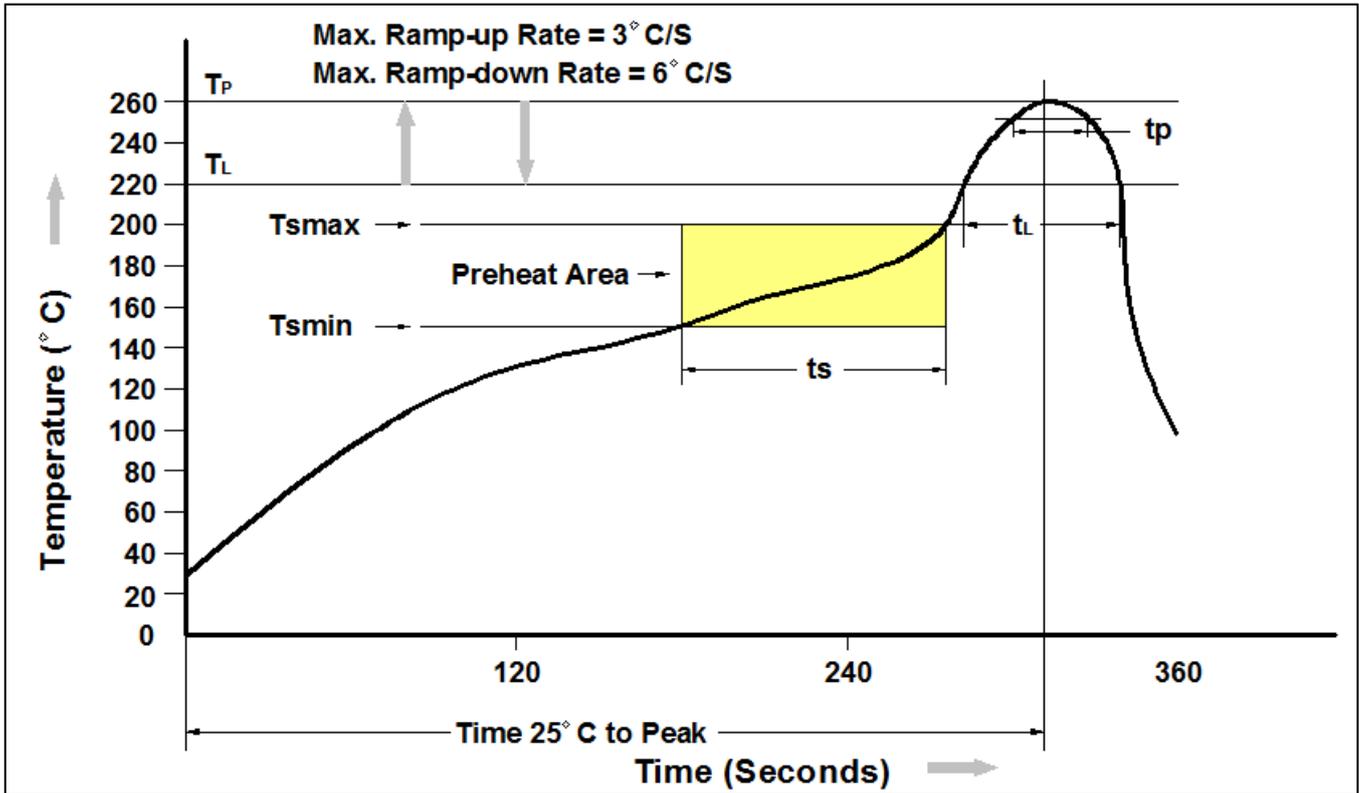

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T <sub>min</sub> )	150°C
Temperature Max. (T <sub>max</sub> )	200°C
Time (t <sub>s</sub> ) from (T <sub>min</sub> to T <sub>max</sub> )	60-120 seconds
Ramp-up Rate (t <sub>L</sub> to t <sub>P</sub> )	3°C/second max.
Liquidous Temperature (T <sub>L</sub> )	217°C
Time (t <sub>L</sub> ) Maintained Above (T <sub>L</sub> )	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t <sub>P</sub> ) within 5°C of 260°C	30 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



## UVC3535OUJLA-D0 0.2W UV Power LED

---

### DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

---

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*