

**2.3 inch ( 58.42mm )**

**5X8 DOT MATRIX LED DISPLAY UVP-2X58XX SERIES**

**DESCRIPTION**

The UVP-2058/2158/2458AA/2558AA is 2.3 inch (58.42mm) height 5X8 dot matrix display.

Single color display have the choices of three bright colors-AlGaAs red/green/red orange.

Multicolor display are applicable to two colors : green and red orange.

All device have gray face and white dot.

The AlGaAs red LED chip are made from AlGaAs on a non-transparent GaAs substrate.

The green LED chip are made from GaP on a transparent GaP substrate.

The Red orange LED chip are made from GaAsP on a transparent GaP substrate.

**FEATURES**

- Industuy standard size
- Wide viewing angle
- Continuous uniform dot matrix.
- Excellent characters appearance
- Low power requirement

**DEVICES**

PART NO.	DESCRIPTION	PACKAGE DIMENSION	INTERNAL CIRCUIT DIAGRAM
UVP-2058	Column Anode	Fig. 1	Fig. 2
UVP-2158	Column Cathode		

**ABSOLUTE MAXIMUM RATINGS**

@ T<sub>A</sub>=25°C

PARAMETER	AlGaAs RED	GREEN	RED ORANGE	UNIT
Power Dissipation Per Dot	36	36	36	mW
Peak Forward Current Per Dot	125	100	100	mA
Continuous Forward Current Per Dot	15	13	13	mA
Derating Linear From 25°C Per Dot	0.20	0.17	0.17	mA/°C
Reverse Voltage Per Dot	5	5	5	V
Operating Temperature Range	-35°Cto+85°C			
Storage Temperature Range	-35°Cto+85°C			
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260°C				




2.3 inch ( 58.42mm )

5X8 DOT MATRIX LED DISPLAY

UVP-2X58XX SERIES

PACKAGE DIMENSIONS

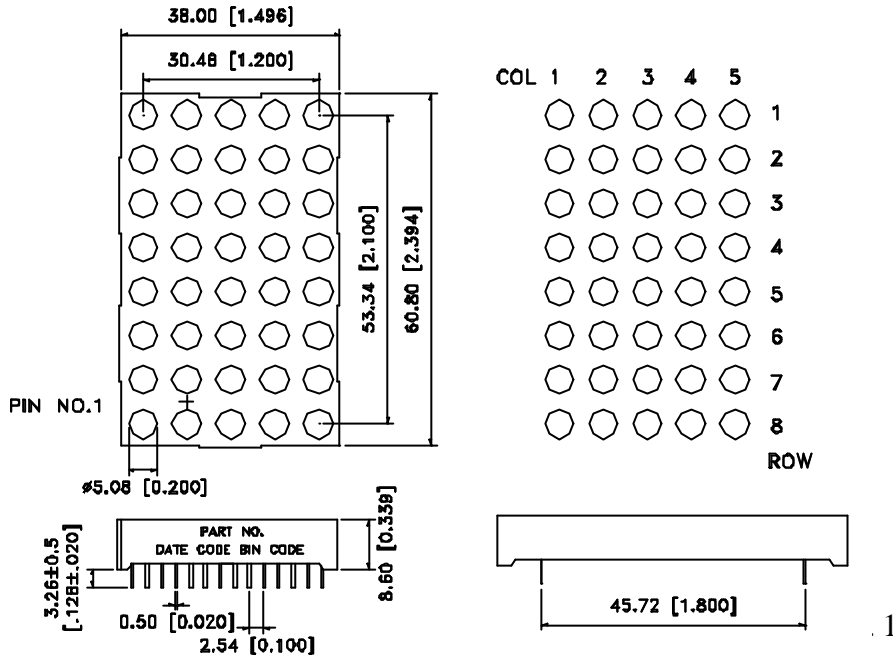

Unit:mm(inches)

Tolerance is ± 0.25mm(0.01") unless otherwise noted

INTERNAL CIRCUIT DIAGRAM

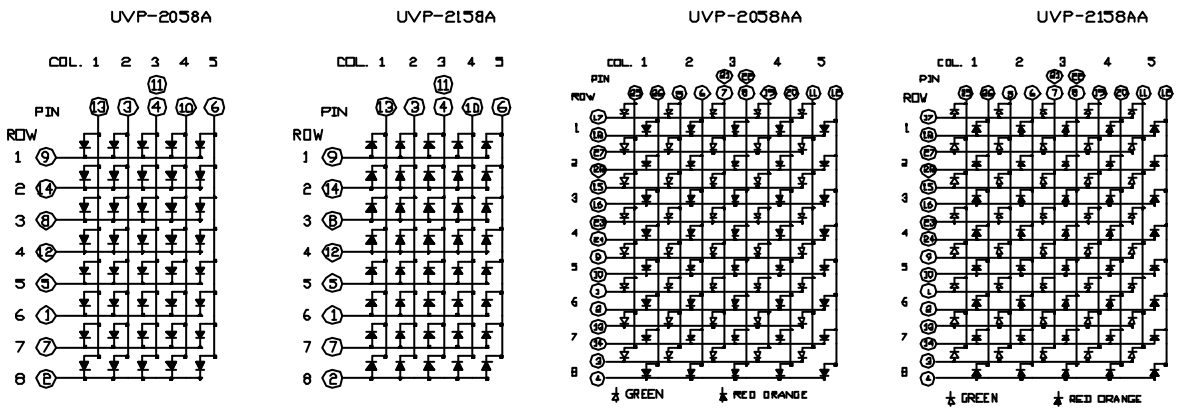


Fig. 2



**2.3 inch ( 58.42mm )**

**5X8 DOT MATRIX LED DISPLAY**

**UVP-2X58XX SERIES**

**PIN CONNECTION**

Pin No.	CONNECTION	
	UVP-2058A	UVP-2158A
1	CATHODE ROW 6	ANODE ROW 6
2	CATHODE ROW 8	ANODD ROW 8
3	ANODE COL. 2	CATHODE COL. 2
4	ANODE COL. 3*1	CATHODE COL. 3*1
5	CATHODE ROW 5	ANODE ROW 4*2
6	ANODE COL. 5	CATHODE COL. 5
7	CATHODE ROW 7	ANODE ROW 7
8	CATHODE ROW 3	ANODE ROW 3
9	CATHODE ROW 1	ANODE ROW 1
10	ANODE COL. 4	CATHODE COL. 4
11	ANODE COL. 3*1	CATHODE COL. 3*1
12	CATHODE ROW 4	ANODE ROW 4
13	ANODE COL. 1	CATHODE COL. 1
14	CATHODE ROW 2	ANODE ROW 2

Notes : 1.Pin 4 &11 are internally Connected.

Pin No.	CONNECTION	
	UVP-2458AA	UVP-2558AA
1	CATHODE ROW 6 GREEN	ANODE ROW 6 GREEN
2	CATHODE ROW 6 RED ORANGE	ANODE ROW 6 RED ORANGE
3	CATHODE ROW 8 GREEN	ANODE ROW 8 GREEN
4	CATHODE ROW 8 RED ORANGE	ANODE ROW 8 RED ORANGE
5	ANODE COLUMN 2 GREEN	CATHODE COLUMN 2 GREEN
6	ANODE COLUMN 2 RED ORANGE	CATHODE COLUMN 2 RED ORANGE
7	ANODE COLUMN 3 GREEN	CATHODE COLUMN 3 GREEN
8	ANODE COLUMN 3 RED ORANGE	CATHODE COLUMN 3 RED ORANGE
9	CATHODE ROW 5 GREEN	ANODE ROW 5 GREEN
10	CATHODE ROW 5 RED ORANGE	ANODE ROW 5 RED ORANGE
11	ANODE COLUMN 5 GREEN	CATHODE COLUMN 5 GREEN
12	ANODE COLUMN 5 RED ORANGE	CATHODE COLUMN 5 RED ORANGE
13	CATHODE ROW 7 GREEN	ANODE ROW 7 GREEN
14	CATHODE ROW 7 RED ORANGE	ANODE ROW 7 RED ORANGE
15	CATHODE ROW 3 GREEN	ANODE ROW 3 GREEN
16	CATHODE ROW 3 RED ORANGE	ANODE ROW 3 RED ORANGE
17	CATHODE ROW 1 GREEN	ANODE ROW 1 GREEN
18	CATHODE ROW 1 RED ORANGE	ANODE ROW 1 RED ORANGE
19	ANODE COLUMN 4 GREEN	CATHODE COLUMN 4 GREEN
20	ANODE COLUMN 4 RED ORANGE	CATHODE COLUMN 4 RED ORANGE
21	ANODE COLUMN 3 GREEN	CATHODE COLUMN 3 GREEN
22	ANODE COLUMN 3 RED ORANGE	CATHODE COLUMN 3 RED ORANGE
23	CATHODE ROW 4 GREEN	ANODE ROW 4 GREEN
24	CATHODE ROW 4 RED ORANGE	ANODE ROW 4 RED ORANGE
25	ANODE COLUMN 1 GREEN	CATHODE COLUMN 1 GREEN
26	ANODE COLUMN 1 RED ORANGE	CATHODE COLUMN 1 RED ORANGE
27	CATHODE ROW 2 GREEN	ANODE ROW 2 GREEN
28	CATHODE ROW 2 RED ORANGE	ANODE ROW 2 RED ORANGE

## 2.3 inch ( 58.42mm ) 5X8 DOT MATRIX LED DISPLAY      UVP-2X58XX SERIES

### ELECTRICAL/OPTICAL CHARACTERISTICS AlGaAs RED (UVP-2058AC/2158AC)

@ T<sub>A</sub>=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I <sub>V</sub>	6300	12000		μcd	I <sub>p</sub> = 80 mA 1/16 Duty
Peak Emission Wavelength	λ <sub>p</sub> /Hue		660/638		nm	I <sub>F</sub> = 20 mA
Spectral Line Half-Width	Δλ		35		nm	I <sub>F</sub> = 20 mA
Forward Voltage, any Dot	V <sub>F</sub>		1.8	2.4	V	I <sub>F</sub> = 20 mA
Reverse Current, any Dot	I <sub>R</sub>			100	μA	V <sub>R</sub> = 5 V
Luminous Intensity Matching Ratio	I <sub>V-m</sub>			2:1		I <sub>F</sub> = 10 mA

### GREEN (UVP-2058AG/2158AG) & (UVP-2458AA/2558AA GREEN) @ T<sub>A</sub>=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I <sub>V</sub>	1780	4800		μcd	I <sub>p</sub> = 80 mA 1/16 Duty
Peak Emission Wavelength	λ <sub>p</sub> /Hue		565/569		nm	I <sub>F</sub> = 20 mA
Spectral Line Half-Width	Δλ		30		nm	I <sub>F</sub> = 20 mA
Forward Voltage, any Dot	V <sub>F</sub>		2.1	2.6	V	I <sub>F</sub> = 20 mA
Reverse Current, any Dot	I <sub>R</sub>			100	μA	V <sub>R</sub> = 5 V
Luminous Intensity Matching Ratio	I <sub>V-m</sub>			2:1		I <sub>F</sub> = 10 mA

### RED ORANGE (UVP-2058AE/2158AE) & (UVP-2458AA/2558AA RED ORANGE) @ T<sub>A</sub>=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I <sub>V</sub>	1780	4800		μcd	I <sub>p</sub> = 80 mA 1/16 Duty
Peak Emission Wavelength	λ <sub>p</sub> /Hue		630/621		nm	I <sub>F</sub> = 20 mA
Spectral Line Half-Width	Δλ		40		nm	I <sub>F</sub> = 20 mA
Forward Voltage, any Dot	V <sub>F</sub>		2.0	2.6	V	I <sub>F</sub> = 20 mA
Reverse Current, any Dot	I <sub>R</sub>			100	μA	V <sub>R</sub> = 5 V
Luminous Intensity Matching Ratio	I <sub>V-m</sub>			2:1		I <sub>F</sub> = 10 mA

# 2.3 inch ( 58.42mm ) 5X8 DOT MATRIX LED DISPLAY      UVP-2X58XX SERIES

## TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

( Ambient Temperature =25°C Unless Otherwise Noted )



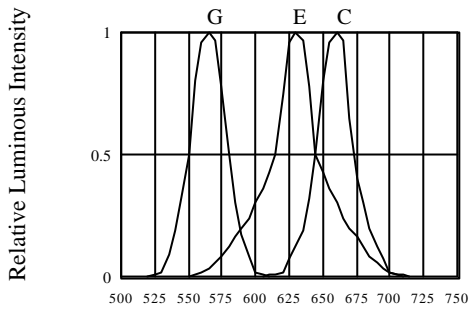



FIG.1 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

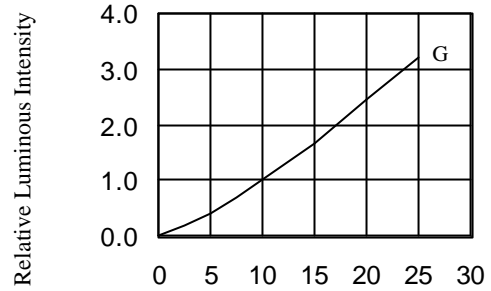


Forward Current  $I_F$  (mA)  
FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

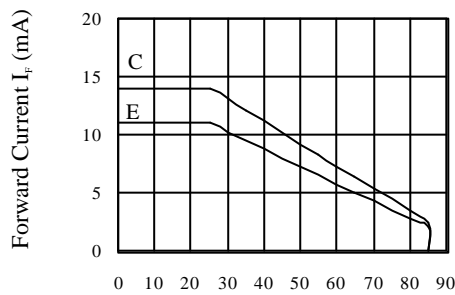


Ambient Temperature (°C)  
FIG.3 ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

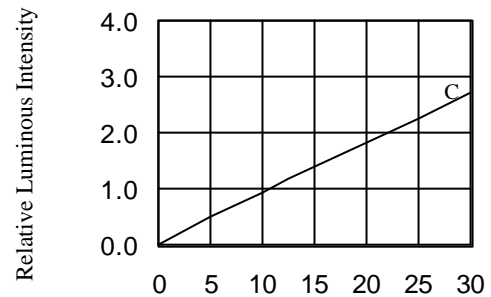

Forward Current  $I_F$  (mA)  
FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

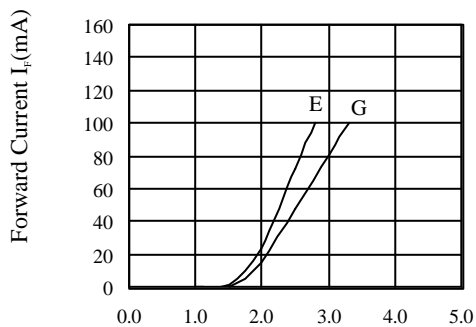

Forward Voltage (V)  
FIG.4 FORWARD CURRENT VS. FORWARD VOLTAGE

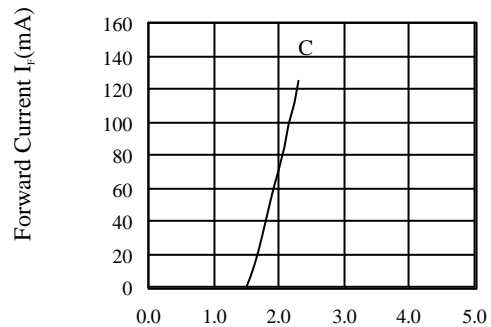

Forward Voltage (V)  
FIG.4 FORWARD CURRENT VS. FORWARD VOLTAGE