



UZ2085A

Preliminary

LINEAR INTEGRATED CIRCUIT

3A ADJUSTABLE/FIXED LOW DROPOUT LINEAR REGULATOR

DESCRIPTION

The UTC **UZ2085A** series are low dropout three-terminal regulators with 3A output current capability. These devices have been optimized for low voltage applications including VTT bus termination in which transient response and minimum input voltage are critical.

Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limitation provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.

FEATURES

- * Fast transient response
- * Low dropout voltage at up to 3A
- * Trimmed current limit
- * On-chip thermal limiting
- * Ultra low current consumption (0.35mA typ.)
- * Ultra low Adjustment Current (7µA typ.)
- * Ultra low minimum Load (0.3mA typ.)
- * Stable with low ESR ceramic output capacitor (MLCC)


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UZ2085AL-xx-TN3-T	UZ2085AG-xx-TN3-T	TO-252	A/G	O	I	Tube
UZ2085AL-xx-TN3-R	UZ2085AG-xx-TN3-R	TO-252	A/G	O	I	Tape Reel


Note: 1. xx: Output Voltage, refer to Marking Information.

2. A: ADJ (for adjustable regulator), G: GND (for fixed regulator), O: V_{OUT} , I: V_{IN}


<p>UZ2085AL-xx-TN3-T</p> <p>(1) Packing Type (2) Package Type (3) Output Voltage Code (4) Lead Free</p>	<p>(1) T: Tube, R: Tape Reel (2) TN3: TO-252 (3) xx: Refer to Marking Information (4) L: Lead Free, G: Halogen Free</p>
---	---

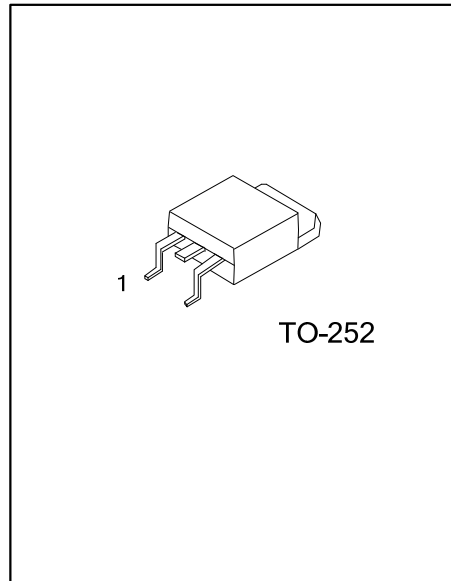

■ MARKING INFORMATION

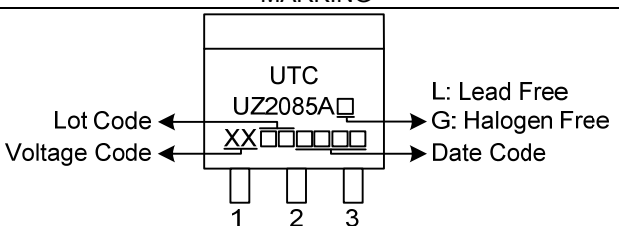PACKAGE	VOLTAGE CODE	MARKING
TO-252	AD:ADJ	 <p>UTC UZ2085A XX Lot Code Voltage Code L: Lead Free G: Halogen Free Date Code</p> <p>1 2 3</p>

■ BLOCK DIAGRAM

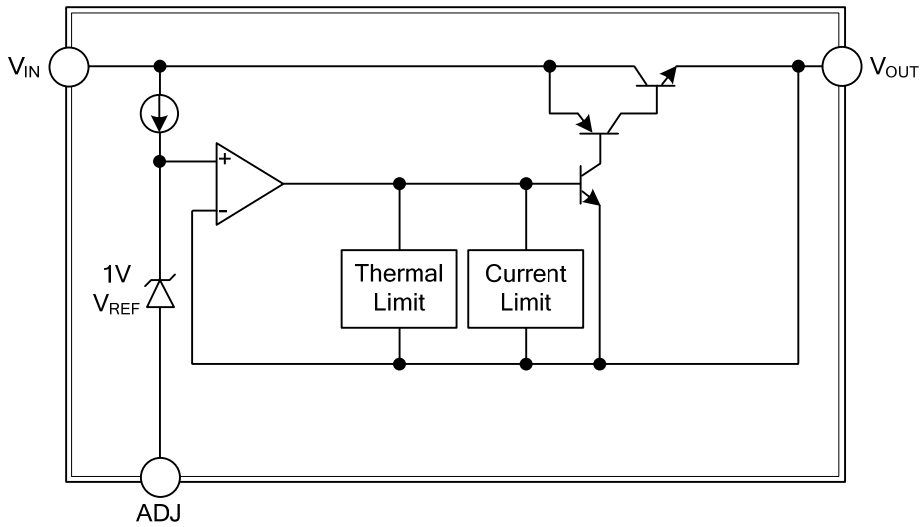

For Adjustable Voltage

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER SYMBOL		RATINGS	UNIT
Input Voltage	V_{IN}	18	V
Power Dissipation	P_D	Internally Limited	W
Junction Temperature	T_J	+150	°C
Operating Temperature	T_{OPR}	-20 ~ +85	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

Note:1 Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	118	°C/W
Junction to Case	θ_{JC}	12	°C/W

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, $C_{OUT}=22\mu\text{F}$, unless otherwise specified.)


For UZ2085A-ADJ (Adjustable Voltage)

PARAMETER SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Reference Voltage	$V_{REF} 1.5V \leq (V_{IN} - V_{OUT}) \leq 8.25V, 10mA \leq I_{OUT} \leq 3A$	0.98	1.0	1.02	V
Line Regulation	$\Delta V_{OUT} (V_{OUT} + 1.5V) \leq V_{IN} \leq 12V, I_{OUT} = 10mA$		0.005	0.2	%
Load Regulation	$\Delta V_{OUT} (V_{IN} - V_{OUT}) = 3V, 10mA \leq I_{OUT} \leq 3A$		0.05	0.5	%
Dropout Voltage	$V_D \Delta V_{REF} \% = 1\%, I_{OUT} = 3A$		1.2	1.40	V
Current Limit	$I_{LIMIT} (V_{IN} - V_{OUT}) = 2V \ 3.1$		5.8		A
Adjust Pin Current	I_{ADJ}		7	10	μA
Adjust Pin Current Change	$\Delta I_{ADJ} (V_{OUT} + 1.5V) \leq V_{IN} \leq 12V, 10mA \leq I_{OUT} \leq 3A$		0.3	2	μA
Minimum Load Current	$I_{O(MIN)} (V_{OUT} + 1.5V) \leq V_{IN} \leq 12V$		0.3	1	mA
Ripple Rejection	$RR f = 120\text{Hz}, \text{Tantalum}, (V_{IN} - V_{OUT}) = 3V \ I_{OUT} = 3A$	45			dB
Thermal Regulation	$T_A = 25^\circ\text{C}, 30\text{ms pulse}$		0.004	0.02	%/W
Temperature Stability	ΔV_{OUT}	0.5			%
Long-Term Stability	$\Delta V_{OUT} T_A = 125^\circ\text{C}, 1000\text{hr}$		0.03	1.0	%
Output Noise(% of V_{OUT}) e	$N T_A = 25^\circ\text{C}, 10\text{Hz} \leq f \leq 10\text{kHz}$		0.003		%
Thermal Shutdown		150			°C


■ TYPICAL APPLICATION CIRCUIT

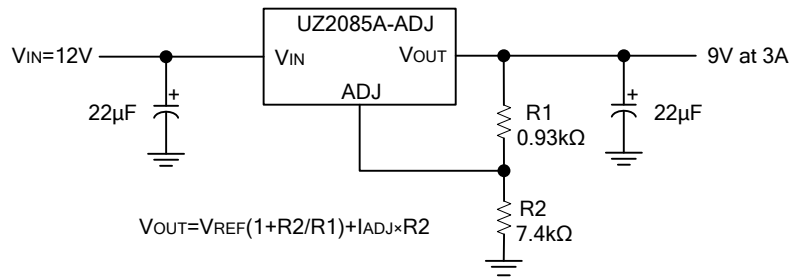

The UTC **UZ2085A** also supports MLCC.

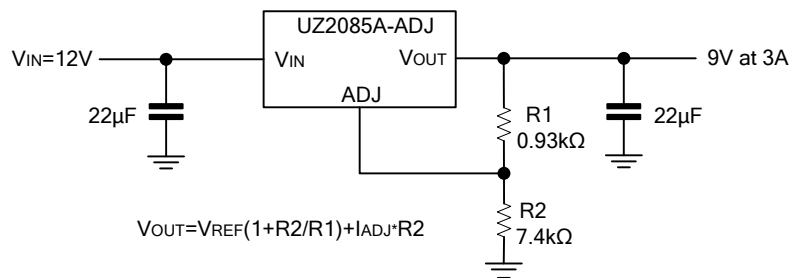

■ TYPICAL CHARACTERISTICS

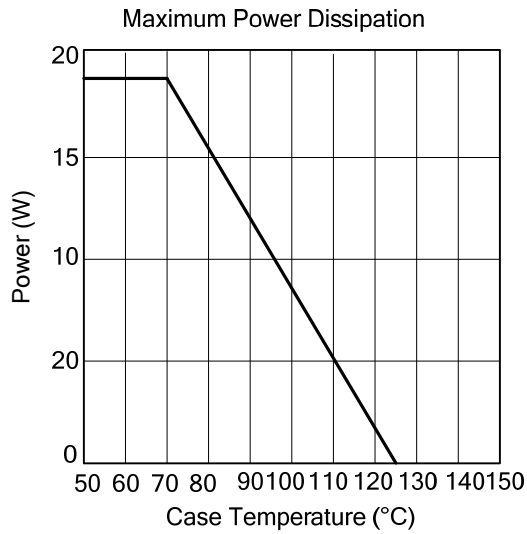

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.