

SIEMENS



Miniature Relays P1

Product Information

PCB relays – Pin or SMD – for DC operation, polarised, monostable or bistable

Features

- Universal ultra miniature relay with optimum capabilities
- Directly triggerable with TTL standard modules such as ALS, HCT and ACT
- Especially high sensitivity
- Extremely small size:
base area only 0.98 cm² or 1.07 cm²
volume only 0.68 cm³ or 0.85 cm³
- Relay system encapsulated in epoxy resin, thus especially immune to environmental influences
- Very high grade of shock resistance

Typical applications

- Storage element for input and output equipment
- Data and communication technology
- Medical equipment
- Measurement and control equipment
- Automobile technology
- Safety engineering
- Toy engineering

Versions

- Relay types: monostable, 1 winding or bistable, 2 windings or bistable, 1 winding
- With 1 changeover contact
- With bifurcated contacts
- FCC version on request. Testing of open contacts with surge voltage in accordance with FCC 68.302 (1.5 kV, 10/160 µs) passed
- Automatically placeable from bar magazines (e.g. on Siemens HS-180)
- For SMD configuration, strap packaging possible on request
- For printed circuit assembling
- Immersion cleanable

Approvals



CECC

Option: with qualification approval in accordance with CECC 16501-002/ VDE 400.74/04.90 for pin version



CSA

File LR 45064-5




UL

File E 48393

Miniature Relay P1

Pin version

Dimension drawing (in mm)

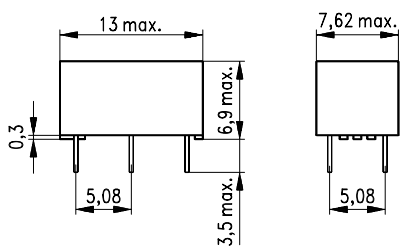

ECR0668-9



Orientation mark (imprinted)




ECR0995-P

Approx. 1.5 x original size

Mounting hole layout

View on the terminals




ECR0669-H

Basic grid 2.54 mm according to EN 60097 and DIN 40803

Terminal assignment

View on the terminals


Monostable and bistable,
1 winding



ECR0670-K

The contact position illustrated shows the release condition. If a positive potential is applied to terminal 3, the relay adopts the operating position.

Bistable,
2 windings





ECR0671-T

The contact position illustrated shows the release condition. If a positive potential is applied to terminal 3 or a negative potential to terminal 6 as against terminal 8, the relay adopts the operating position.

Miniature Relay P1

SMD version

Dimension drawing (in mm)

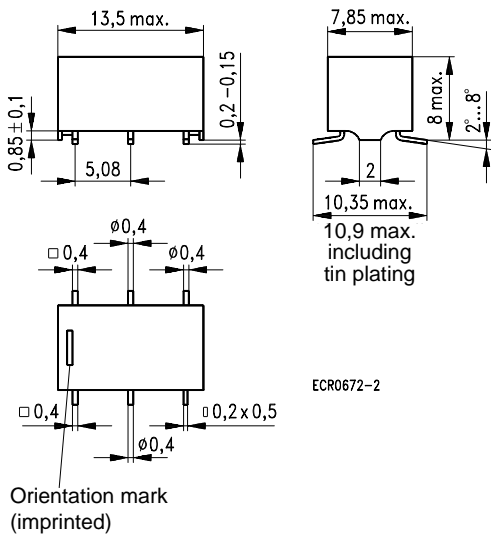


ECR0994-G

Approx. 1.5 x original size


Solder pad layout

Attention: View onto the component side of the PCB!




Terminal assignment

View on the terminals
Monostable and bistable,
1 winding



The contact position illustrated shows the release condition.
If a positive potential is applied to terminal 3, the relay adopts the operating position.

Bistable,
2 windings




The contact position illustrated shows the release condition.
If a positive potential is applied to terminal 3 or a negative potential to terminal 6 as against terminal 8, the relay adopts the operating position.

Miniature Relay P1

Contact data

Number of contacts and type	1 changeover contact
Contact assembly	Bifurcated contacts
Contact material	Pd Ni, Au Rh coated
Limiting continuous current at max. ambient temperature	1 A
Maximum switching current	1 A
Maximum switching voltage	125 V~ 150 V-
Maximum switching capacity DC voltage AC voltage	30 W, see load limit curve 60 VA
Recommended for load voltages greater than	100 μ V
Contact resistance (initial value) / measuring current / driver voltage	$\leq 50 \text{ m}\Omega$ / 10 mA / 20 mV

Load limit curve

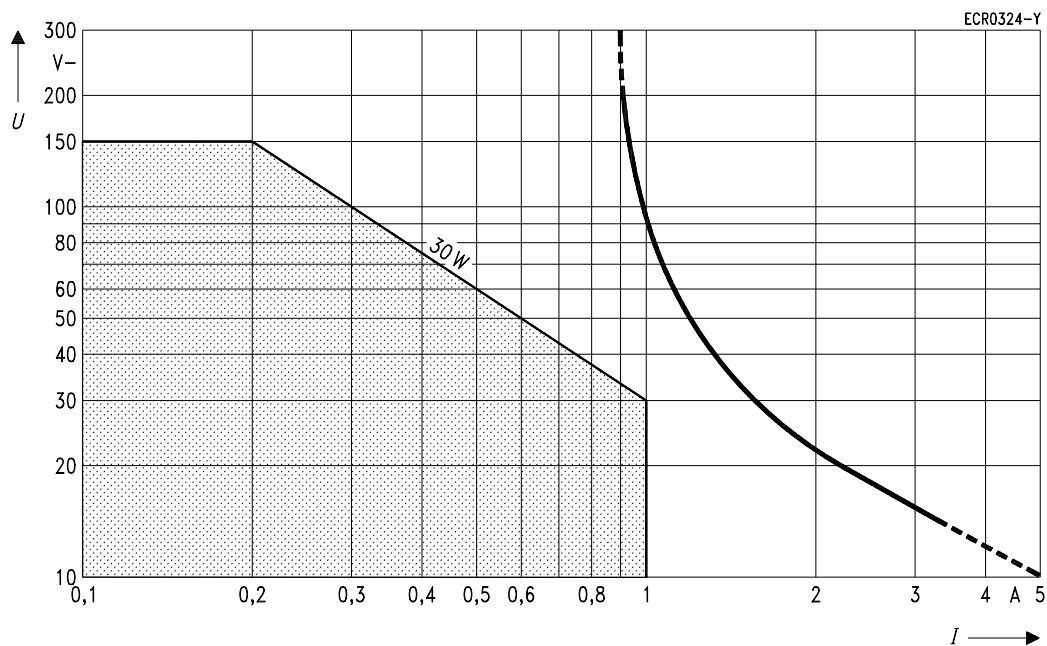

I = switching current

U = switching voltage

■ = recommended application field

Load limit curve: Safe shutdown, no stationary arc > 10 ms

Miniature Relay P1

Coil data	
Nominal voltages	From 1.5 V– to 24 V–
Nominal power consumption monostable with 1 winding bistable with 2 windings bistable with 1 winding	65 ... 130 mW 65 ... 150 mW 30 ... 130 mW
Operative range/pick-up class according to IEC 255-1-00 and VDE 0435 Part 201	1/a
Maximum operate voltage	75 % of nominal voltage
Maximum release voltage (bistable)	75 % of nominal voltage
Minimum release voltage (monostable)	10 % of nominal voltage

U_I = Minimum voltage at 20 °C after pre-energizing with nominal voltage without contact current
 U_{II} = Maximum continuous voltage at 20 °C

The operating voltage limits U_I and U_{II} are dependent on the temperature according to the formulae:

$$U_{I \text{ tamb}} = k_I \cdot U_{I \text{ 20 °C}}$$

and


$$U_{II \text{ tamb}} = k_{II} \cdot U_{II \text{ 20 °C}}$$

t_{amb} = Ambient temperature

$U_{I \text{ tamb}}$ = Minimum voltage at ambient temperature t_{amb}

$U_{II \text{ tamb}}$ = Maximum voltage at ambient temperature t_{amb}

k_I a. k_{II} = Factors (dependent on temperature), see diagram

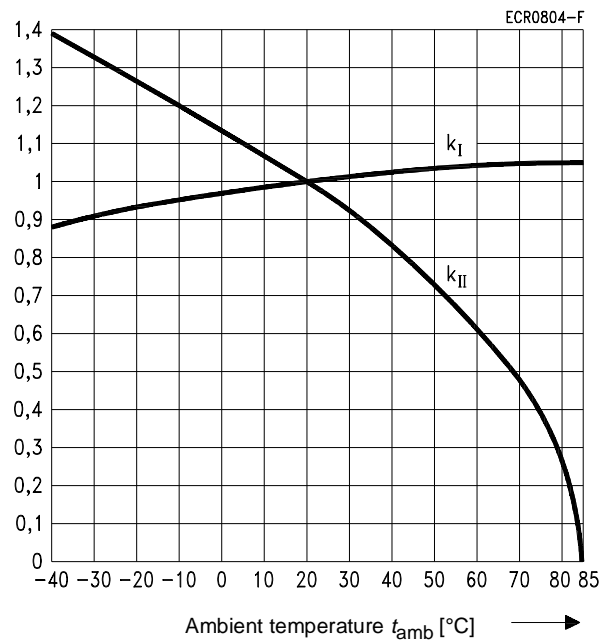

Miniature Relay P1

Coil versions

Nominal voltage U_{nom} V–	Operating voltage range at 20 °C		Resistance at 20 °C Ω	Coil number Ordering code block 2
	Minimum voltage, U_{I} V–	Maximum voltage, U_{II} V–		

Pin version

monostable, 1 winding				-A1***
3	2.25	8.8	137 ± 14	006
5	3.75	14.5	370 ± 37	001
12	9	35	2250 ± 225	002
24	18	50	4500 ± 450	004
bistable, 2 windings (windings I and II identical)				-B1***
3	2.25	8.55	130 ± 13	106
5	3.75	14.75	390 ± 39	101
12	9	29	1500 ± 150	102
24	A nominal voltage of 24 V is feasible with a 12 V winding with a series resistor (1500 Ω)			
bistable, 1 winding				-C1***
3	2.25	13	300 ± 30	056
5	3.75	20	740 ± 74	051
12	9	50	4500 ± 450	052
24 ¹⁾	18	50	4500 ± 450	054

SMD version

monostable, 1 winding				-D1***
3	2.25	8	113 ± 11	026
5	3.75	13.3	313 ± 31	021
12	9	35	1800 ± 180	022
24	18	50	4500 ± 450	024
bistable, 2 windings (windings I and II identical)				-E1***
3	2.25	8.55	130 ± 13	106
5	3.75	14.75	390 ± 39	101
12	9	29	1500 ± 150	102
24	A nominal voltage of 24 V is feasible with a 12 V winding with a series resistor (1500 Ω)			
bistable, 1 winding				-F1***
3	2.25	13	300 ± 30	056
5	3.75	20	740 ± 74	051
12	9	50	4500 ± 450	052
24 ¹⁾	18	50	4500 ± 450	054

1) At 24 V operation of the 12 V winding with a series resistor of 4500 Ω results in reduced power consumption.

Further coil versions e.g. 1.5 V, 9 V or 15 V are available on request.

Miniature Relay P1


General data	
Operate time at U_{nom} and at 20 °C, typ.	1 ms
Release time at U_{nom} and at 20 °C (bistable), typ.	1 ms
Release time without/with diode in parallel (monostable), typ.	0.4 ms/1.2 ms
Maximum switching rate without load	200 operations/s
Ambient temperature according to IEC 255-1-00 / VDE 0435 Part 201	-40 °C ... +70 °C (... +85 °C on request)
Thermal resistance	130 K/W
Maximum permissible coil temperature	85 °C
Vibration resistance (function), frequency range according to IEC 68-2-6	20 g, 200 - 2000 Hz 40 g, 10 - 200 Hz
Shock resistance (function), half sinus, 11 ms according to IEC 68-2-27	50 g
Degree of protection according to IEC 529 / VDE 0470 Part 1	immersion cleanable, IP 67 sealing corresponds to IEC 68-2-17, method Qc 2
Electrical endurance for resistive load: 6 V-, 100 mA 24 V-, 1 A	approx. 5×10^7 operations approx. 3×10^6 operations
Mechanical endurance	approx. 1×10^9 operations
Flammability	flame resistance according to IEC 695-2-2
Mounting position	any
Processing information	ultrasonic cleanable
Weight (mass)	approx. 1.8 g

Insulation	
Insulation resistance at 500 V	$\geq 10^9 \Omega$
Dielectric test voltage contact / winding (1 min)	1500 V _{rms} (2000 V _{rms} on request)
Dielectric test voltage at open contact (1 min)	500 V _{rms}
Clearances/creepage distances coil/contact	0.75 mm / 0.75 mm

Note: Relays with surge voltage resistance of 2.5 kV, 2/10 μ s on request

Miniature Relay P1

Ordering code

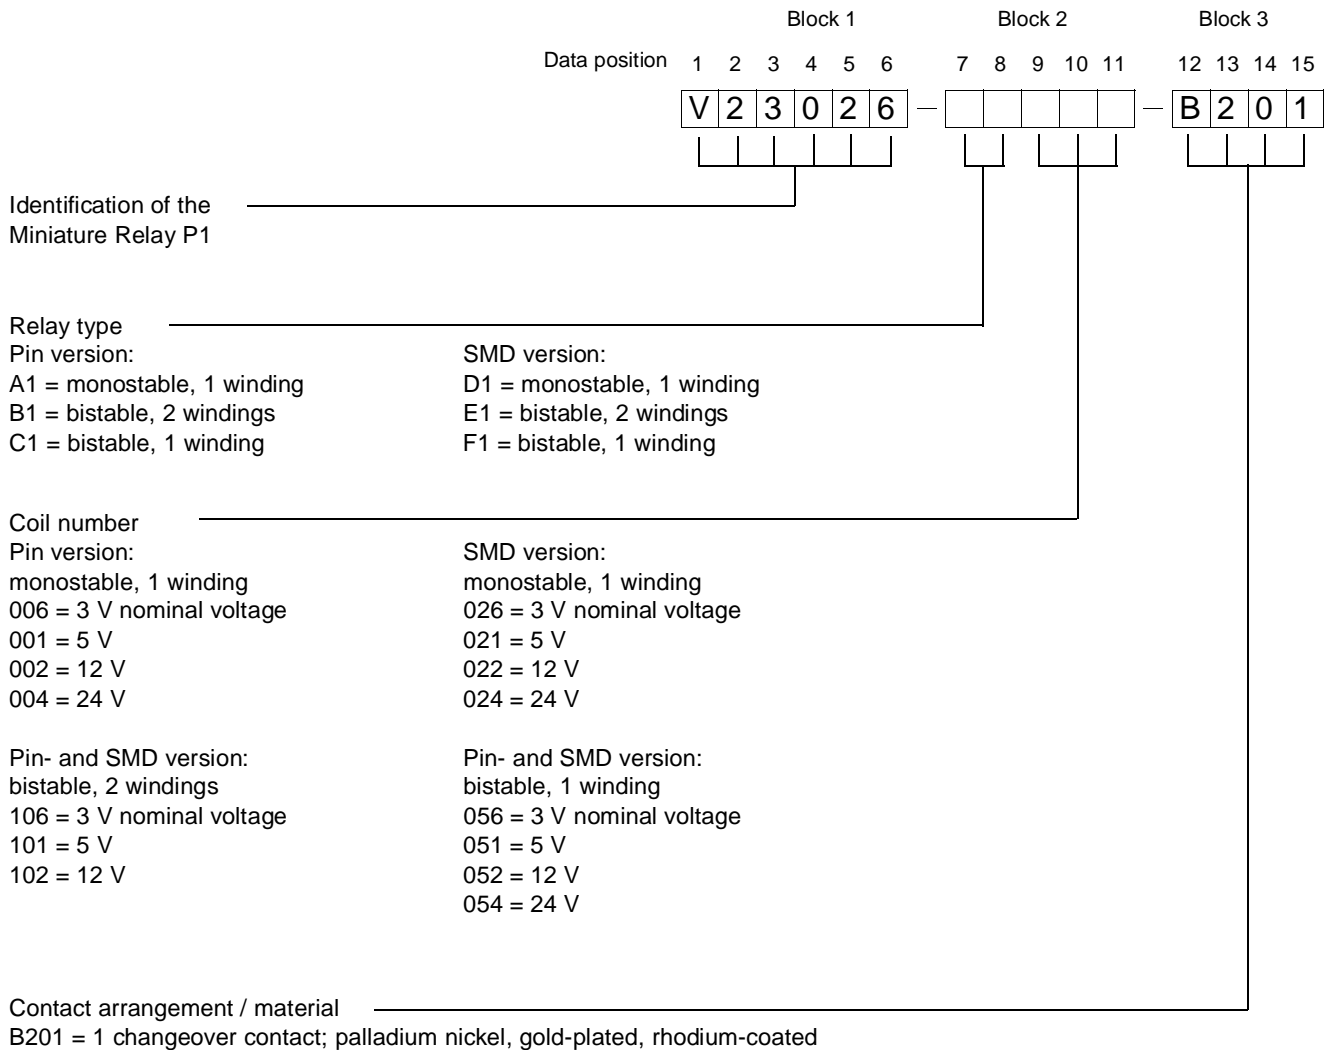

Ordering example: V23026-B1102-B201

Miniature relay P1, Pin version, bistable, coil with 2 windings, 12 V nominal voltage

Note:

The ordering scheme enables a multitude of variations. However, not all variations are defined as construction specifications (ordering code) and thus in the current delivery program.

Special designs can be carried out to customer specifications. Please contact your local representative. The addresses are given on the back page.

Siemens in your area

Africa

Republic of South Africa

Siemens
Components Division
Stand No. 2, Fedlife Park
Midrand 1685 Pri.Bag X71
Halfway House 1685-Südafrika
☎ (011) 315-19 50
FAX (011) 315-19 68

America

Argentina

Siemens S. A.
Av.Gral. Roca 1865
Ruta 8, Km. 18
RA-1650 San Martin Pcia, de Buenos Aires
☎ (01) 738 7175
FAX (01) 738 7153

Brazil

Icotron S.A.
Sede Central
Vendas Mercado Nacional
Avenida Mutingua, 3650
Pirituba
BRA-05150-900 São Paulo-SP
☎ (011) 836-22 11
FAX (011) 836-27 69

Canada

Siemens Electric Ltd.
2185 Derry Road West
Mississauga
CDN-ON L5N/Canada
☎ (905) 819-8000
FAX (905) 819-5777

Mexico

Siemens S.A. de C.V.
Poniente 116, No. 590
Col. Und. Vallejo
Delegacion Azcapotzalco
MEX-02300 México,D.F.
☎ (05) 328 20 00
FAX (05) 328 21 92

USA

Siemens
Electromechanical
Components Inc.
Headquarters
200 S. Richland Creek Drive
USA-Princeton Indiana 47671-0001
☎ (201) 386 1000
FAX (201) 386 2289

Asia

Hong Kong

Siemens Ltd.
58/F Central Plaza
18 Harbour Road
Wanchai
Hong Kong
☎ 2583 33 88
FAX 2802 98 02

India

Siemens Limited
P.O.Box 5212
Jyothi Mahal, 3rd floor
49, St.Mark's road
IND-Bangalore 560001
☎ (080) 227 2101
FAX (080) 227 2418

Siemens Limited
P.O.Box 6597
134, Dr. Annie Besant Road
Worly
IND-Bombay 400018
☎ (022) 493 8780
FAX (022) 493 0656

Siemens Limited

P.O.Box 7036
4A, Ring Road
I.P.Estate
IND-New Dehli 110002
☎ (011) 331 8144,
FAX (011) 331 4178

Japan

Siemens K.K.
Takanawa Park Tower,19F
20-14 Higashi-Gatanda
3-chome
Shingawa-ku,
Tokyo 141
☎ (03) 5423-8500
FAX (03) 5423-8725

Korea

Siemens Ltd.
Asia Tower Building,
10th Floor
726, Yeoksam-dong,
Kangnam-Gu
C.P.O.B. 3001
Seoul-Korea
☎ (02) 527 7700
FAX (02) 527 7719

Singapore

Siemens (Pte.) Ltd.
2, Kallang Sector
SGP-Singapore 1334
☎ 841 3528
FAX 841 3529

Taiwan

Siemens Ltd.
6th Floor
Cathay Life Ins. Bldg.
296, Jen-Ai Road, Sec.4
P.O.B. 58284
Taipei 106
☎ (02) 325-48 88
FAX (02) 705-49 75

Thailand

Siemens Systems Ltd
Cham Issara TowerII, 25/F
2922/283 New Petchburi
Road
Bangkapi, Huay Kwang
Bangkok 10310
☎ (02) 308 2011
FAX (02) 308 2411

Australia

Australia

Siemens Ltd.
Melbourne Head Office
544, Church Street
Richmond Vic. 3121
AUS-Melbourne, Vic. 3121
☎ (03) 9420 7111
FAX (03) 9420 7309

Europe

Belgium

Siemens S.A.
Chaussée de Charleroi 116
B-1060 Bruxelles
☎ (02) 536-2111
FAX (02) 536-2492

Czech Republic

Siemens
Elektropřístroje s.r.o.
Komenskeho 821
CZ-54101 Trutnov
☎ (0439) 805 111
FAX (0439) 805 198

Denmark

Siemens A/S
Borupvang 3
DK-2750 Ballerup
☎ (045) 4477-4477
FAX (045) 4477-4488

Finland

Siemens Osakeyhtiö
Perkkaa
Majurinkatu 6
P.O.B. 60
FIN-02601 Espoo
☎ (080) 51 05-1
FAX (080) 51 05-24 95

France

Siemens S.A.
39-47, Boulevard Ornano
F-93527 Saint-Denis Cedex 2
☎ (01) 49 22-31 00
FAX (01) 49 22-34 13

Great Britain

Siemens plc
Siemens House, Oldbury
Bracknell GB-RG 12 8FZ
☎ (01344) 39-6000
FAX (01344) 39-6133

Greece

Siemens A.E.
Paradissou & Artemidos
P.O.B. 61011
GR-15110 Amaroussio/Athens
☎ (01) 68 64-234
FAX (01) 68 64-211

Hungary

SIMACOMP Kft
Lajos u. 103
H-1300 Budapest
☎ (01) 457-1501
FAX (01) 168-1502

Iceland

Smith & Norland H/F
Nótuni 4,
P.O.B. 519
IS-121 Reykjavik
☎ 511 3000
FAX 511 3011

Ireland

Siemens Ltd.
Electronic Components
Division
8 Raglan Road
IRL- Dublin 4
☎ (01) 603-22 00
FAX (01) 603-23 49

Italy

Siemens S.p.A.
Via dei Valtorta 48
I-20127 Milano
☎ (02) 6676-1
FAX (02) 6676-43 39

Luxembourg

Siemens S.A.
20, Rue des Peupliers
B.P.1701
L-1017 Luxembourg
☎ 43843-1
FAX 43843-222

Netherlands

Siemens Nederland N.V.
Prinses Beatrixlaan 26
Postbus 1 60 68
NL-2500 AN Den Haag
☎ (070) 333-27 44
FAX (070) 333-28 15

Norway

Siemens A/S
Ostre Aker vei 90
Postboks 10, Veitvet
N-0518 Oslo 5
☎ (022) 63 30 00
FAX (022) 63 49 13

Poland

Siemens Sp. z.o.o.
ul. Zupnicza 11
PI- 03-821 Warszawa
☎ (022) 670 9000
FAX (022) 670 9009

Portugal

Siemens S.A.
Estrada Nacional
117, Km 2,6
Apartado 60300
P-2700 Amadora
☎ (01) 417-8000
FAX (01) 417-8044

Spain

Siemens S.A.
Ronda de Europa No. 5
E-28760 Tres Cantos - Madrid
☎ (01) 8031200
FAX (01) 803 4159

Sweden

Siemens AB
Components
Österögaten 1
Box 46
S-16493 Kista
☎ (08) 703-3500
FAX (08) 703-3501

Turkey

SIMKO
Ticaret ve Sanayi A.S
Meclisi Mebusan Cad.125
TR-80040 Findikli/Istanbul
☎ (0212) 251 0900
FAX (0212) 252 4134

Our range of products:

- Relays
- Angle sensors
- Coils
- Connectors
- Switches and pushbuttons
- Hybrids
- Fiber Optics

Information on any of the above product groups is available from your local office.

© Siemens AG 1996. All Rights Reserved.

The information merely serves to specify the components and does not guarantee characteristics. We are not able to guarantee that the specified circuits, descriptions and tables are not covered by rights of third parties. Terms of delivery and rights to change design reserved.

Issued by Electromechanical Components Group (EC)
Hofmannstraße 51, D-81359 Munich

Siemens Aktiengesellschaft

Ref. No. A23001-G11-P060-X-7600

Edition: 06/96 PS 06962.0
Printed in Germany

