

70m LONG DISTANCE
AC power driven photosensor

- Specifications are subject to change without prior notice.
- Specifications and technical information not mentioned here are written in Instruction Manual. Or visit our website for details.
- All the warnings and cautions to know prior to use are given in Instruction Manual.

Photoelectric Sensor
V2 series



- BGS types with a rugged duty housing.
- Up to 100 cm sensing distance (BGS-2V100).
- The large lenses assure stable sensing.
- IP67, QD types are available.

Applications



Gate control
(V2T-7000)



Magazines on roller conveyor
(BGS-2V50)



Parking control
(V2T-7000)




Tire counting
(V2R-1200)

A large projecting and receiving lens results in a strong projected beam. Ideal for use in tough conditions like a foggy atmosphere.



Only 1cm of dead area
(Retro-reflective types)




Connector can be rotated for added flexibility when mounting.
(DC Power type)

The connector rotates 90 degrees for added flexibility when mounting. IP67 is maintained even with the connector.




Circuit diagram


AC/DC type

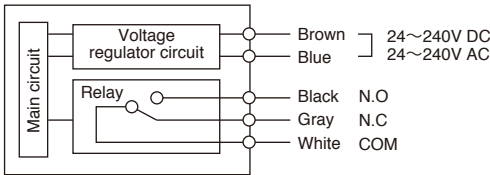


DC NPN type

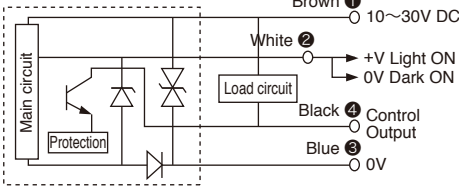

DC Emitter

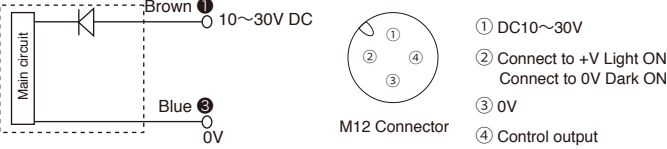


DC PNP type

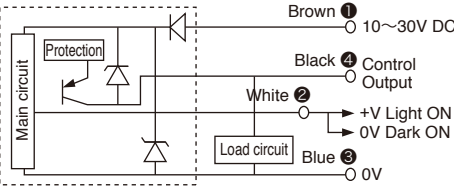


Dimensions

Cable type

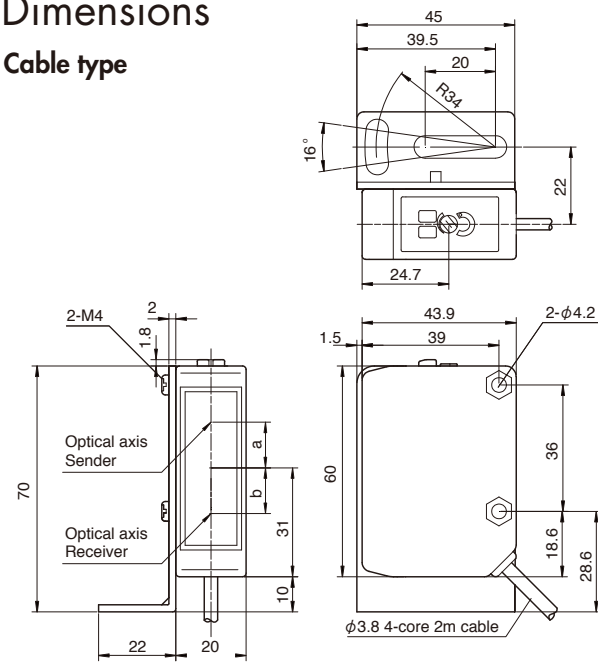

	BGS-2V	V2R-1200	V2T-7000
a	13	16.8	44
b	BGS Short 12.6 / mid 13 / long 13.6	19	-

Connector type

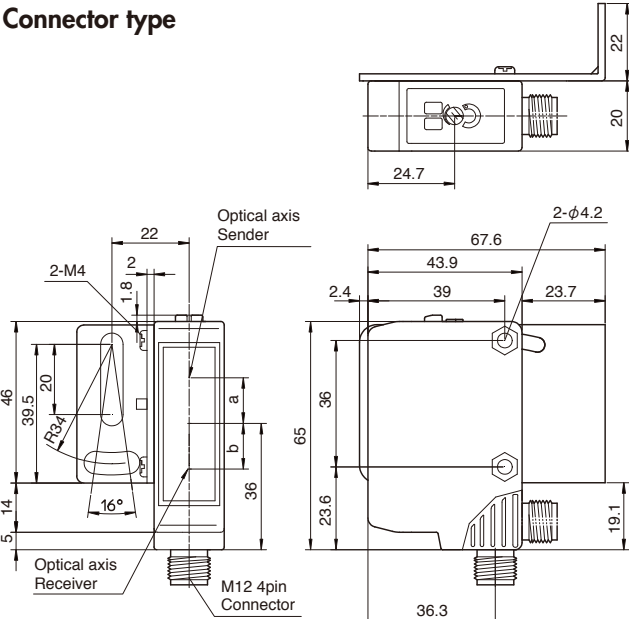


	BGS-2V	V2R-1200	V2T-7000
a	13	16.8	49
b	BGS Short 12.6 / mid 13 / long 13.6	24	-

Specifications


Model	V2 series AC/DC type					V2 series DC type				
	Thru-beam	Retro-reflective (polarized filter)	BGS			Thru-beam	Retro-reflective (polarized filter)	BGS		
Cable type	V2T-7000	V2R-1200	BGS-2V100	BGS-2V50	BGS-2V30	V2T-7000D(N,P)	V2R-1200D(N,P)	BGS-2V100(N,P)	BGS-2V50(N,P)	BGS-2V30(N,P)
Connector type	—	—	—	—	—	V2T-7000CD(N,P)	V2R-1200CD(N,P)	BGS-2V100C(N,P)	BGS-2V50C(N,P)	BGS-2V30C(N,P)
Detecting distance	70m	0.01~12m*1	25~100cm	15~50cm	10~30cm	70m	0.01~12m*1	25~100cm	15~50cm	10~30cm
Light source	Red LED	—	—	—	—	—	—	—	—	—
Supply voltage	DC24~240V±10%	AC24~240V±10%	50/60 H z	—	—	DC10~30V	Including ripple (P-P)10%	—	—	—
Current consumption	3VA max.(class A)	2VA max. (class A)	—	—	—	35mA max.	—	—	—	—
Response time	15ms max.	—	—	—	—	0.5ms max.	—	3ms max.	2ms max.	—
Hysteresis	—	—	20% Max	5% Max	—	—	—	15% max.	5% max.	—
Control output	Relay 1C DC30V 2A / AC250V 3A max.	—	—	—	—	NPN/PNP open collector DC30V 100mA max. (Residual voltage 1.8V max)	—	—	—	—
Operation mode	Light ON	—	—	—	—	Light ON / Dark ON selectable by wiring	—	—	—	—
Sensitivity adjustment	2 rotation volume	—	—	—	—	—	—	—	—	—
Indicator	Output indicator (orange LED) / Stable indicator (green LED)	—	—	—	—	—	—	—	—	—
Ambient temp./humidity	-25~55°C / 35~85%RH (No condensation of freezing)	—	—	—	—	—	—	—	—	—
Storage temp./humidity	-40~70°C / 35~95%RH	—	—	—	—	—	—	—	—	—
Environmental illuminance	Sun light:10000 lx max. Incandescent light:3000 lx max.	—	—	—	—	—	—	—	—	—
Protection category/material	IP67 (IEC 144)/Case: ABS (Glass fiber include) Front cover : PC (PMMA for retro-ref.type)	—	—	—	—	—	—	—	—	—

*1 Reflector V-61


EXCESS GAIN

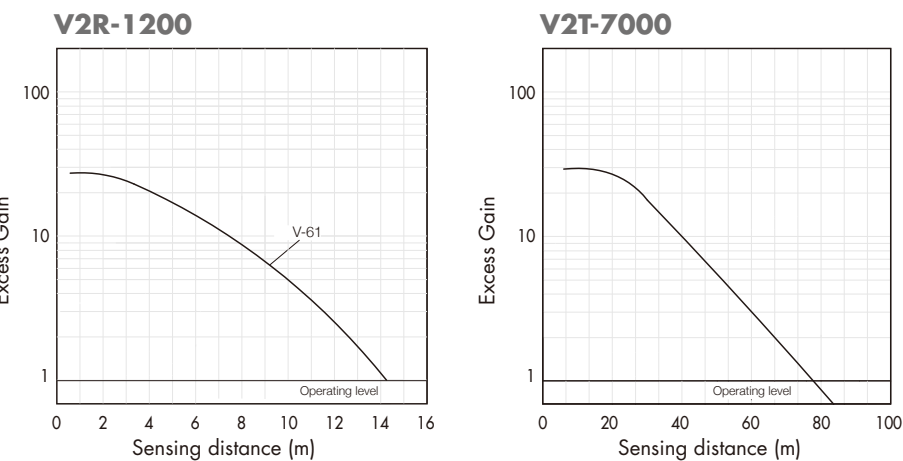


SENSING AREA

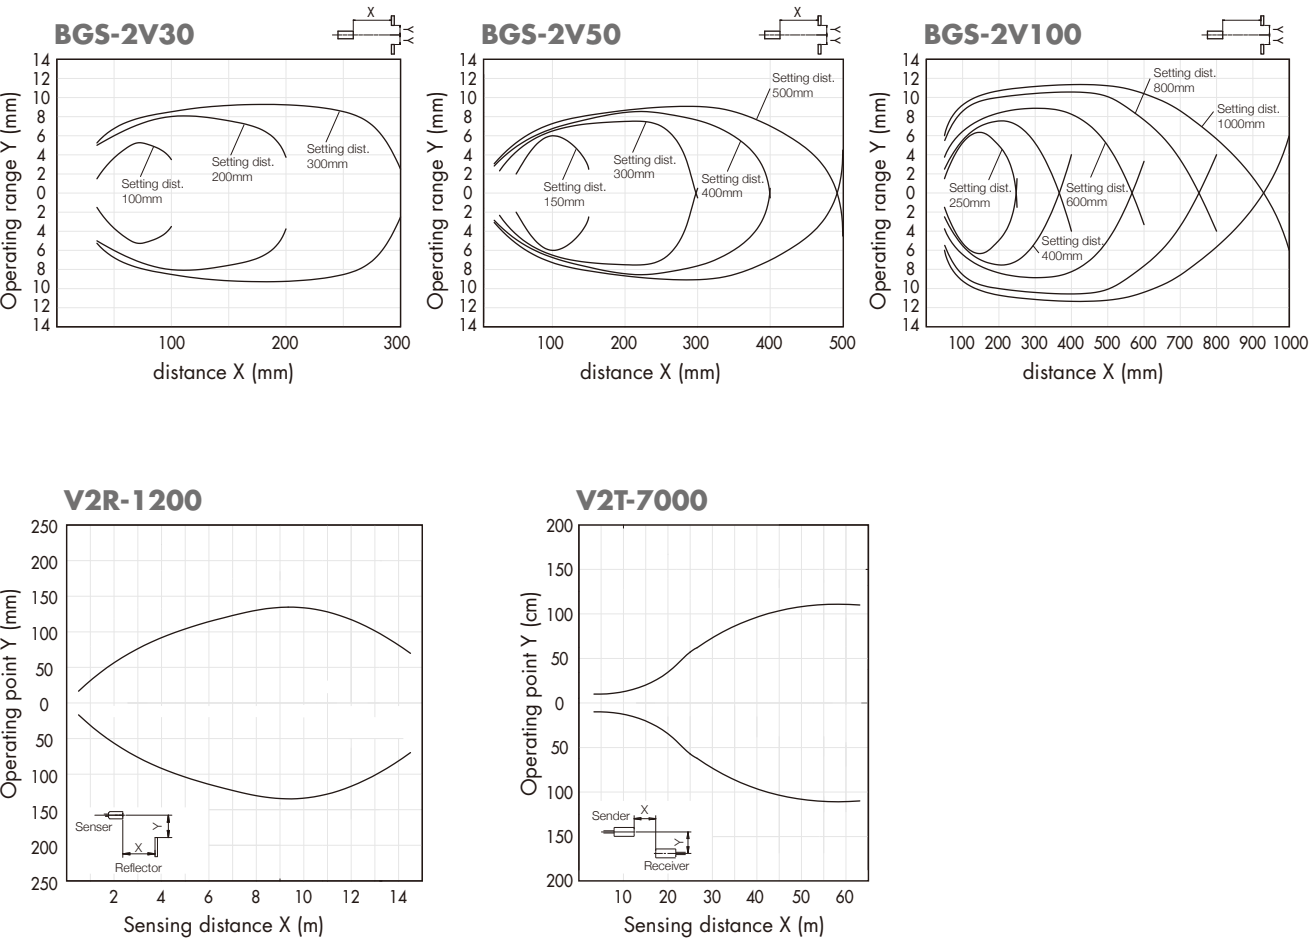


INTERFERENCE AREA

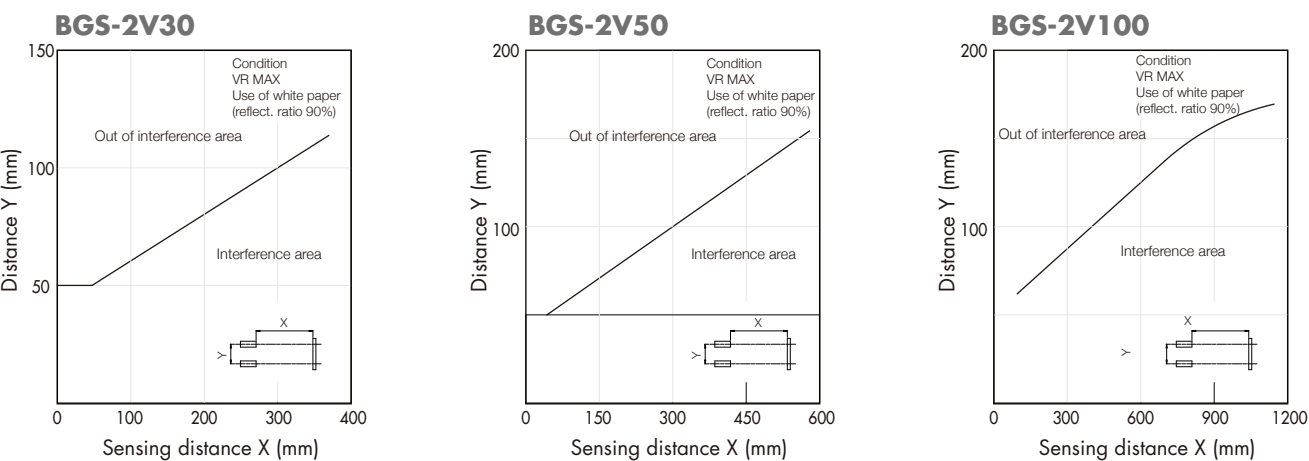


SPOT SIZE

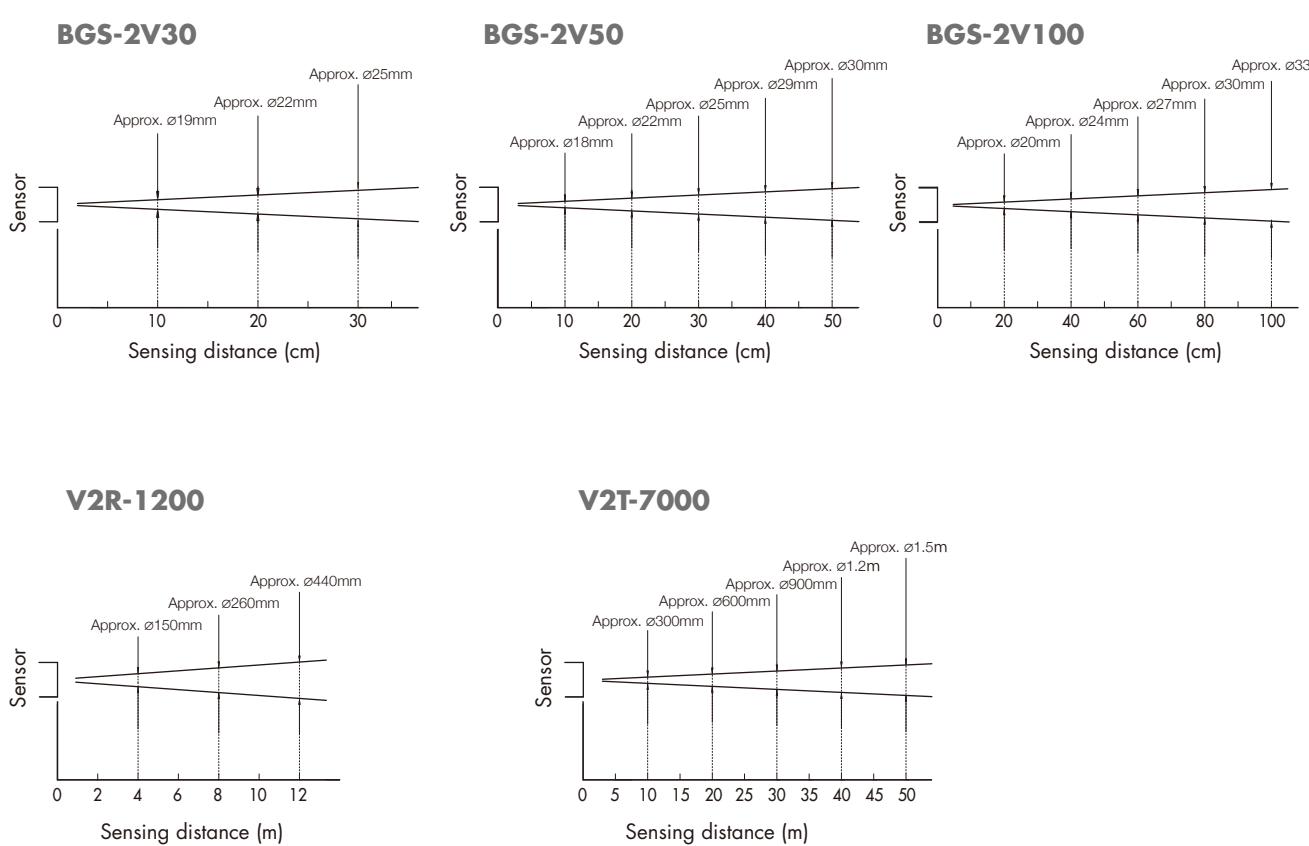


MATERIAL CHARACTERISTICS

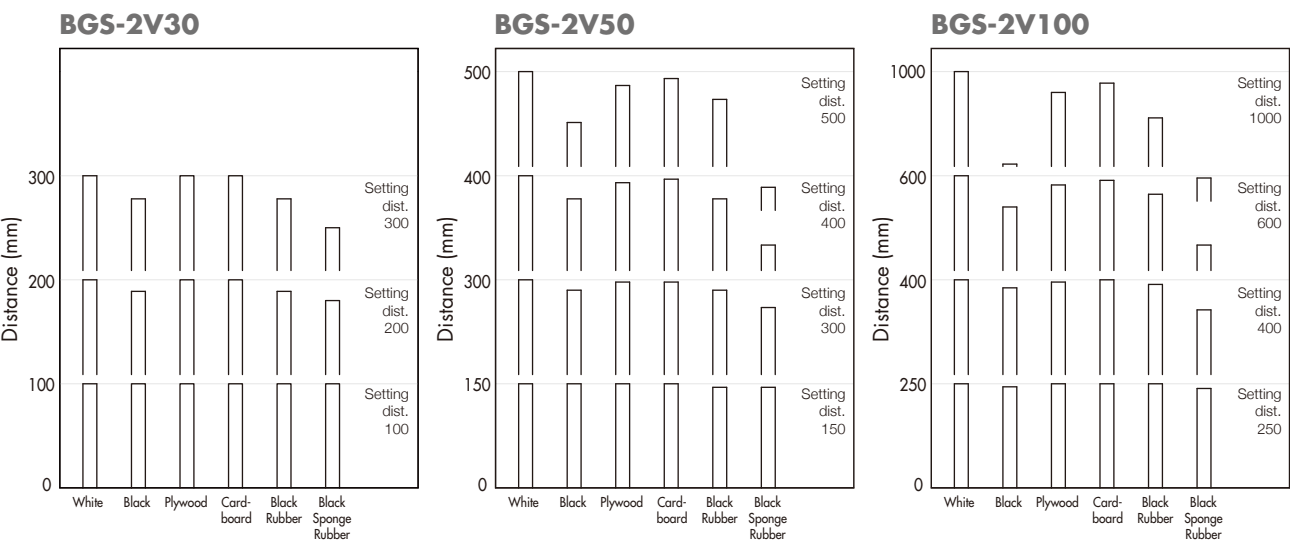

COLOR CHARACTERISTICS

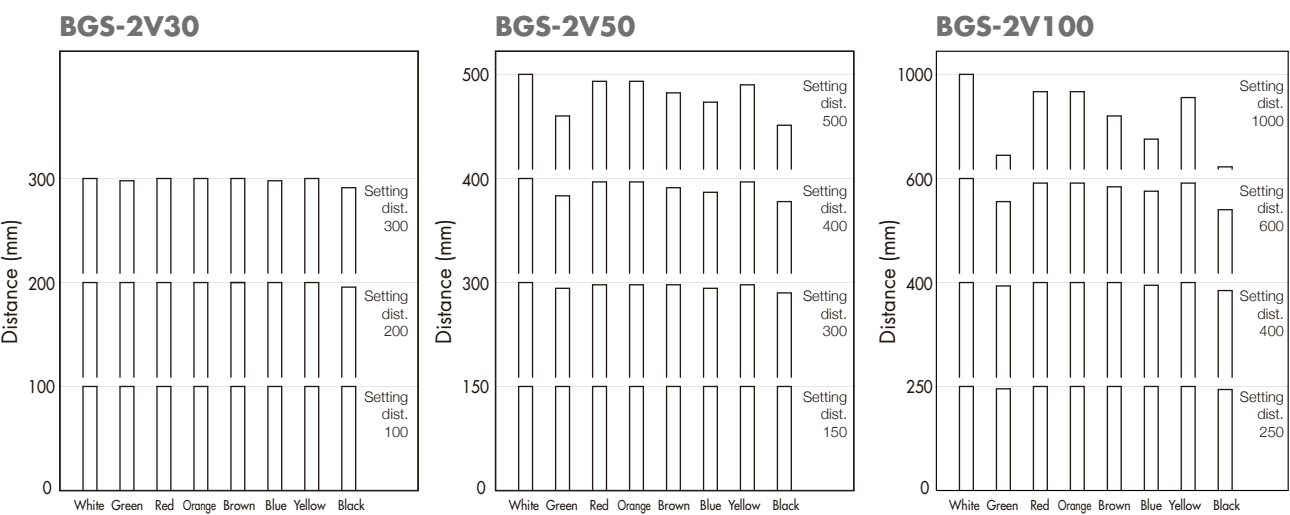


HYSTERESIS

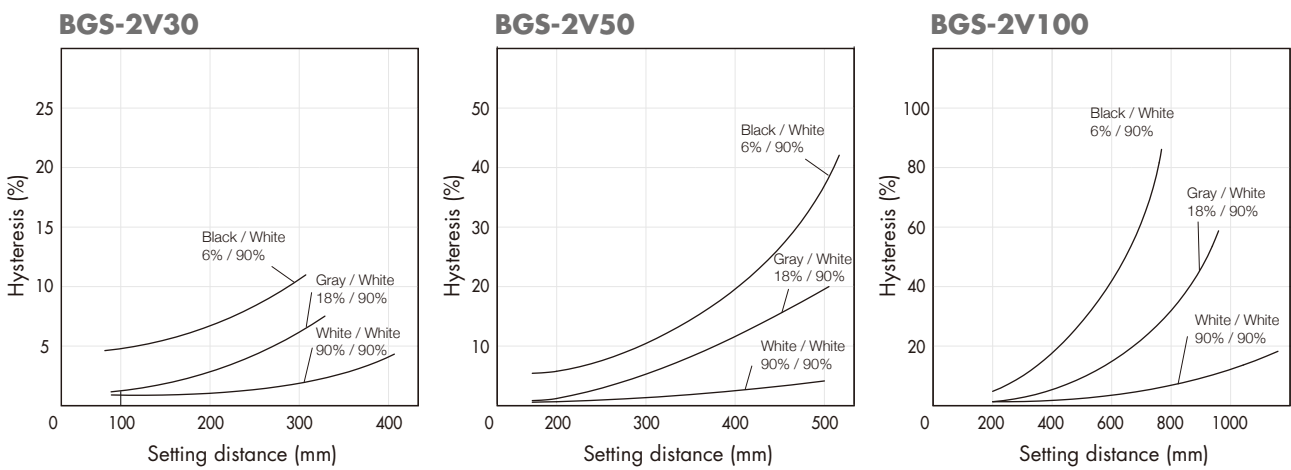


Options


Standard reflector V-61

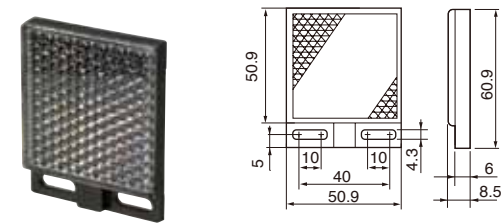

Small reflector V-42

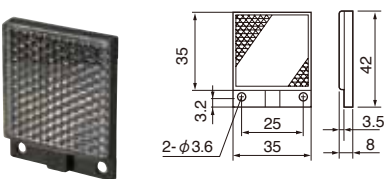

M12 connector cable
DOL-1204-G02M

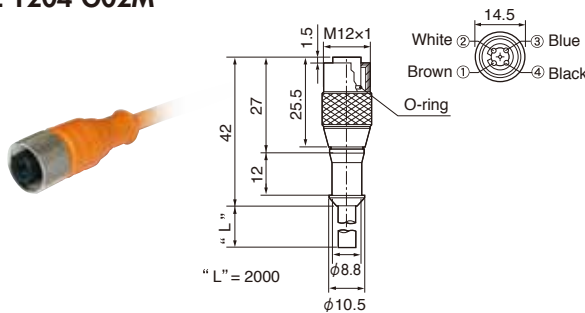

(Unit : mm)