



TFT LCD Approval Specification

MODEL NO.: V470H1 – LH3

Customer: _____

Approved by: _____

Note:

Approved By	TV Head Division	
	LY Chen	

Reviewed By	QRA Dept.	Product Development Div.
	Tomy Chen	WT Lin

Prepared By	LCD TV Marketing and Product Management Div.	
	Ken Wu	HT Hung

CONTENTS

REVISION HISTORY	4
1. GENERAL DESCRIPTION	5
1.1 OVERVIEW	5
1.2 FEATURES	5
1.3 APPLICATION.....	5
1.4 GENERAL SPECIFICATIONS	5
1.5 MECHANICAL SPECIFICATIONS	6
2. ABSOLUTE MAXIMUM RATINGS	7
2.1 ELECTRICAL ABSOLUTE RATINGS.....	7
2.1.1 TFT LCD MODULE.....	7
2.2 ABSOLUTE RATINGS OF ENVIRONMENT.....	7
2.3 RELIABILITY TEST CONDITION.....	8
3. ELECTRICAL CHARACTERISTICS	9
3.1 TFT LCD MODULE.....	9
3.2 BACKLIGHT CONNECTOR PIN CONFIGURATION.....	10
3.2.1 LAMP SPECIFICATION.....	10
3.2.2 ELECTRICAL SPECIFICATION.....	11
4. BLOCK DIAGRAM OF INTERFACE	12
4.1 TFT LCD MODULE.....	12
5. INPUT TERMINAL PIN ASSIGNMENT	13
5.1 TFT LCD Module Input	13
5.2 BACKLIGHT UNIT	16
5.3 BLOCK DIAGRAM OF INTERFACE	17
5.4 LVDS INTERFACE	19
5.5 COLOR DATA INPUT ASSIGNMENT.....	20
6. INTERFACE TIMING.....	21
6.1 INPUT SIGNAL TIMING SPECIFICATIONS.....	21
6.2 POWER ON/OFF SEQUENCE.....	23
7. OPTICAL CHARACTERISTICS.....	24

**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date:Dec.26.2007

Model No.: V470H1-LH3

Preliminary

7.1 TEST CONDITIONS	24
7.2 OPTICAL SPECIFICATIONS	25
8. PRECAUTIONS	28
8.1 ASSEMBLY AND HANDLING PRECAUTIONS	28
8.2 SAFETY PRECAUTIONS	28
9. DEFINITION OF LABELS.....	29
9.1 CMO MODULE LABEL.....	29
10. PACKAGING	30
10.1 PACKAGING SPECIFICATIONS.....	30
10.2 PACKAGING METHOD	30
11. MECHANICAL CHARACTERISTICS	32

**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date:Dec.26.2007

Model No.: V470H1-LH3

Preliminary**REVISION HISTORY**

Version	Date	Page (New)	Section	Description
Ver.1.0	Dec, 26,'07	All	All	Preliminary Specification was first issued.

1. GENERAL DESCRIPTION

1.1 OVERVIEW

V470H1-LH3 is a 47" TFT Liquid Crystal Display module with 20-CCFL Backlight unit and 4ch-LVDS interface. This module supports 1920 x 1080 Full HDTV format and can display true 1.0G colors (10-bit/color). The inverter module for backlight isn't built-in.

1.2 FEATURES

- High brightness (500 nits)
- High contrast ratio (2000:1)
- Fast response time (Gray to gray average 4.0 ms)
- High color saturation (NTSC 72%)
- Full HDTV (1920 x 1080 pixels) resolution, true HDTV format
- DE (Data Enable) only mode
- LVDS (Low Voltage Differential Signaling) interface
- Optimized response time for 100 Hz frame rate
- Ultra wide viewing angle : Super MVA technology
- RoHS compliance

1.3 APPLICATION

- Standard Living Room TVs.
- Public Display Application.
- Home Theater Application.
- MFM Application.

1.4 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Active Area	1039.68(H) x 584.82 (V) (47" diagonal)	mm	(1)
Bezel Opening Area	1049 (H) x 593 (V)	mm	
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1920 x R.G.B. x 1080	pixel	-
Pixel Pitch(Sub Pixel)	0.5415 (H) x 0.1805 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	1.0G	color	-
Display Operation Mode	Transmissive mode / Normally black	-	-
Surface Treatment	Anti-Glare coating / 3H	-	(2)

Note (1) Please refer to the attached drawings in chapter 9 for more information about the front and back outlines.

Note (2) The spec. of the surface treatment is temporarily for this phase. CMO reserves the rights to change this feature.

**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date:Dec.26.2007

Model No.: V470H1-LH3

Preliminary**1.5 MECHANICAL SPECIFICATIONS**

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	1094.5	1096.0	1097.5	mm	(1), (2)
	Vertical (V)	638.0	640.0	641.5	mm	
	Depth (D)	47.1	48.1	49.1	mm	
Weight		-	14750	-	g	-

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Note (2) Module Depth does not include connectors.

2. ABSOLUTE MAXIMUM RATINGS

2.1 ELECTRICAL ABSOLUTE RATINGS

2.1.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCC	-0.3	13.2	V	
Logic Input Voltage	VIN	-0.3	3.6	V	

2.2 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	TST	-20	+60	°C	(1)
Operating Ambient Temperature	TOP	0	50	°C	(1), (2)
Shock (Non-Operating)	SNOP	-	50	G	(3), (5)
Vibration (Non-Operating)	VNOP	-	1.0	G	(4), (5)

Note (1) Temperature and relative humidity range is shown in the figure below.

(a) 90 %RH Max. ($T_a \leq 40^\circ\text{C}$).

(b) Wet-bulb temperature should be 39°C Max. ($T_a > 40^\circ\text{C}$).

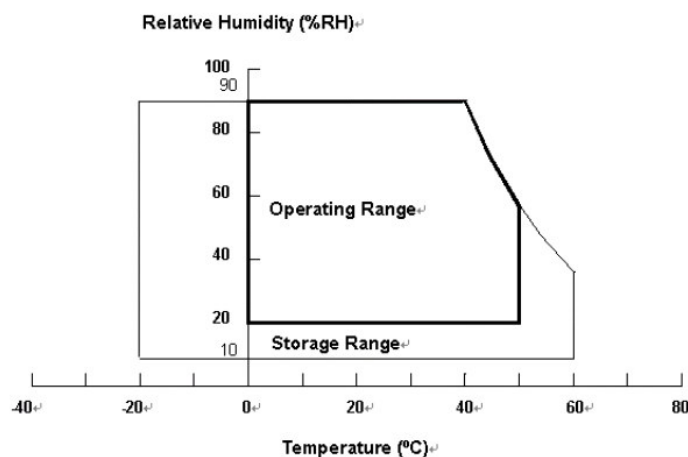
(c) No condensation.

Note (2) The maximum operating temperature is based on the test condition that the surface temperature of display area is less than or equal to 65°C with LCD module alone in a temperature controlled chamber. Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 65°C . The range of operating temperature may degrade in case of improper thermal management in final product design.

Note (3) 11 ms, half sine wave, 1 time for $\pm X$, $\pm Y$, $\pm Z$.

Note (4) 10 ~ 200 Hz, 10 min, 1 time each X, Y, Z.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.



**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date:Dec.26.2007

Model No.: V470H1-LH3

Preliminary**2.3 RELIABILITY TEST CONDITION**

No	Test Item	Codition
1	High temperature storage test	Ta = 60℃, 240hrs
2	Low temperature storage test	Ta = -20℃, 240hrs
3	High temperature high humidity storage test	Ta = 50℃, 90%RH, 240hrs
4	High temperature operation test	Ta = 50℃, 240hrs
5	Low temperature operation test	Ta = 0℃, 240hrs
6	High temperature high humidity operation test	Ta = 50℃, 80%RH, 240hrs
7	Vibration test (non-operation)	Wave form: Sine wave Vibration level: 1.0G Fre. range : 10~200Hz Duration: X, Y, Z, 10min, One time each direction
8	Shock test (non-operation)	Wave form: half sine wave Shock level: 50G ±X, ±Y, ± Z, 11ms One time each direction

3. ELECTRICAL CHARACTERISTICS


3.1 TFT LCD MODULE


(Ta = 25 ± 2 °C)

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		VCC	10.8	12	13.2	V	(1)
Power Supply Ripple Voltage		VRP	-	-	350	mV	
Rush Current		IRUSH	-	-	7.5	A	(2)
Power Supply Current	White Pattern	-	-	2.5	3.0	A	(3)
	Mosaic Pattern	-	-	1.5	-	A	
	Black Pattern	-	-	1.9	-	A	
LVDS Interface	Differential Input High Threshold Voltage	VLVTH	-	-	100	mV	
	Differential Input Low Threshold Voltage	VLVTL	-100	-	-	mV	
	Common Input Voltage	VLVC	1.125	1.25	1.375	V	
	Terminating Resistor	RT	-	100	-	ohm	
CMOS interface	Input High Threshold Voltage	VIH	2.7	-	3.3	V	
	Input Low Threshold Voltage	VIL	0	-	0.7	V	

Note (1) The module should be always operated within the above ranges.

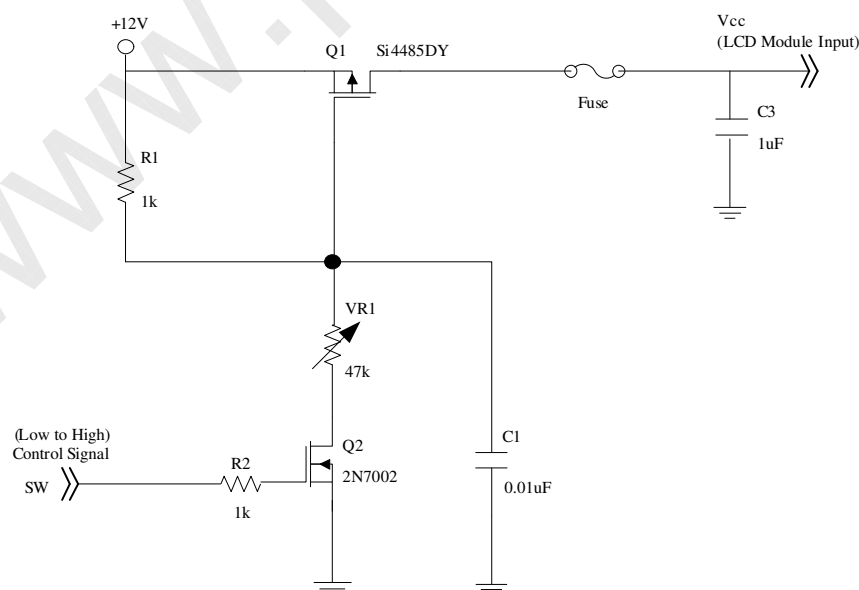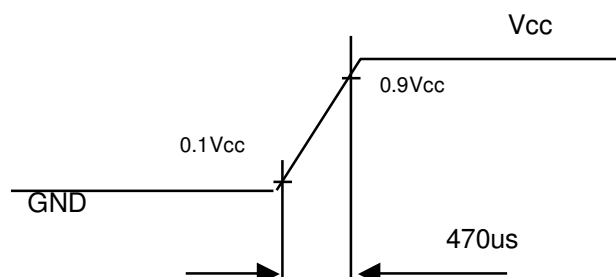Note (2) The duration of rush current is about 2ms and measurement condition is shown below:



Vcc rising time is 470us

Note (3) The specified power supply current is under the conditions at $V_{cc} = 12\text{ V}$, $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$, $f_v = 120\text{ Hz}$, whereas a power dissipation check pattern below is displayed.

a. White Pattern



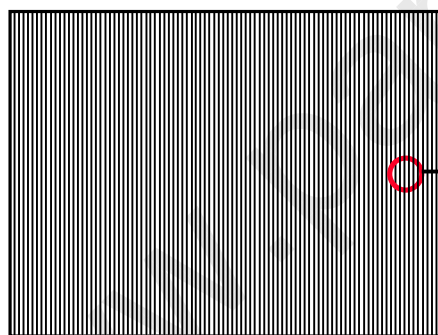
Active Area

b. Black Pattern




Active Area

c. Vertical Stripe Pattern



Active Area

**3.2 BACKLIGHT CONNECTOR PIN CONFIGURATION****3.2.1 LAMP SPECIFICATION**

($T_a = 25 \pm 2\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Lamp Starting Voltage	VSL	-	-	2370	VRMS	$T_a = 0\text{ }^{\circ}\text{C}$
		-	-	2160	VRMS	$T_a = 25\text{ }^{\circ}\text{C}$
Lamp Voltage	VL	1368	1520	1672	VRMS	
Lamp Current	IL	5.5	6.0	6.5	mARMS	

Lamp Frequency	FL	40	-	80	KHz	
Lamp Life Time	LBL	50,000	60,000	-	Hrs	(1)

Note(1) Condition: PWM 100% dimming duty ratio

3.2.2 ELECTRICAL SPECIFICATION

(Ta = 25 ± 2 °C)


Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
BL Lamp Voltage	VBL	1032	1147	1262	VRMS	(1)
BL Lamp Current	IBL	115	125	135	mARMS	20 lamps
Oscillating Frequency	FW	43	45	47	KHz	
PWM Dimming Range	PDIM	20	-	100	%	(2)
Striking Time	ST	-	-	2	Sec	
Lamp Type	-	Straight Type			-	
Number of Lamps	-	20			PCS	
Type of Current Balance	-	C-Balance			-	
C Ballaster	CB	-	22	-	pF	

Note (1) Single size: Half lamp voltage + capacitor voltage

Note (2) V470H1-LH3 are designed without Inverter. These items are for reference and based on V470H1-L03 Inverter model.

4. BLOCK DIAGRAM OF INTERFACE

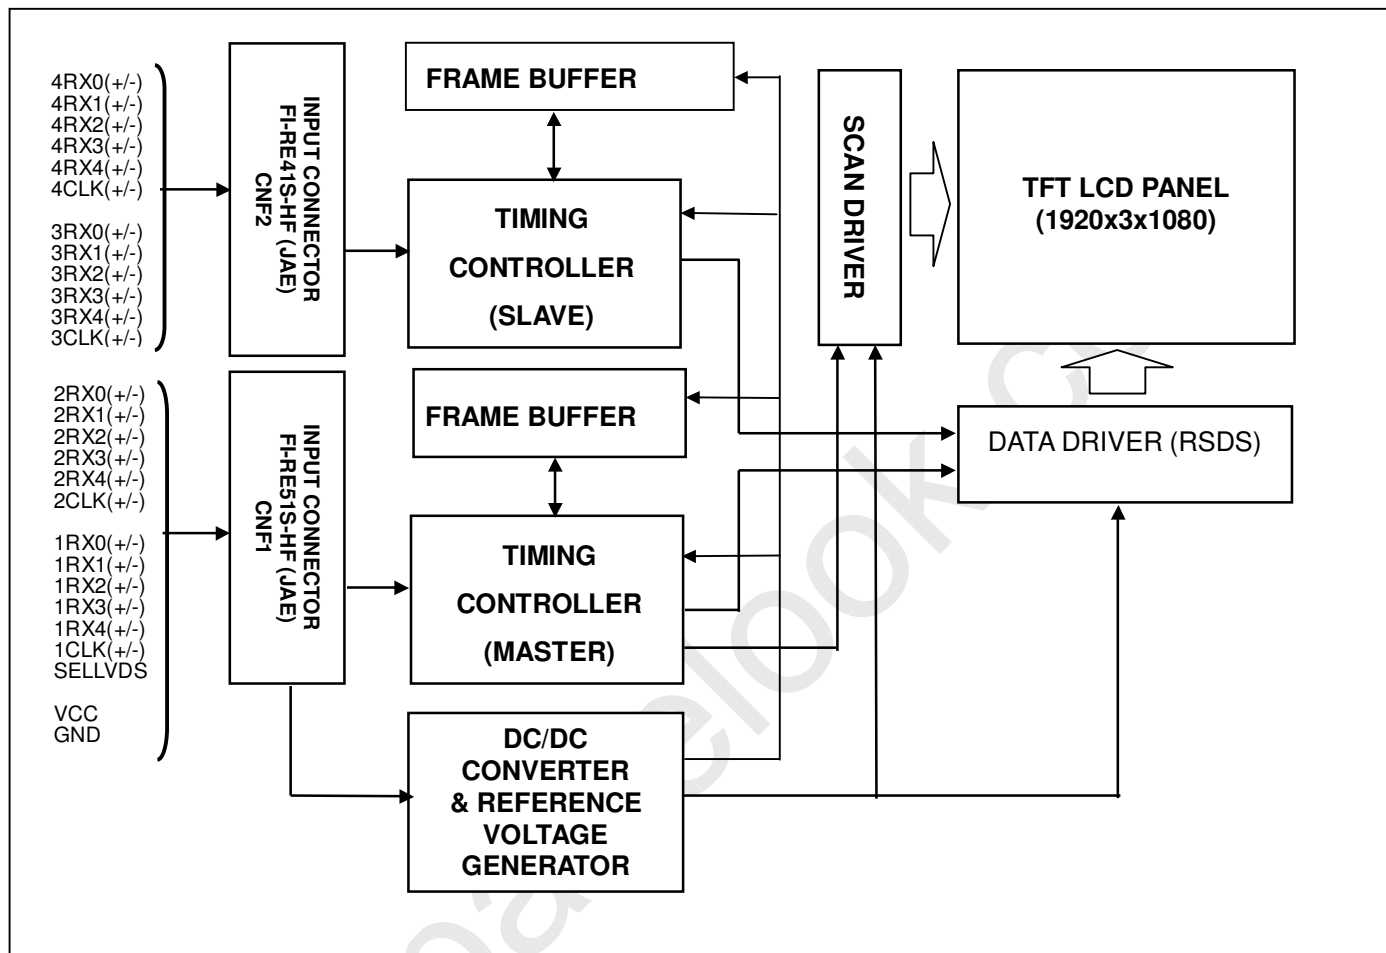4.1 TFT LCD MODULE



5. INPUT TERMINAL PIN ASSIGNMENT

5.1 TFT LCD Module Input

CNF1 Connector Pin Assignment(FI-RE51S-HF (JAE) or equivalent)

Pin	Name	Description	Note
1	GND	Ground	
2	N.C.	No Connection	(1)
3	N.C.	No Connection	(1)
4	N.C.	No Connection	(1)
5	N.C.	No Connection	(1)
6	N.C.	No Connection	(1)
7	SELLVDS	LVDS data format Selection	(2)
8	N.C.	No Connection	(1)
9	N.C.	No Connection	(1)
10	N.C.	No Connection	(1)
11	GND	Ground	
12	RxAo-	First pixel, Negative LVDS differential data input. Channel 0	(4)
13	RxAo+	First pixel, Positive LVDS differential data input. Channel 0	
14	RxB0-	First pixel, Negative LVDS differential data input. Channel 1	
15	RxB0+	First pixel, Positive LVDS differential data input. Channel 1	
16	RxC0-	First pixel, Negative LVDS differential data input. Channel 2	
17	RxC0+	First pixel, Positive LVDS differential data input. Channel 2	
18	GND	Ground	
19	RxC1ko-	First pixel, Negative LVDS differential clock input.	
20	RxC1ko+	First pixel, Positive LVDS differential clock input.	
21	GND	Ground	
22	RxD0-	First pixel, Negative LVDS differential data input. Channel 3	(4)
23	RxD0+	First pixel, Positive LVDS differential data input. Channel 3	
24	RxE0-	First pixel, Negative LVDS differential data input. Channel 4	
25	RxE0+	First pixel, Positive LVDS differential data input. Channel 4	
26	NC	No Connection	(1)
27	NC	No Connection	(1)
28	RxAe-	Second pixel, Negative LVDS differential data input. Channel 0	(4)
29	RxAe+	Second pixel, Positive LVDS differential data input. Channel 0	
30	RxB0-	Second pixel, Negative LVDS differential data input. Channel 1	
31	RxB0+	Second pixel, Positive LVDS differential data input. Channel 1	
32	RxCe-	Second pixel, Negative LVDS differential data input. Channel 2	
33	RxCe+	Second pixel, Positive LVDS differential data input. Channel 2	
34	GND	Ground	
35	RxC1ke-	Second pixel, Negative LVDS differential clock input.	
36	RxC1ke+	Second pixel, Positive LVDS differential clock input.	
37	GND	Ground	
38	RxD0-	Second pixel, Negative LVDS differential data input. Channel 3	(4)
39	RxD0+	Second pixel, Positive LVDS differential data input. Channel 3	
40	RxE0-	Second pixel, Negative LVDS differential data input. Channel 4	
41	RxE0+	Second pixel, Positive LVDS differential data input. Channel 4	
42	GND	Ground	
43	GND	Ground	
44	GND	Ground	
45	GND	Ground	
46	GND	Ground	
47	NC	No Connection	
48	Vin	Power input (+12V)	

49	Vin	Power input (+12V)	
50	Vin	Power input (+12V)	
51	Vin	Power input (+12V)	

CNF2 Connector Pin Assignment (FI-RE41S-HF (JAE) or equivalent)

Pin	Name	Description	Note
1	GND	Ground	
2	N.C.	No Connection	(1)
3	N.C.	No Connection	(1)
4	N.C.	No Connection	(1)
5	N.C.	No Connection	(1)
6	N.C.	No Connection	(1)
7	NC	No Connection	(1)
8	N.C.	No Connection	(1)
9	GND	Ground	
10	RxAo-	Third pixel, Negative LVDS differential data input. Channel 0	(4)
11	RxAo+	Third pixel, Positive LVDS differential data input. Channel 0	
12	RxB0-	Third pixel, Negative LVDS differential data input. Channel 1	
13	RxB0+	Third pixel, Positive LVDS differential data input. Channel 1	
14	RxC0-	Third pixel, Negative LVDS differential data input. Channel 2	
15	RxC0+	Third pixel, Positive LVDS differential data input. Channel 2	
16	GND	Ground	
17	RxC1ko-	Third pixel, Negative LVDS differential clock input.	
18	RxC1ko+	Third pixel, Positive LVDS differential clock input.	
19	GND	Ground	
20	RxD0-	Third pixel, Negative LVDS differential data input. Channel 3	
21	RxD0+	Third pixel, Positive LVDS differential data input. Channel 3	
22	RxE0-	Third pixel, Negative LVDS differential data input. Channel 4	
23	RxE0+	Third pixel, Positive LVDS differential data input. Channel 4	
24	NC	No Connection	(1)
25	NC	No Connection	(1)
26	RxAe-	Fourth pixel, Negative LVDS differential data input. Channel 0	(4)
27	RxAe+	Fourth pixel, Positive LVDS differential data input. Channel 0	
28	RxBe-	Fourth pixel, Negative LVDS differential data input. Channel 1	
29	RxBe+	Fourth pixel, Positive LVDS differential data input. Channel 1	
30	RxCe-	Fourth pixel, Negative LVDS differential data input. Channel 2	
31	RxCe+	Fourth pixel, Positive LVDS differential data input. Channel 2	
32	GND	Ground	
33	RxC1ke-	Fourth pixel, Negative LVDS differential clock input.	
34	RxC1ke+	Fourth pixel, Positive LVDS differential clock input.	
35	GND	Ground	
36	RxD0-	Fourth pixel, Negative LVDS differential data input. Channel 3	(4)
37	RxD0+	Fourth pixel, Positive LVDS differential data input. Channel 3	
38	RxE0-	Fourth pixel, Negative LVDS differential data input. Channel 4	
39	RxE0+	Fourth pixel, Positive LVDS differential data input. Channel 4	
40	N.C.	No Connection	(1)
41	N.C.	No Connection	(1)

Note (1) Please be reserved to open.

Note (2) Low or Open : VESA LVDS Format (default), High : JEIDA Format.

Note (3) Low =Open or Connect to GND, High = Connect to +3.3V

Note (4) LVDS 4-Port Data Mapping

**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date:Dec.26.2007

Model No.: V470H1-LH3


Preliminary

Port	CH of LVDS	Data Stream
1st Port	First pixel	1, 5, 9,, 1913, 1917
2nd Port	Second pixel	2, 6, 10,, 1914, 1918
3rd Port	Third pixel	3, 7, 11,, 1915, 1919
4th Port	Fourth pixel	4, 8, 12,, 1916, 1920


5.2 BACKLIGHT UNIT

CN1-CN2: 65002WR-03.

Pin	Symbol	Description
1	H.V.	High Voltage for Backlight Unit
2	H.V.	High Voltage for Backlight Unit
3	N.C.	No Connection

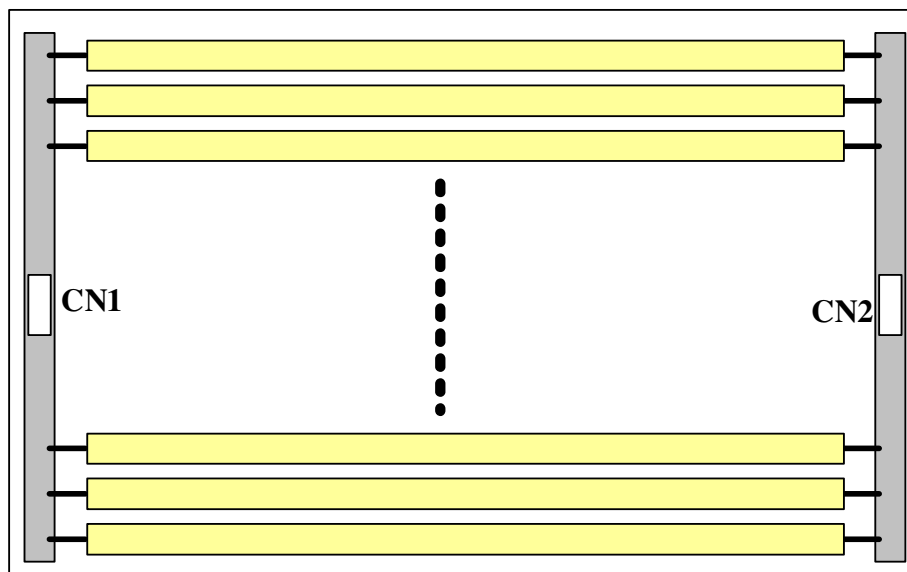

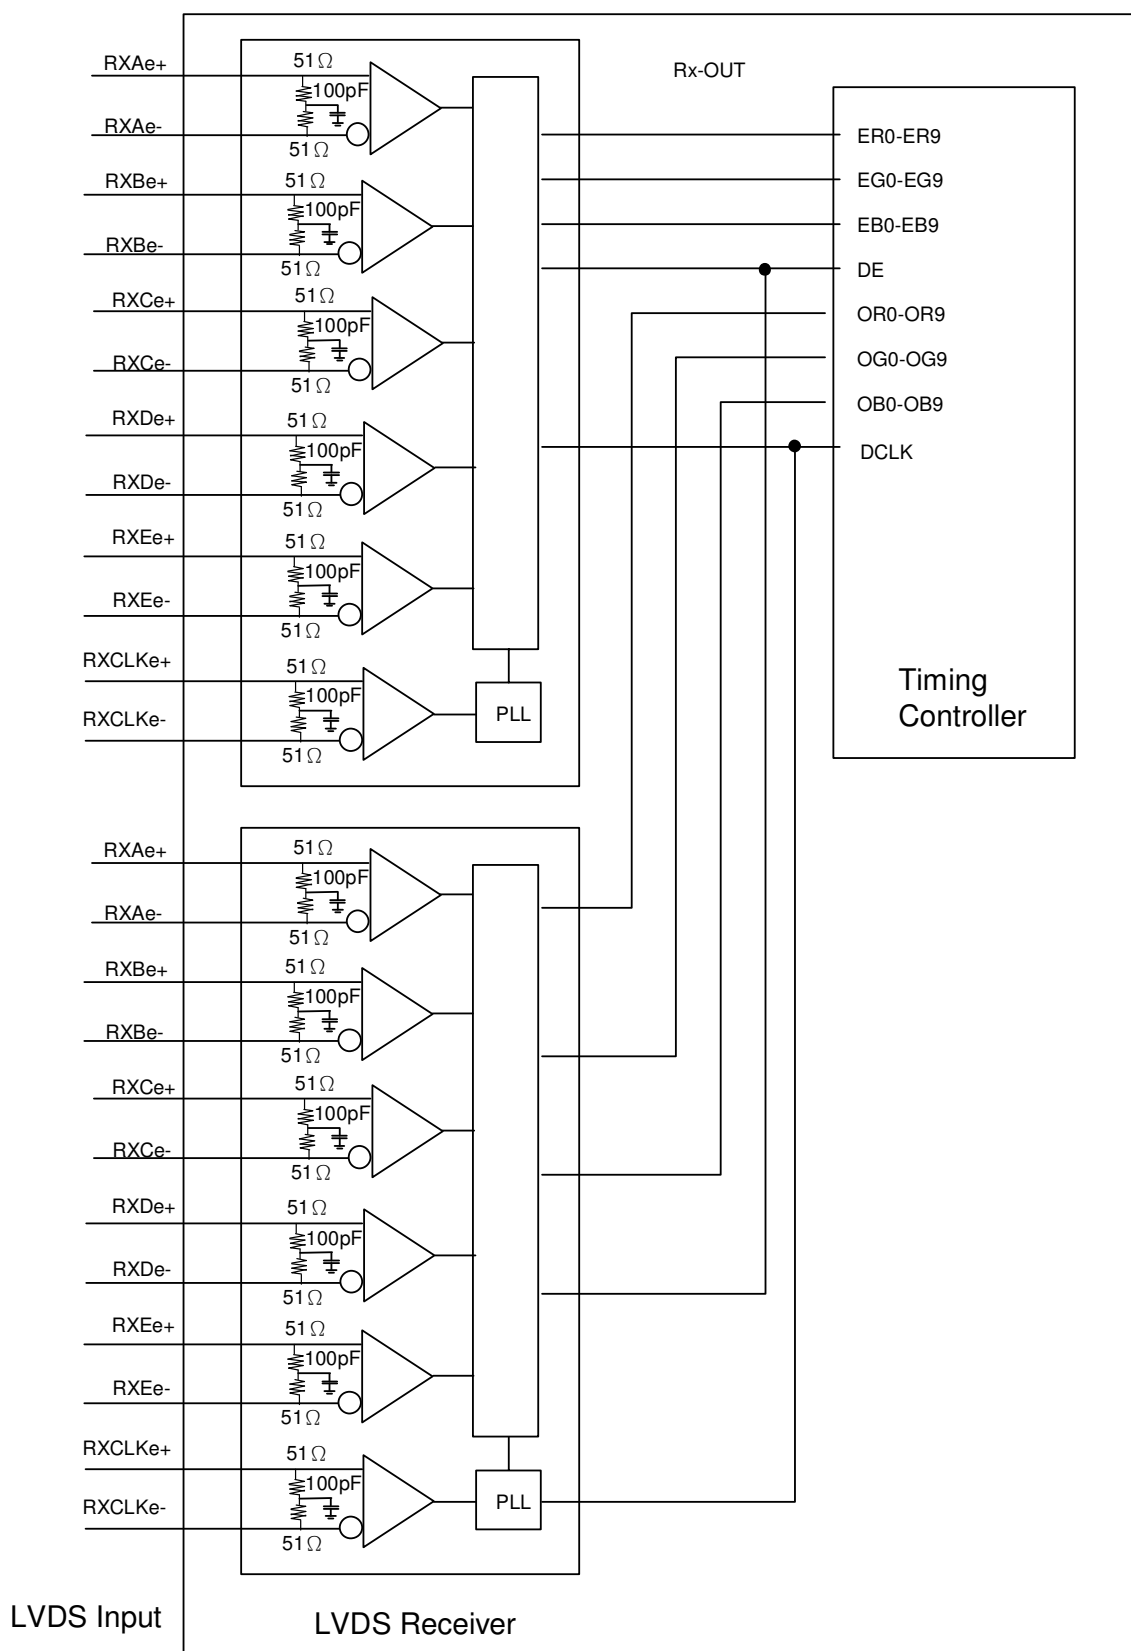5.3 BLOCK DIAGRAM OF INTERFACE





CHI MEI
OPTOELECTRONICS CORP.

Issue Date: Dec. 26. 2007

Model No.: V470H1-LH3

Preliminary

ER0~ER9 : Even pixel R data

EG0~EG9 : Even pixel G data

EB0~EB9 : Even pixel B data

OR0~OR9 : Odd pixel R data

OG0~OG9 : Odd pixel G data

OB0~OB9 : Odd pixel B data

DE : Data enable signal

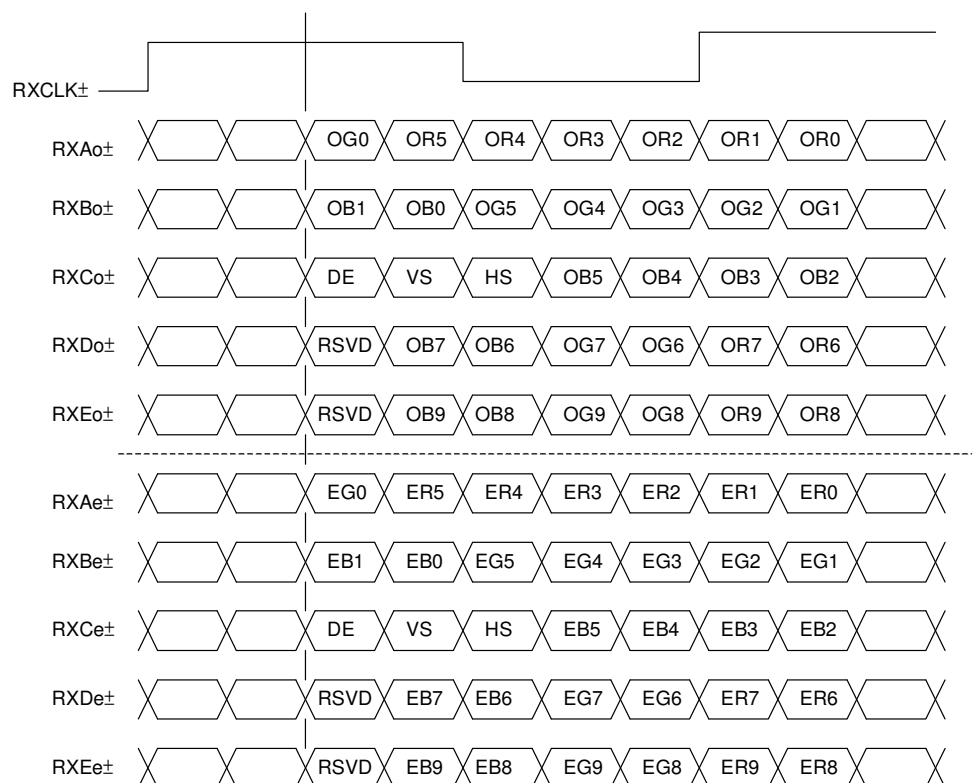
DCLK : Data clock signal

Notes: (1) The system must have the transmitter to drive the module.


(2) LVDS cable impedance shall be 50 ohms per signal line or about 100 ohms per twist-pair line when it is used differentially.

5.4 LVDS INTERFACE

SELLVDS = L or Open



SELLVDS = H

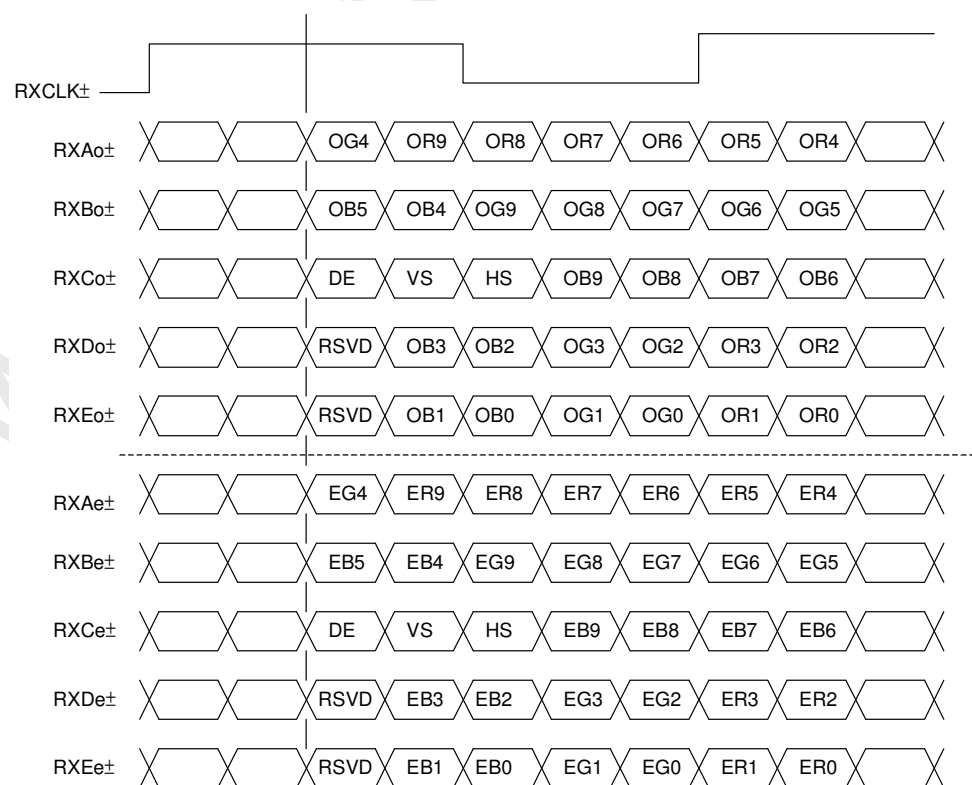

R0~R9: Pixel R Data (9; MSB, 0; LSB)

G0~G9: Pixel G Data (9; MSB, 0; LSB)

B0~B9: Pixel B Data (9; MSB, 0; LSB)

DE : Data enable signal

DCLK : Data clock signal

RSVD_: Reserved.

5.5 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 10-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of the color versus data input.

Color		Data Signal																													
		Red										Green										Blue									
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (1)	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (2)	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red (1021)	1	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (1022)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Red (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Green	Green (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	Green (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green (1021)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0
	Green (1022)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0
Green (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Blue	Blue (0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue (2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue (1021)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	1
	Blue (1022)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0
Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	

Note (1) 0: Low Level Voltage, 1: High Level Voltage

6. INTERFACE TIMING


6.1 INPUT SIGNAL TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Receiver Clock	Frequency	$1/T_c$	60	74.25	80	MHz	$\approx 297/4$
	Input cycle to cycle jitter	Trcl	-	-	200	ps	-
LVDS Receiver Data	Setup Time	Tlvsu	600	-	-	ps	
	Hold Time	Tlvhd	600	-	-	ps	
Vertical Active Display Term	Frame Rate	Fr		120		Hz	
	Total	Tv	1115	1125	1139	Th	$T_v = T_{vd} + T_{vb}$
	Display	Tvd	1080	1080	1080	Th	-
	Blank	Tvb	35	45	59	Th	-
Horizontal Active Display Term	Total	Th	540	550	575	Tc	$T_h = T_{hd} + T_{hb}$
	Display	Thd	480	480	480	Tc	-
	Blank	T hb	45	70	95	Tc	-

Note (1) Since the module is operated in DE only mode, Hsync and Vsync input signals should be set to low logic level. Otherwise, this module would operate abnormally..

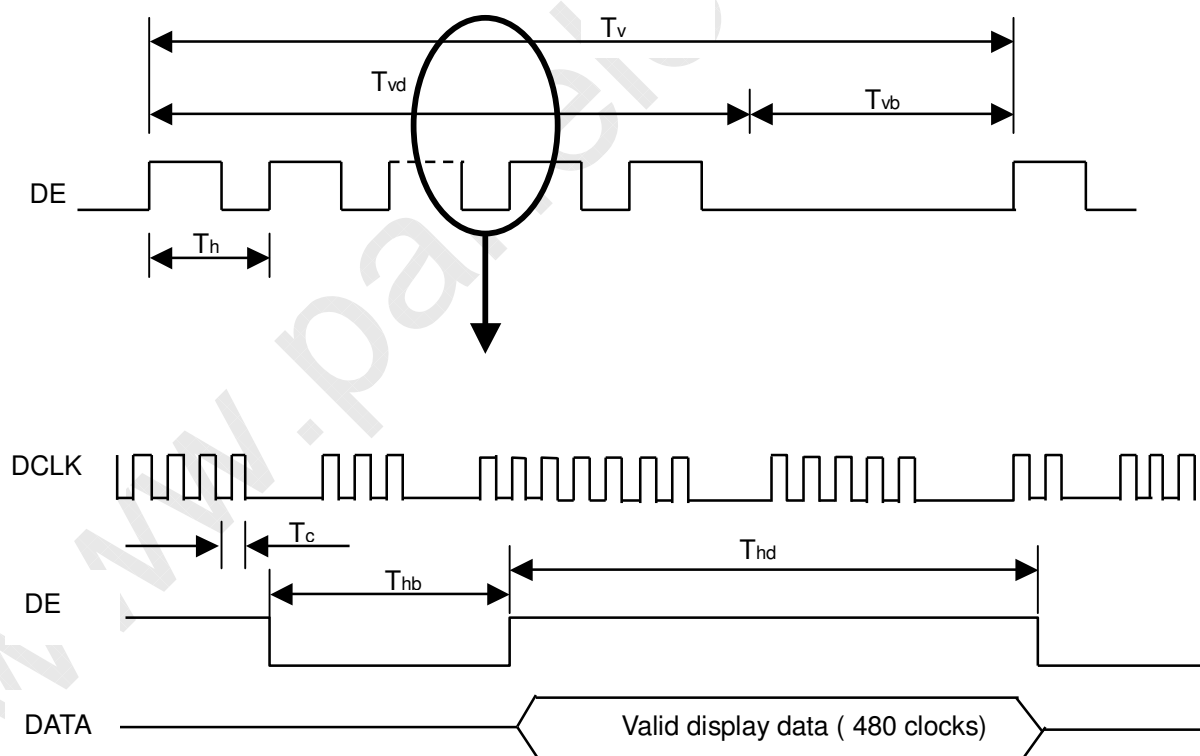INPUT SIGNAL TIMING DIAGRAM






CHI MEI
OPTOELECTRONICS CORP.

Issue Date: Dec. 26. 2007

Model No.: V470H1-LH3


Preliminary

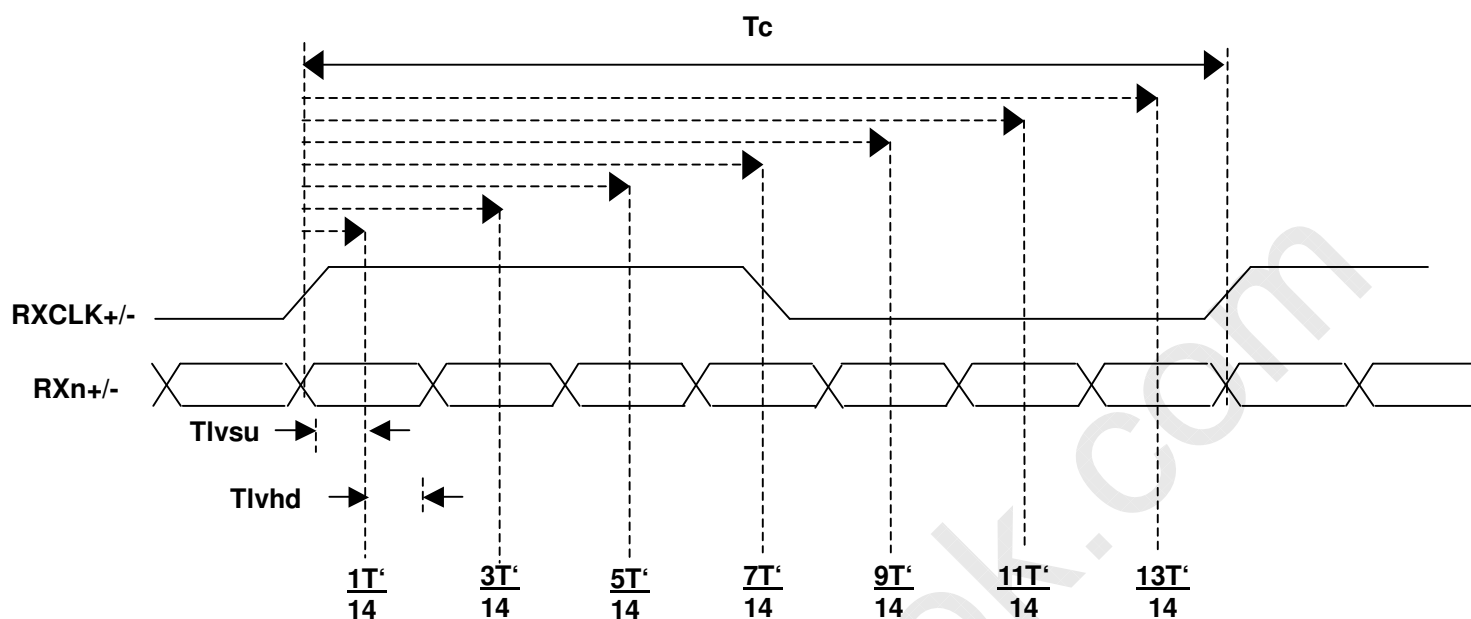LVDS INPUT INTERFACE TIMING DIAGRAM



6.2 POWER ON/OFF SEQUENCE

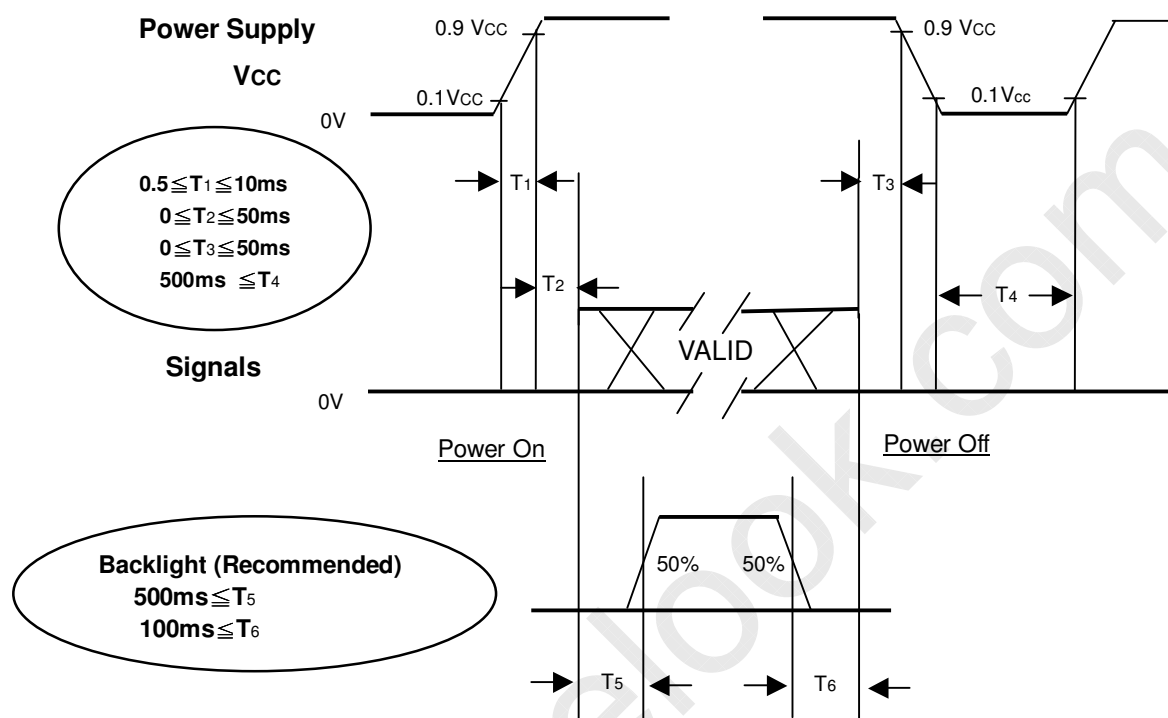To prevent a latch-up or DC operation of LCD module, the power on/off sequence should follow the diagram below.



Power ON/OFF Sequence

Note.

- (1) The supply voltage of the external system for the module input should follow the definition of Vcc.
- (2) Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.
- (3) In case of VCC is in off level, please keep the level of input signals on the low or high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.


Interface signal shall not be kept at high impedance when the power is on.

7. OPTICAL CHARACTERISTICS

7.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	VCC	12	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
Lamp Current	IL	125±10	mA
Oscillating Frequency (Inverter)	FW	45±2	KHz
Vertical Frame Rate	Fr	100	Hz

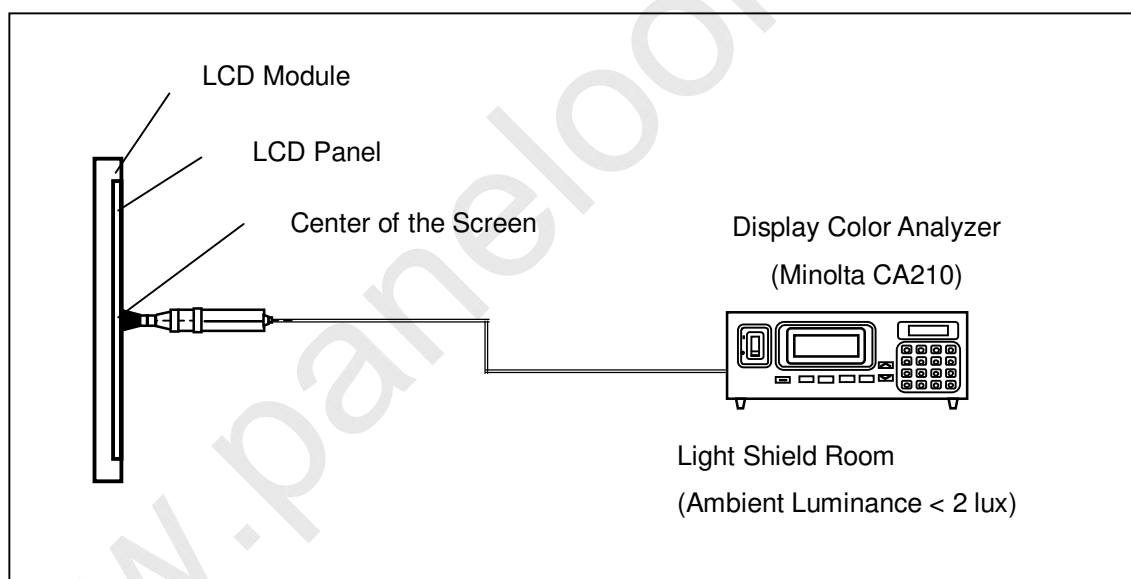The LCD module should be stabilized at given temperature for 1 hour to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 1 hour in a windless room.




7.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown in 7.2. The following items should be measured under the test conditions described in 7.1 and stable environment shown in Note (6).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta x = 0^\circ, \theta y = 0^\circ$ Viewing angle at normal direction	(1800)	(2000)		-	Note (2)
Response Time		Gray to gray			(4.0)	(8.0)	ms	Note (3)
Center Luminance of White		LC		(400)	(500)		cd/m ₂	Note (4)
White Variation		δW				(1.3)	-	Note (7)
Cross Talk		CT				(4)	%	Note (5)
Color Chromaticity	Red	Rx		Typ. -0.03	(0.638)	Typ. +0.03	-	Note (6)
		Ry			(0.331)		-	
	Green	Gx			(0.268)		-	
		Gy			(0.593)		-	
	Blue	Bx			(0.143)		-	
		By			(0.068)		-	
	White	Wx			(0.280)		-	
		Wy			(0.285)		-	
	Color Gamut		C.G		(70)	(72)	%	NTSC
Viewing Angle	Horizontal	$\theta x +$	$CR \geq 20$	80	88		Deg.	Note (1)
		$\theta x -$		80	88			
	Vertical	$\theta y +$		80	88			
		$\theta y -$		80	88			

Note (1) Definition of Viewing Angle ($\theta x, \theta y$):

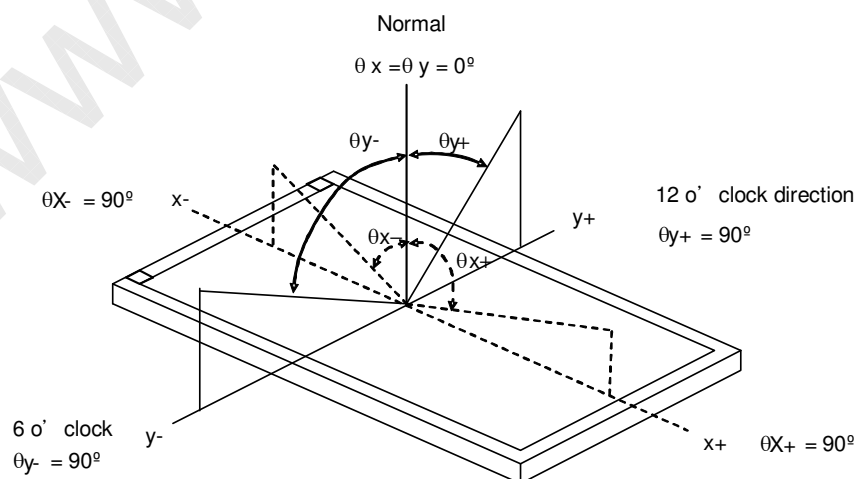Viewing angles are measured by Eldim EZ-Contrast 160R



Note (2) Definition of Contrast Ratio (CR):

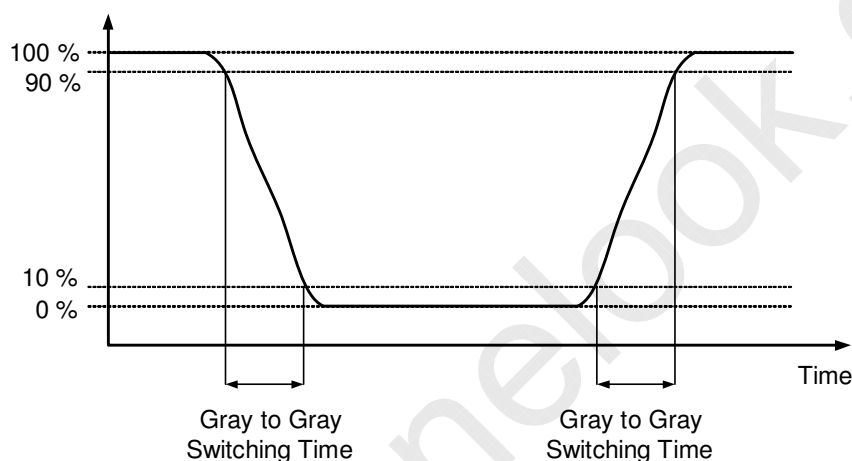
The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

CR = CR (5), where CR (X) is corresponding to the Contrast Ratio of the point X at the figure in Note (7).

Note (3) Definition of Gray-to-Gray Switching Time:

Optical Response



The driving signal means the signal of luminance 0%, 20%, 40%, 60%, 80%, 100%.

Gray to gray average time means the average switching time of luminance 0%, 20%, 40%, 60%, 80%, 100% to each other.

Note (4) Definition of Luminance of White (LC, LAVE):

Measure the luminance of gray level 255 at center point and 5 points

LC = L (5), where L (X) is corresponding to the luminance of the point X at the figure in Note (7).

Note (5) Definition of Cross Talk (CT):

$$\text{CT} = |YB - YA| / YA \times 100 (\%)$$

Where:

YA = Luminance of measured location without gray level 0 pattern (cd/m²)

YB = Luminance of measured location with gray level 0 pattern (cd/m²)

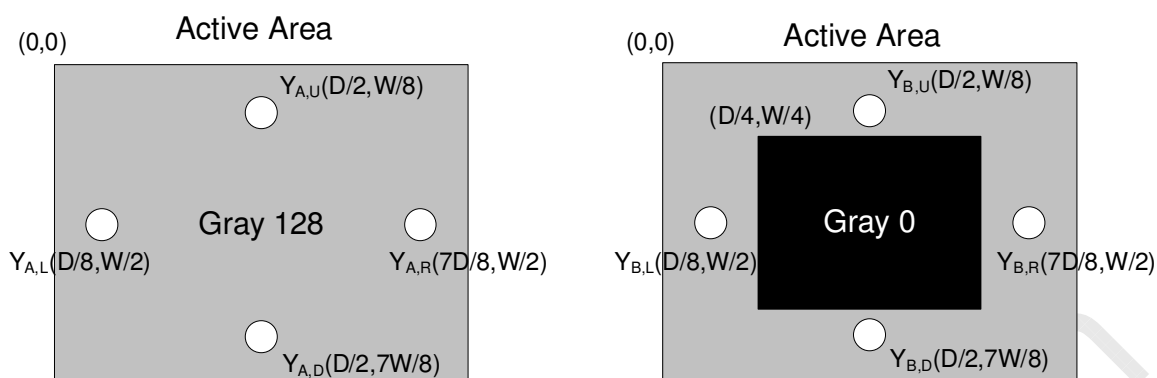


CHI MEI
OPTOELECTRONICS CORP.

Issue Date: Dec. 26. 2007

Model No.: V470H1-LH3


Preliminary



Note (7) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 5 points
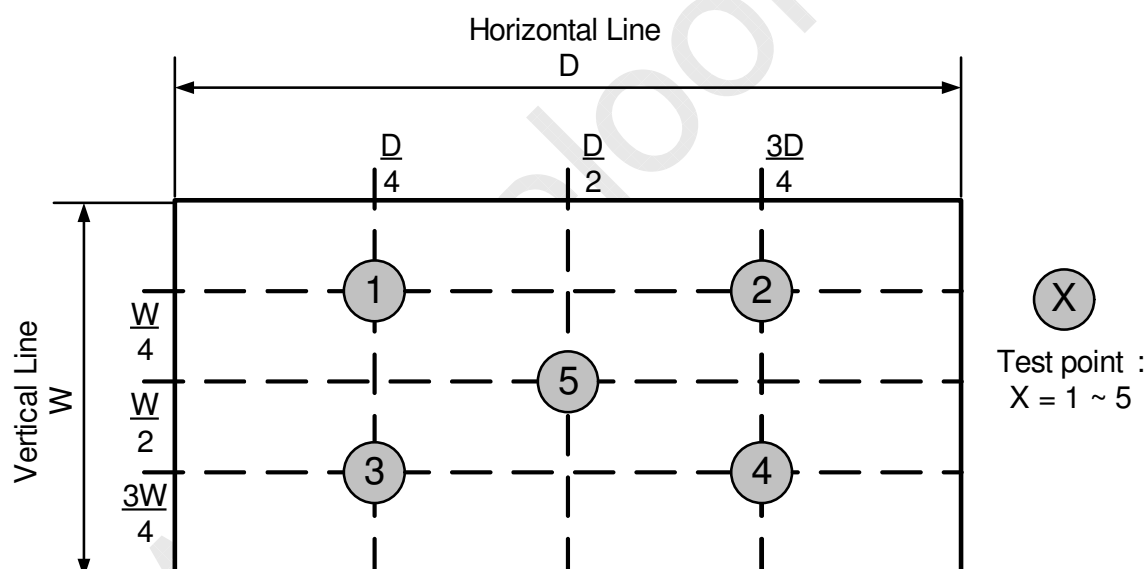
$$\delta W = \text{Maximum} [L(1), L(2), L(3), L(4), L(5)] / \text{Minimum} [L(1), L(2), L(3), L(4), L(5)]$$



8. PRECAUTIONS

8.1 ASSEMBLY AND HANDLING PRECAUTIONS

- [1] Do not apply rough force such as bending or twisting to the module during assembly.
- [2] It is recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- [3] Do not apply pressure or impulse to the module to prevent the damage of LCD panel and Backlight.
- [4] Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.
- [5] Do not plug in or pull out the I/F connector while the module is in operation.
- [6] Do not disassemble the module.
- [7] Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- [8] Moisture can easily penetrate into LCD module and may cause the damage during operation.
- [9] When storing modules as spares for a long time, the following precaution is necessary.
 - [9.1] Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35°C at normal humidity without condensation.
 - [9.2] The module shall be stored in dark place. Do not store the TFT-LCD module in direct sunlight or fluorescent light.
- [10] When ambient temperature is lower than 10°C, the display quality might be reduced. For example, the response time will become slow, and the starting voltage of CCFL will be higher than that of room temperature.

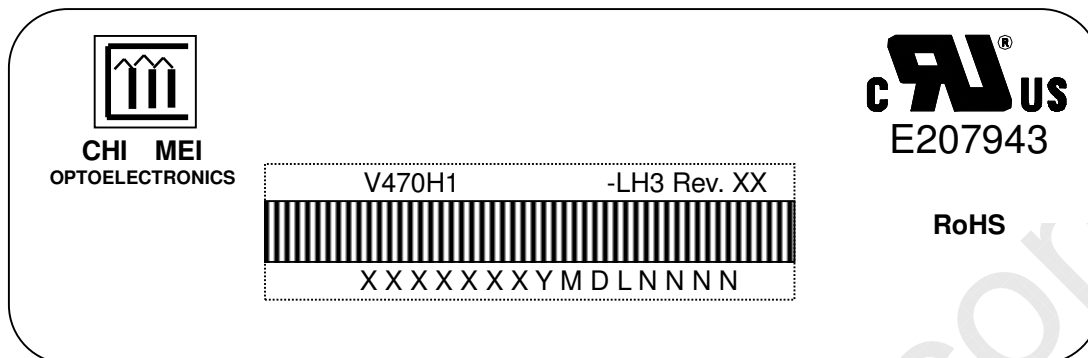
8.2 SAFETY PRECAUTIONS

- [1] The startup voltage of a Backlight is approximately 1000 Volts. It may cause an electrical shock while assembling with the inverter. Do not disassemble the module or insert anything into the Backlight unit.
- [2] If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- [3] After the module's end of life, it is not harmful in case of normal operation and storage.

9. DEFINITION OF LABELS

9.1 CMO MODULE LABEL


The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



Model Name: V470H1-LH3

Revision: Rev. XX, for example: A0, A1... B1, B2... or C1, C2...etc.

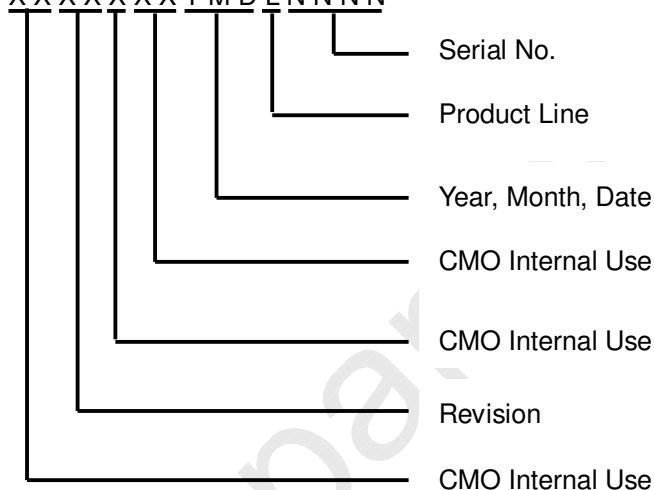Serial ID: XXXXXYYMDLNNNN



Serial ID includes the information as below:

Manufactured Date:

Year: 0~9, for 2000~2009

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I, O, and U.

Revision Code: Cover all the change

Serial No.: Manufacturing sequence of product

Product Line: 1 -> Line1, 2 -> Line 2, ...etc.

10. PACKAGING

10.1 PACKAGING SPECIFICATIONS

3 LCD TV modules / 1 Box

Box dimensions: 1190(L) X 280 (W) X 720(H)

Weight: approximately 52Kg (3 modules per box)

10.2 PACKAGING METHOD

Figures 10-1 and 10-2 are the packing method.

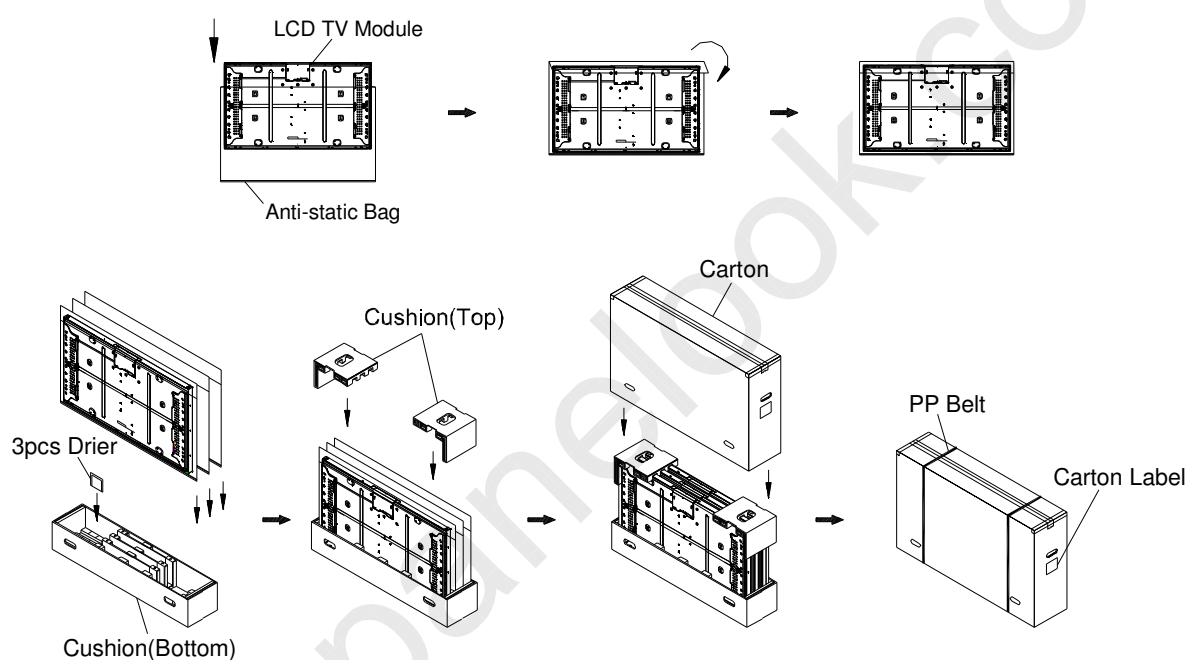


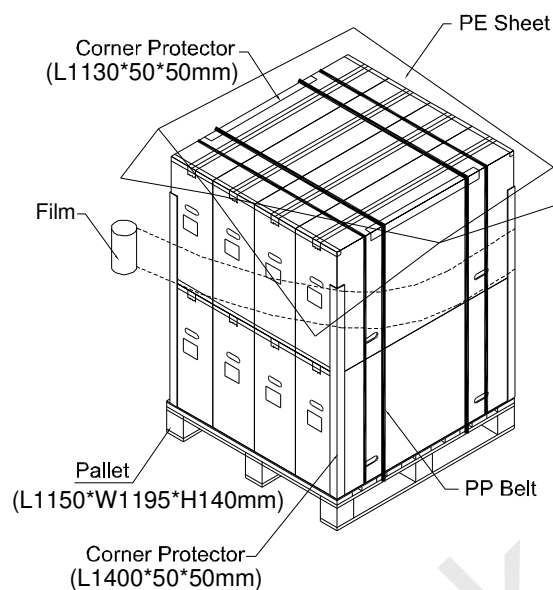
Figure.10-1 packing method

Figure.10-2 Packing method

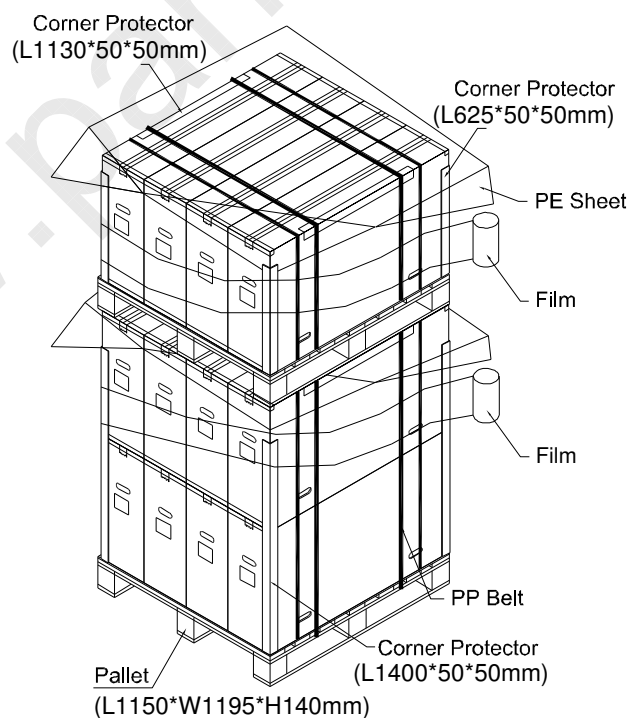
**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date: Dec. 26. 2007

Model No.: V470H1-LH3

Preliminary


Sea / Land Transportation (40ft HQ Container)



**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date: Dec. 26. 2007

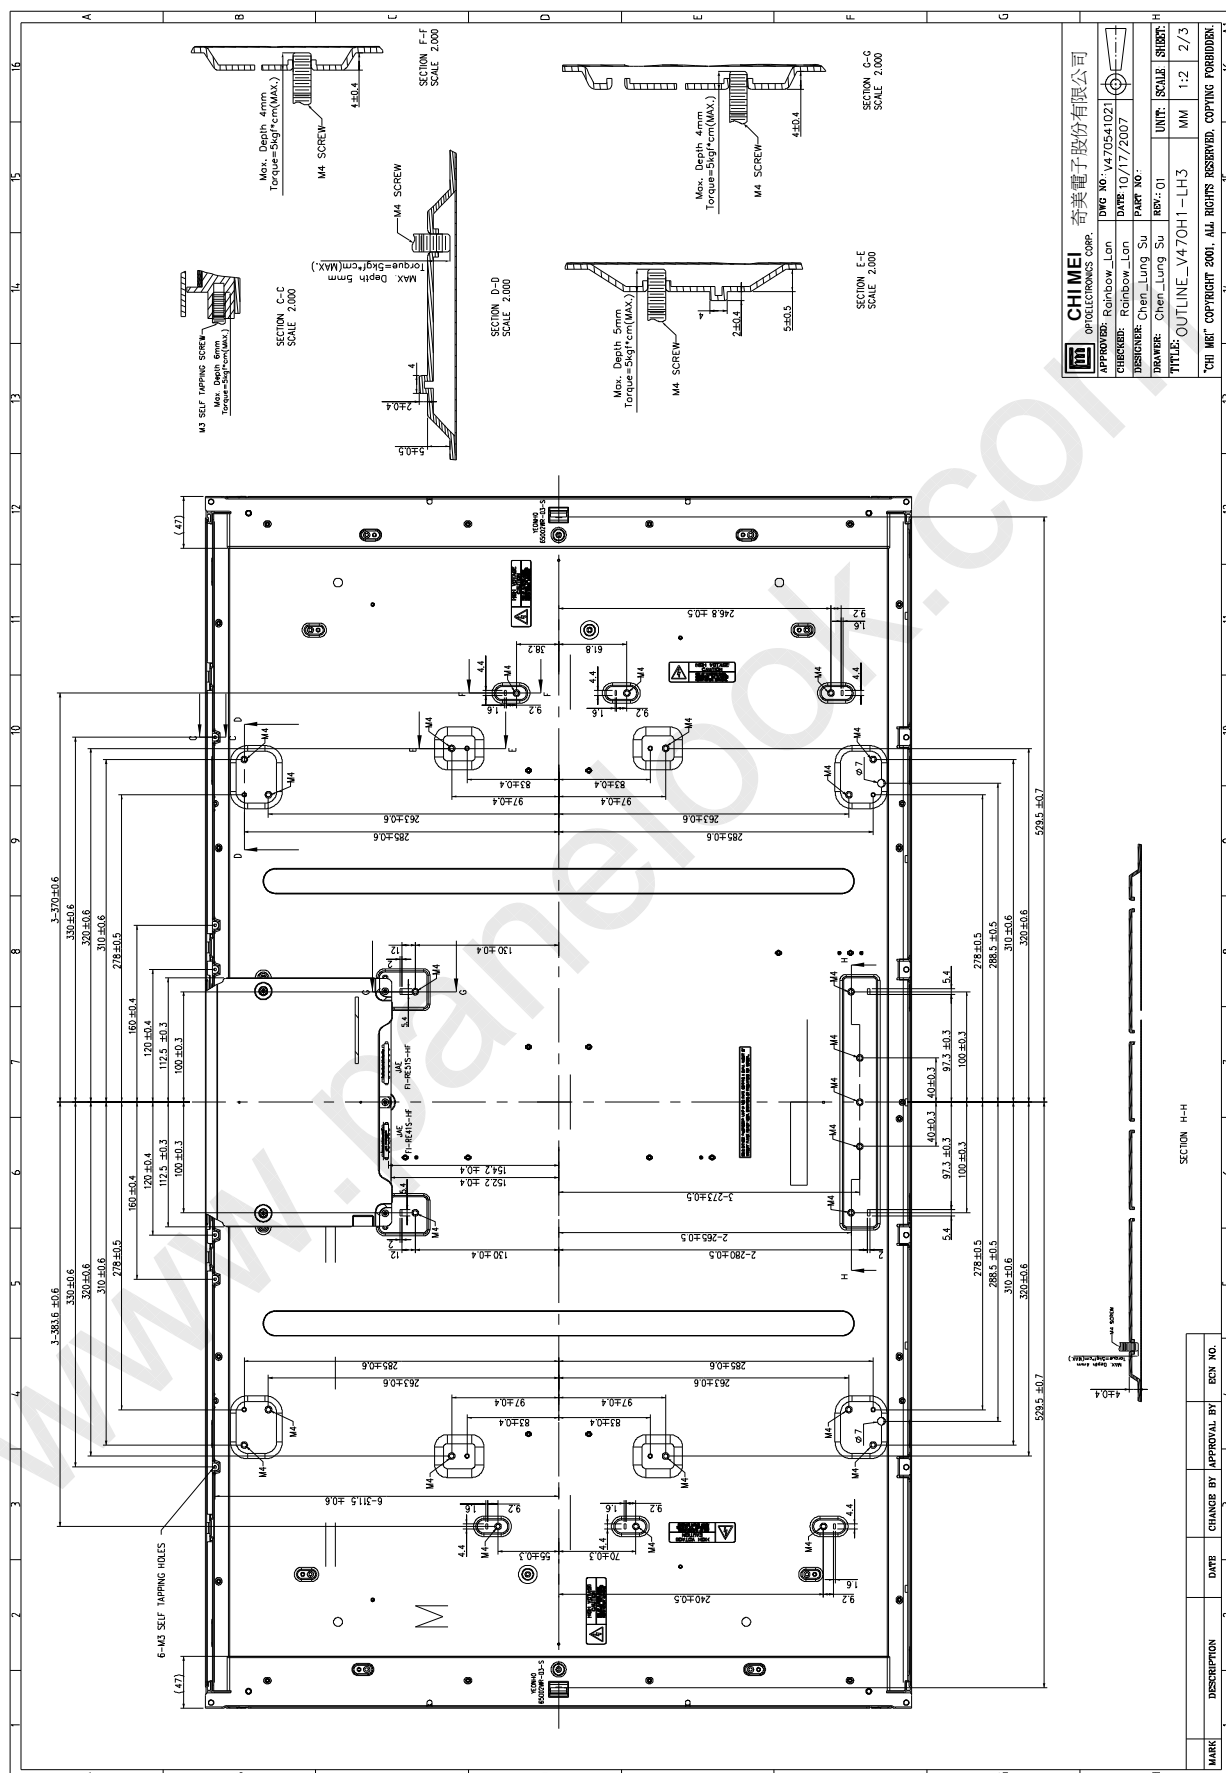Model No.: V470H1-LH3

Preliminary

**CHI MEI**
OPTOELECTRONICS CORP.

Issue Date: Dec. 26. 2007

Model No.: V470H1-LH3

Preliminary