




PHASE NOISE (1 Hz BW, typical)

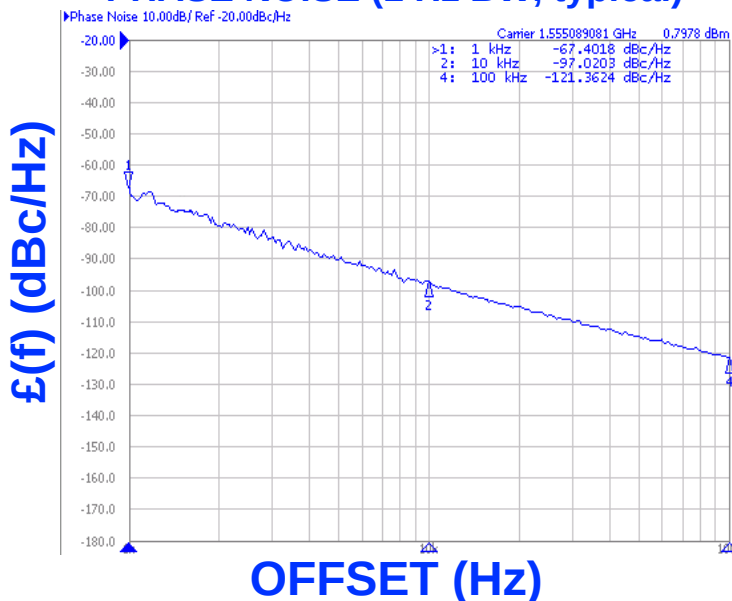


FEATURES
- Frequency Range: 1440 - 1670 MHz - Tuning Voltage: 0.5-3.5 Vdc - MINI-14S - Style Package
APPLICATIONS
- Personal Communication Systems - Earthstations - Portable Radios

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	1440 - 1670	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-97	dBc/Hz
Harmonic Suppression (2nd, typ.)	-9	dBc
Tuning Voltage	0.5-3.5	Vdc
Tuning Sensitivity (avg.)	116	MHz/V
Power Output	5±2	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<4	MHz/V
Pulling (14dB Return Loss, Any Phase)	<8	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-14S	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	4.5	Vdc
Supply Current (Icc, typ.)	14	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
- AN-100/1 : Mounting and Grounding of VCOs - AN-102 : Proper Output Loading of VCOs - AN-107 : How to Solder Z-COMM VCOs
NOTES:

TUNING CURVE, typ.

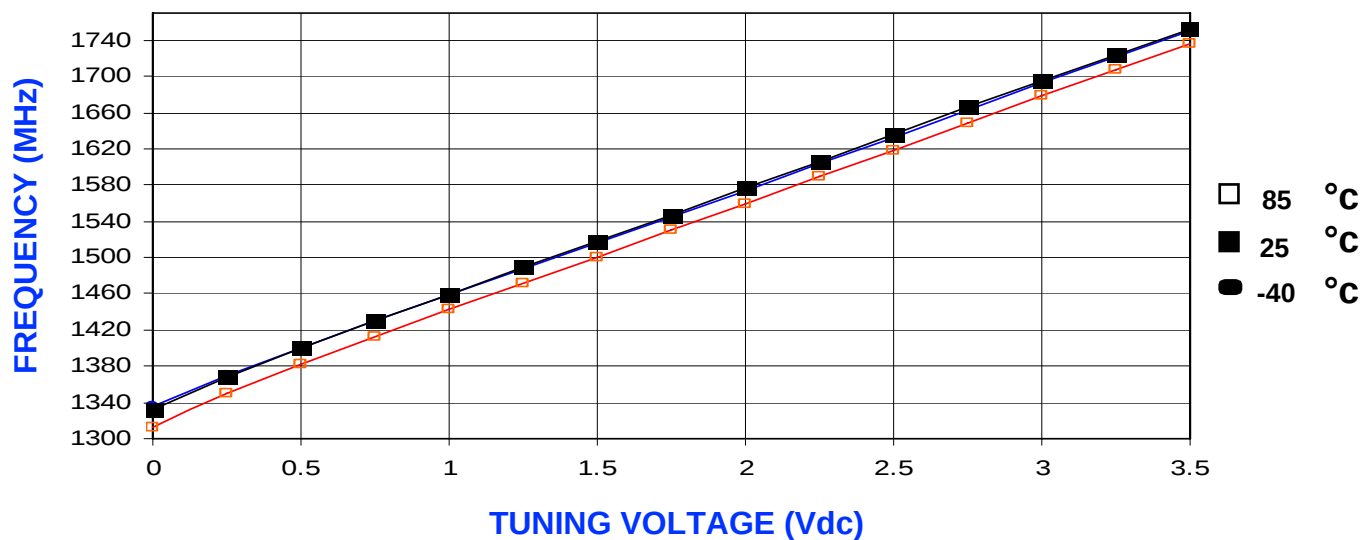

POWER CURVE, typ.

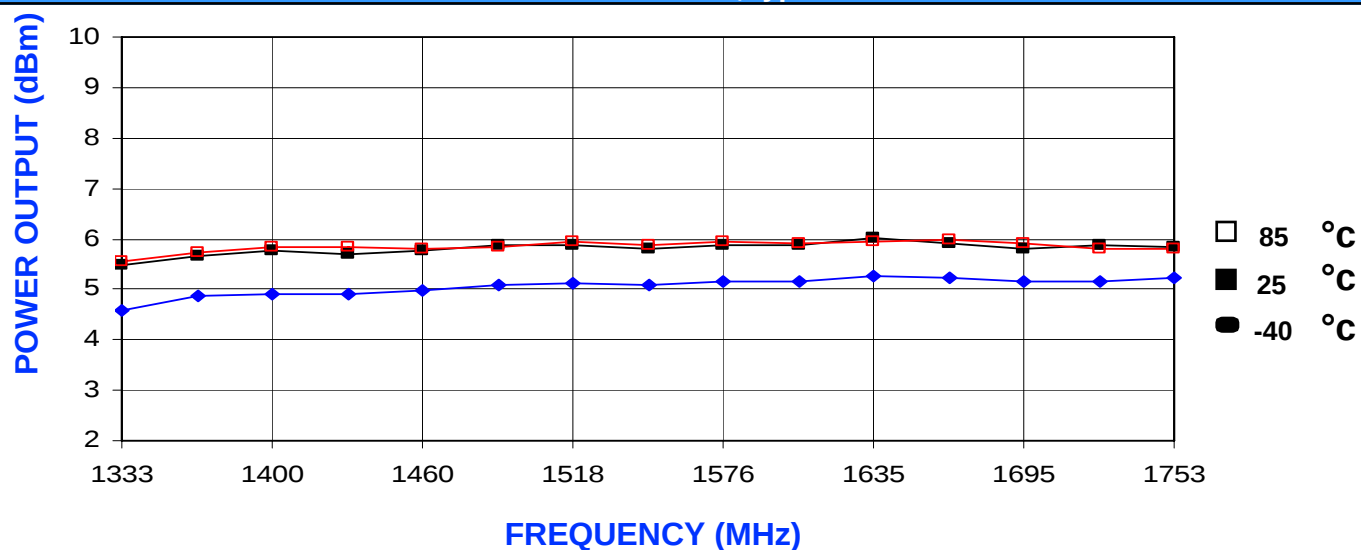

PHYSICAL DIMENSIONS

