


**PHASE NOISE (1 Hz BW, typical)**

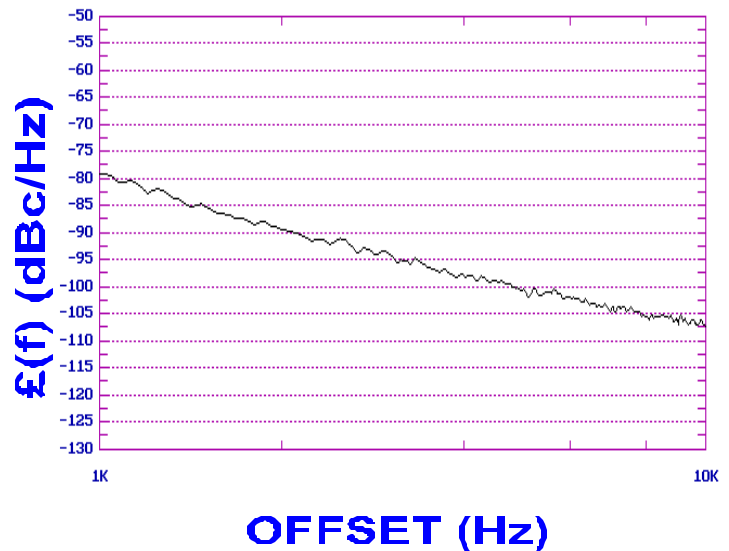

**FEATURES**

- Frequency Range: 1670 - 1731 MHz
- Tuning Voltage: 1-4 Vdc
- MINI-16-L - Style Package

**APPLICATIONS**

- Earthstations
- Satellite Modems
- Handheld Phones

**PERFORMANCE SPECIFICATIONS**

	VALUE	UNITS
Oscillation Frequency Range	1670 - 1731	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-107	dBc/Hz
Harmonic Suppression (2nd, typ.)	-20	dBc
Tuning Voltage	1-4	Vdc
Tuning Sensitivity (avg.)	42	MHz/V
Power Output	-2.5±3.5	dBm
Load Impedance	50	?
Input Capacitance (max.)	75	pF
Pushing	<3	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<0.3	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16-L	

**POWER SUPPLY REQUIREMENTS**

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	22	mA


All specifications are typical unless otherwise noted and subject to change without notice.

**APPLICATION NOTES**


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

**NOTES:**

**TUNING CURVE, typ.**



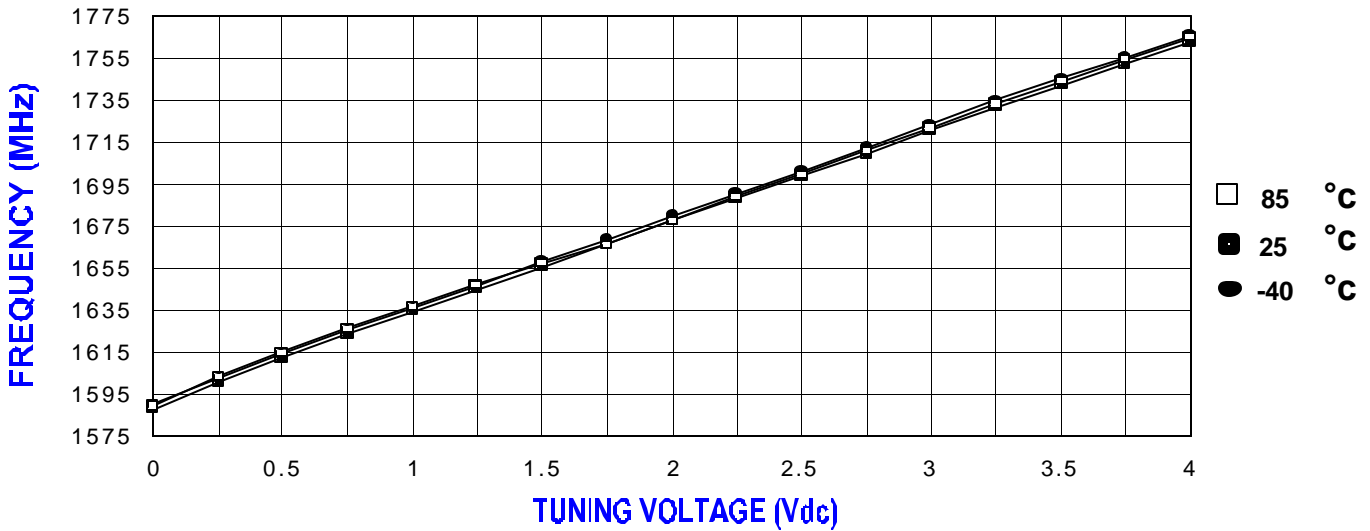


**POWER CURVE, typ.**

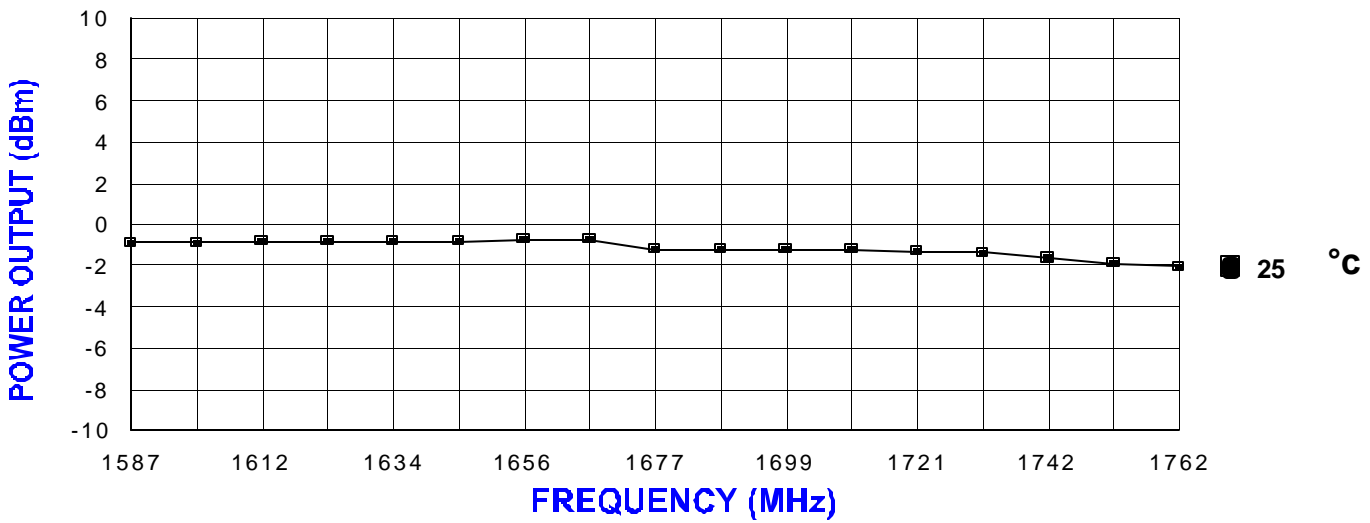

**PHYSICAL DIMENSIONS**

MINI-16-L  
415-0064 REV.3  
(DRAWING NOT TO SCALE)

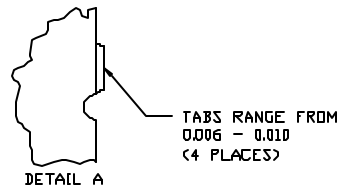

- NOTES:
1. THE INSIDE RADIUS OF ALL 16 HALF HOLES AT THE PERIMETER OF THE BOARD ARE SOLDER PLATED TO PROVIDE A SURFACE FOR THE ATTACHMENT OF THE VCO TO A MOTHERBOARD, IN 13 LOCATIONS, WITH 3 PADS BEING USED FOR ELECTROMECHANICAL INTERFACE. 16 SOLDER LOCATIONS REQUIRED AND SHOULD BE SOLDERED TO.
  2. THE SURFACE OF THE SHIELD IS TIN PLATED AND SHIELDS BASE METAL IS BRASS.
  3. THE GROUND PLANE IS BRASS AND ATTACHES TO A GROUND TRACK ON THE UPPER SIDE OF THE BOARD AS WELL AS THE SHIELD BY PTH, UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE IN INCHES.
  4. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE AS FOLLOWS:  
TOLERANCES  
XXX = ± .010
  5. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE AS FOLLOWS:  
TOLERANCES  
XXX = ± .010
- PI=VT  
P2=RF OUT  
P3=VCC

