


PHASE NOISE (1 Hz BW, typical)

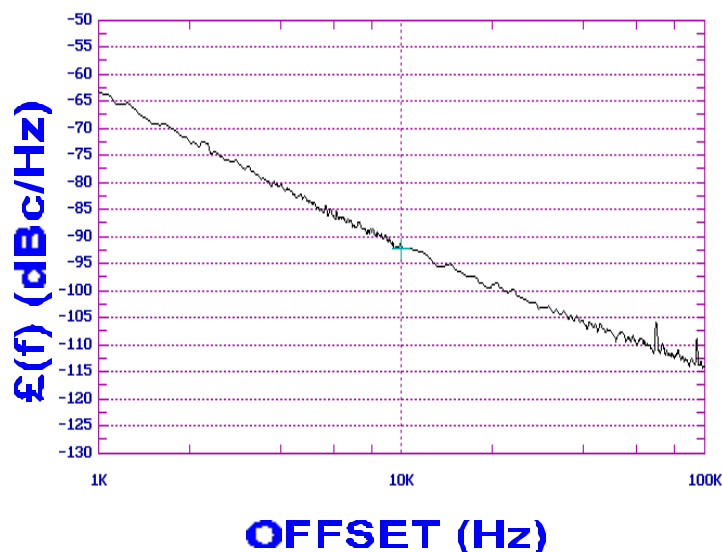

FEATURES

- Frequency Range: 2225 - 2350 MHz
- Tuning Voltage: 1-8 Vdc
- MINI-14H - Style Package

APPLICATIONS

- PCS Basestations
- Earthstations
- Satellite Modems

PERFORMANCE SPECIFICATIONS

VALUE

UNITS

Oscillation Frequency Range	2225 - 2350	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-91	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Tuning Voltage	1-8	Vdc
Tuning Sensitivity (avg.)	44	MHz/V
Power Output	11±2.5	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<5	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<15	MHz
Operating Temperature Range	-40 to 75	°C
Package Style	MINI-14H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	9	Vdc
Supply Current (Icc, typ.)	30	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:

TUNING CURVE, typ.



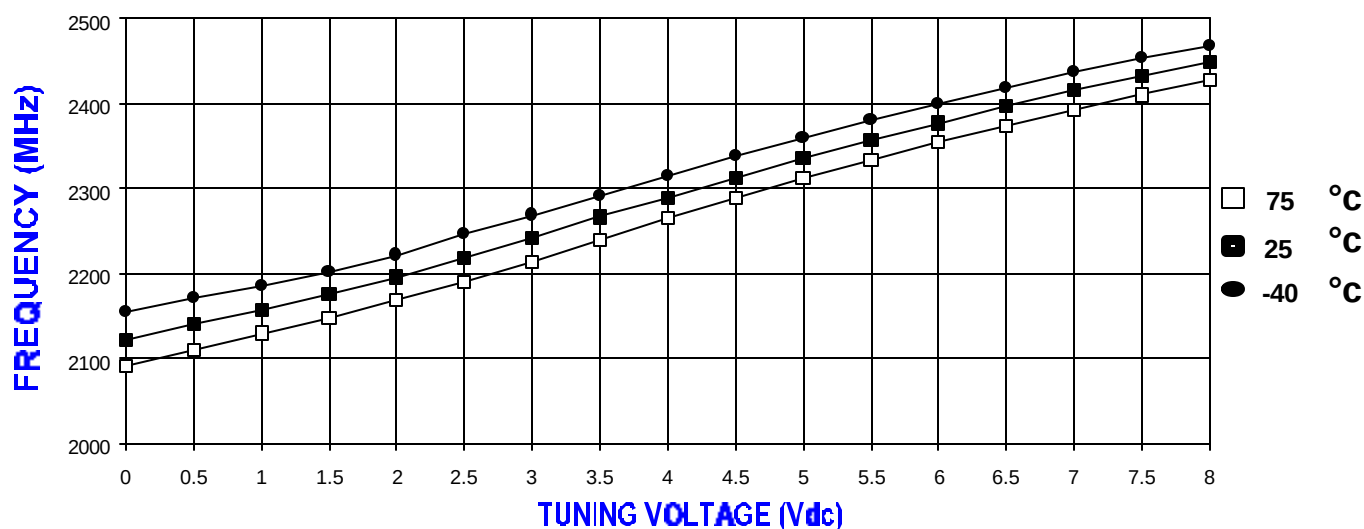


POWER CURVE, typ.

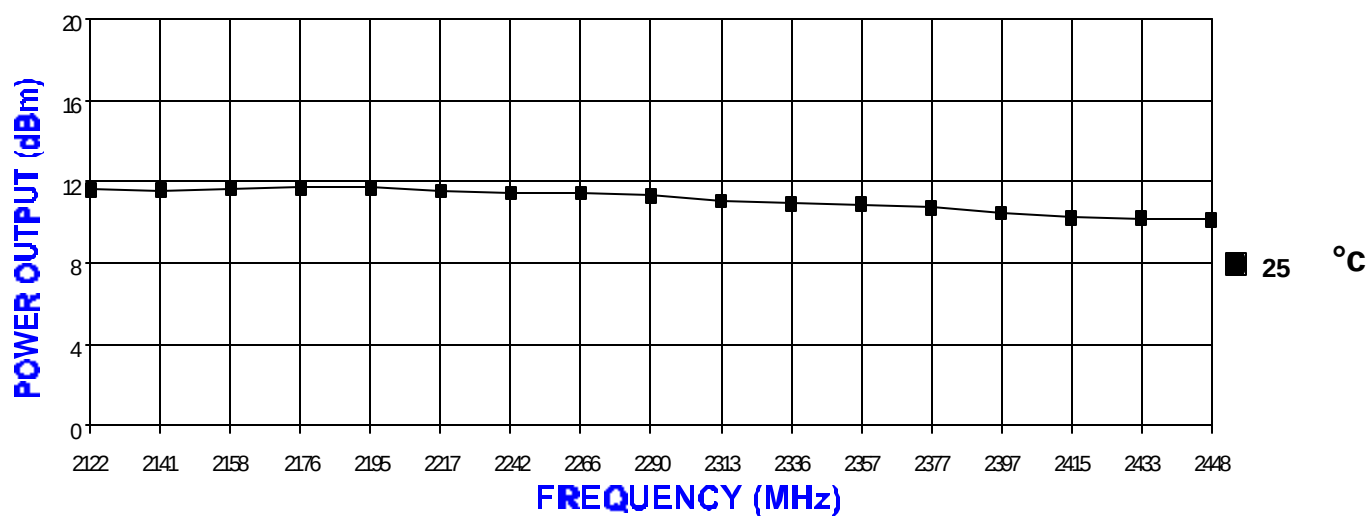

PHYSICAL DIMENSIONS

MINC-14H
415-0060 REV.3
(DRAWING NOT TO SCALE)



NOTES

1. THE INSIDE RADII OF ALL 14 HALF HOLES AT THE PERIMETER OF THE BOARD ARE SOLDER PLATED TO PROVIDE A SURFACE FOR THE ATTACHMENT OF THE VCO TO A MOTHERBOARD. IN 11 LOCATIONS, WITH 3 PADS BEING USED FOR ELECTRICAL MECHANICAL INTERFACE, 14 SOLDER LOCATIONS REQUIRED. THE SURFACE OF THE SHIELD IS 10N PLATED AND MAY BE SOLDERED TO THE SHIELD'S BASE METAL (S BRASS).
2. THE GROUND PLANE IS GROUND AND ATTACHES TO A GROUND TRACK ON THE UPPER SIDE OF THE BOARD AS WELL AS THE SHIELD BY PTH.
3. UNLESS OTHERWISE NOTED ALL DIMENSIONS ARE IN INCHES.
4. UNLESS OTHERWISE NOTED ALL TOLERANCES ARE AS FOLLOWS:
TOLERANCES
XXX= ± .010
5. UNLESS OTHERWISE NOTED ALL TOLERANCES ARE AS FOLLOWS:
TOLERANCES
XXX= ± .010

P1=V_T
P2=RF OUT
P3=V_{CC}

