


Surface Mount VCXO


ECM VF594T Series

- Wide Frequency Range
- Very Low Phase Jitter at all Frequencies
- Wide Pullability
- Standard Footprint
- Wide Operating Temperature
- EMI Shielded

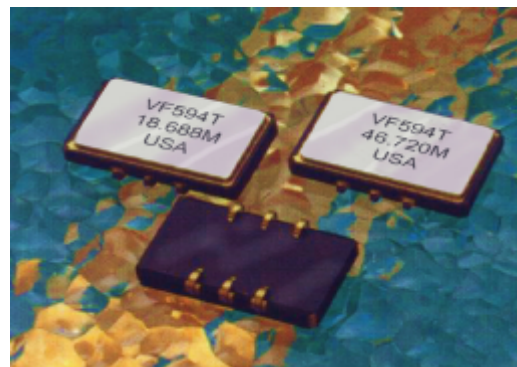

Parameter	VF594T	Notes
Frequency Range	1.54MHz to 160.0MHz	
Frequency Stability	+/-25ppm	Vs. Temp
Supply Voltage	5V +/-5% 3.3V +/-5%	Standard Option
Supply Current	12mA @ 20MHz	No Load
Load	10TTL gates or 50pF MAX, AC Coupled 50R Termination recommended @F >54MHz	
Duty Cycle	40 / 60 or 45/55	Specify
Rise & Fall Times	6nS max	
Logic "1" Level	0.9Vcc min	Max Load
Logic "0" Level	0.1Vcc max	Max Load
Start Up Time	10mS max	2mS Typ
Phase Jitter	1pS max	Fj>1kHz
Modulation BW	10kHz @ -3dB min	
Input Impedance	50K ohm min	Fm<10kHz
Control Voltage	0V to 5.0V 0V to 3.3V	Vcc 5.0V Vcc 3.3V
Pulling Range	+/- 50ppm	Or Specify
Tristate Function	Input HIGH (>2.5V) or floating: ACTIVE Input LOW (<0.5V): INFINITE IMPEDANCE	
Linearity	+/-5%, +/- 10% +/-20%	Specify
Setability (Vc for center frequency)	2.50V typ 1.65V typ	Vcc 5.0V Vcc 3.3V
Operating Temp	0°C to +70°C (-40°C to +85°C available)	

Environmental & Mechanical	
Mechanical Shock	Mil STD 202 Method 213 Cond E
Thermal Shock	Mil STD 883 Method 1011 Cond A
Vibration	MIL-STD-883 Method 2007 Cond A
Soldering Condition	260°C for 10s max: 230°C for 90s max
Hermetic Seal	Leak rate less than 5x10 ⁻⁸ Atm.cc/s of helium

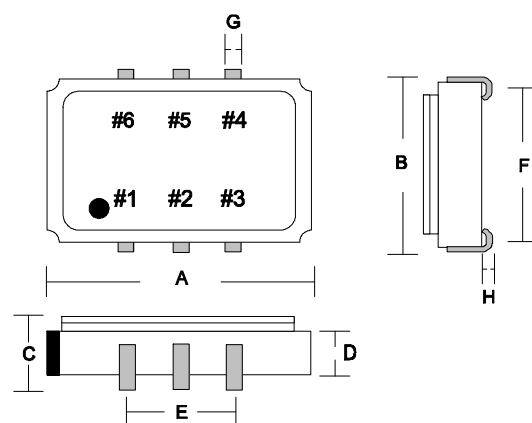

Part Numbering VF594T S L 1 50 46.72M

Series _____

Stability S=20ppm _____

Blank=50ppm _____

Supply V L=3.3 Blank =5.0 _____

Temp Range _____

1=-40+85 Blank= Std _____

Pulling Range _____

Frequency _____

Pin	1	2	3	4
Function	Vc	GND/ Case	O/P	Vcc

A	B	C	D	E	F	G	H
13.97	9.78	4.70	3.30	5.08	7.62	0.457	1.39

Dimensions in mm

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary. www.DataSheet4U.com

Issue 1