

VFOV414

Low Power OCXO

Features

- 24MHz to 300MHz frequency range
- Fast warm-up
- Very low power consumption
- Sinewave or HCMOS output
- Vibration resistant construction



Dimensions: 21.6 x 15.3 x 9.5 mm

Description

The VFOV414 is a high stability, low power OCXO that utilizes Internal Heating Resonator (IHR) technology. The entire oven control system along with the SC resonator are housed inside of the TO-8 vacuum enclosure to reduce OCXO size, power consumption and warm-up time. Applications for this product include PLL reference for telecom systems, Portable equipment, Instrumentation/Test and Measurement, and Microwave communications.

Table 1 - Ordering Information

| Model | Stability | Temp Range | Supply Voltage | Aging | Output | Package Type | Mech Shock | Frequency |
|---------|-----------|------------|----------------|-------|--------|--------------|------------|-----------|
| VFOV414 | 18 | G | E | D | H | S | | xxxMxxx |

| Code | Stability |
|------|---------------------|
| 17 | ±1x10 ⁻⁷ |
| 58 | ±5x10 ⁻⁸ |
| 38 | ±3x10 ⁻⁸ |
| 28 | ±2x10 ⁻⁸ |
| 18 | ±1x10 ⁻⁸ |
| 59 | ±5x10 ⁻⁹ |

| Code | Supply |
|------|-----------|
| D | 5V ± 5% |
| E | 3.3V ± 5% |

| Code | Output |
|------|----------|
| H | HCMOS |
| S | Sinewave |

| Code | Pkg |
|------|-----------|
| T | Thru hole |
| S | SMD |

| Code | Temp Range |
|------|-------------|
| A | 0 to 50°C |
| B | 0 to 70°C |
| C | -10 to 60°C |
| D | -20 to 70°C |
| E | -30 to 70°C |
| G | -40 to 85°C |

| Code | Per day | Per year | Frequency |
|------|---------|----------|-----------|
| A | 5ppb | 0.5ppm | ≤300MHz |
| F | 3ppb | 0.3ppm | ≤300MHz |
| B | 2ppb | 0.2ppm | ≤300MHz |
| I | 1.5ppb | 0.15ppm | ≤250MHz |
| C | 1ppb | 0.1ppm | ≤200MHz |
| D | 0.5ppb | 0.05ppm | ≤100MHz |
| L | 0.3ppb | 0.03ppm | ≤30MHz |
| G | 0.2ppb | 0.02ppm | ≤30MHz |

| Code | Shock Level |
|-------|-------------|
| blank | 30G (std) |
| 5 | 500G |

Table 2 - Available Frequency Stabilities vs. Operating Temperature

| Code | Temperature Range | Stability | | | | | |
|------|-------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| | | 17 | 58 | 38 | 28 | 18 | 59 |
| | | ±1x10 ⁻⁷ | ±5x10 ⁻⁸ | ±3x10 ⁻⁸ | ±2x10 ⁻⁸ | ±1x10 ⁻⁸ | ±5x10 ⁻⁹ |
| A | 0 to 50°C | * | * | * | D | C | B |
| B | 0 to 70°C | * | * | * | D | C | A |
| C | -10 to 60°C | * | * | * | D | C | A |
| D | -20 to 70°C | * | * | * | C | C | A |
| E | -30 to 70°C | * | * | * | C | C | A |
| G | -40 to 85°C | * | * | D | C | B | |

Stability Legend

- * = Available for all frequencies
- A = ≤30 MHz
- B = ≤50 MHz
- C = ≤100 MHz
- D = ≤250 MHz

Deviations of parameters from those indicated are available to meet specific customer requirements. Consult factory.

Part Number Example: **VFOV414-18GEDHS-10M000**



Electrical Specifications

| Parameter | Conditions & Remarks | Min | Typical | Max | Unit |
|--------------------------------|--|---------------------|-----------------|---------------|------------|
| Operating Conditions | | | | | |
| Operating Temperature Range | See Table 1 | -40 | - | +85 | °C |
| Supply Voltage | V _{CC} | 3.135 4.75 | 3.3 5.0 | 3.465 5.25 | Vdc |
| Power Consumption | During warm up Steady state @ 25°C | - - | - 150 | 1200 - | mW |
| Frequency Stability | | | | | |
| Frequency Range | F _{NOM} | 24 | - | 300 | MHz |
| Temperature Stability | See Table 2 for options | - | ±5 | - | ppb |
| Voltage Stability | V _{CC} ±5% | - | ±2 | - | ppb |
| Aging (After 30 days) | See Table 1 for options | Per day Per year | - - | ±0.5 ±0.05 | ppb ppm |
| Allan Deviation | 1s | - | 0.02 | - | ppb |
| Retrace | After 30 minutes | - | - | ±20 | ppb |
| G-Sensitivity (Note 1) | Worst axis (0 ~ 1kHz) | - | 1* | - | ppb/g |
| Warmup-Up Time | T _A =25°C; to within 0.1 ppm accuracy of freq. @ 15 min | - | 60 | - | seconds |
| Output Parameters | | | | | |
| HCMOS/TTL (order code H) | Load | ≤50 MHz | 10kOhms / 15 pF | | |
| | | ≤80 MHz | 10kOhms / 10 pF | | |
| | | ≤300 MHz | 10kOhms / 5 pF | | |
| V _H | V _{CC} = 5.0V V _{CC} = 3.3V | 3.8 2.4 | - - | - - | V |
| V _L | | - | - | 0.4 | V |
| Rise / Fall Times | @ 10MHz/100MHz | - | - | 10/3 | ns |
| Duty Cycle | | 45 | | 55 | % |
| Sinewave Output (order code S) | V _{CC} = 5.0V V _{CC} = 3.3V | +7 +4 | - - | - - | dBm |
| | R _L | - | 50 | - | Ω |
| Harmonics | | - | - | -25 | dBc |
| Sub-harmonics (Note 2) | | - | - | -40 | dBc |
| Phase Noise (Note 3) | Offset | | 10 MHz (typ) | 100 MHz (typ) | |
| | 1 Hz | | -90 | - | |
| | 10 Hz | | -120 | -90 | |
| | 100 Hz | | -145 | -115 | dBc/Hz |
| | 1 kHz | | -155 | -140 | |
| | 10 kHz | | -165 | -150 | |
| 100 kHz | | -165 | -150 | | |

Note 1. Lower G-sensitivity performance is available. Consult factory.

Note 2. See Model VFOV514 for alternate product at high frequencies and no sub-harmonics

Note 3. For additional phase noise options, consult factory.

Electrical Specifications continued

Electronic Frequency Control (option)

| | | | | | | |
|------------------|---|-----------------|-----------|---------|-----|-----|
| Control Voltage | V_C | $V_{CC} = 5.0V$ | 0 | - | 4.2 | V |
| | | $V_{CC} = 3.3V$ | 0 | - | 2.8 | |
| Tuning Range | Sufficient for 10 yrs aging; Slope positive, monotonic | | ± 0.3 | ± 1 | - | ppm |
| Reference output | V_{REF} | $V_{CC} = 5.0V$ | 4.0 | 4.2 | 4.3 | V |
| | | $V_{CC} = 3.3V$ | 2.7 | 3.0 | 3.1 | |


Absolute Maximum Ratings

| | | | | | |
|--------------------------|----------|------|---|-----------------|---|
| Supply Breakdown Voltage | V_{CC} | -0.5 | - | $V_{CC} + 20\%$ | V |
| Control Voltage | V_C | -1 | - | 6 | V |

Mechanical and Environmental

| | |
|----------------------|--|
| Storage Temperature | -60°C to +85°C |
| Air flow | 0.5 m/s max. |
| Humidity | Non-condensing, 95% |
| Mechanical Shock | Per MIL-STD-202, 30g, half sine, 11 ms (500G, 1ms option "5") |
| Vibration | Per MIL-STD-202, 10g, swept sine to 2000Hz |
| Altitude | Meets all electrical specifications to 70,000 ft elevation |
| Soldering Conditions | 260°C for 10s. Hand solder only – not reflow compatible |
| Marking | Epoxy ink or laser engraved |


Mechanical Specifications

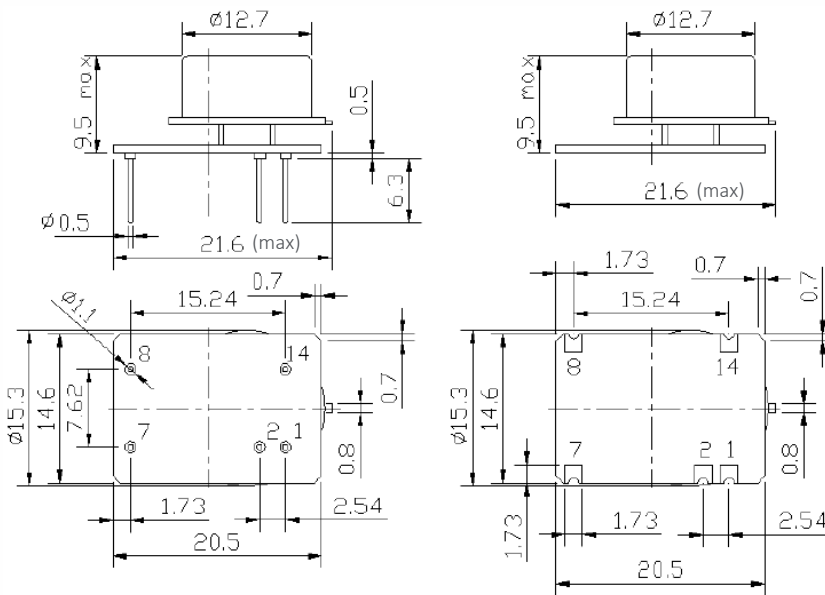

All tolerances – 0.254mm (0.01")

**Not reflow compatible


Connection Diagram

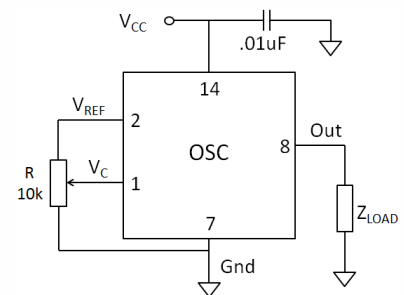

Pin Assignments

| Pin | Connection |
|-----|------------|
| 1 | V_C |
| 2 | V_{REF} |
| 7 | Ground |
| 8 | Output |
| 14 | V_{CC} |

Recommended SMD Solder Pad Geometry

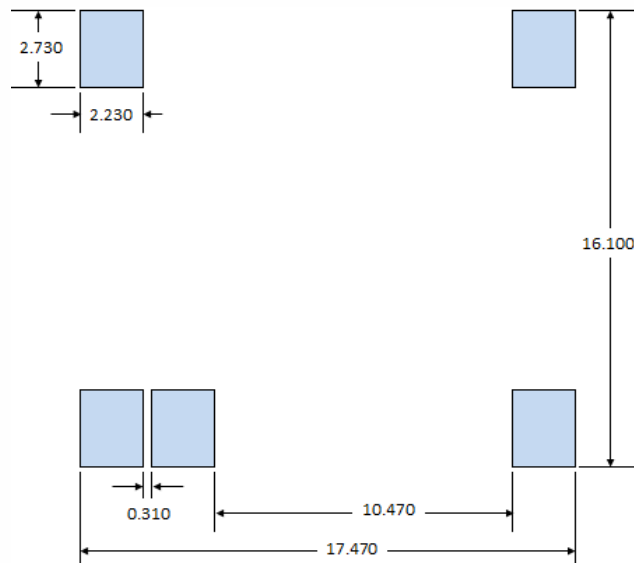

This product is specified for use only in standard commercial applications. Supplier disclaims all express and implied warranties and liability in connection with any use of this product in any non-commercial applications or in any application that may expose the product to conditions that are outside of the tolerances provided in its specification.