

Coaxial

Low Pass Filter

DC to 1350 MHz (40 dB Isolation up to 20 GHz)

NEW!
VLFX-1350

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

*Passband rating, derate linearly to 3.5W at 100°C ambient.

Features


- very good isolation, 40 dB up to 20 GHz
- 21 sections
- temperature stable LTCC internal structure
- patent pending
- re-entry frequency > 20 GHz
- rugged stainless steel unibody

Applications

- harmonic rejection
- transmitters/receivers
- lab use
- test instrumentation


CASE STYLE: FF1118
PRICE: \$ 39.95 ea. QTY (1-9)


Outline Drawing

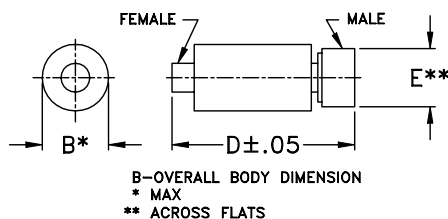


Outline Dimensions (inch mm)

B	D	E	wt.
.39	2.67	.312	grams
9.91	67.82	7.92	17.0

Functional Schematic



Typical Frequency Response

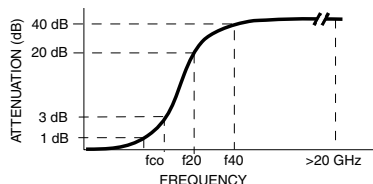


Low Pass Filter Electrical Specifications @ 25°C

MODEL NO.	PASSBAND (MHz) (Loss < 1.2dB) Max.	fco, MHz Nom (Loss 3 dB) Typ	STOPBAND (MHz) (Loss, dB)		VSWR (:1)		NO. OF SECTIONS
			f20 Min.	f40 Typ.	Stopband Typ.	Passband Typ.	
VLFX-1350	DC-1350	2050	2,425	2650-20000	10	1.3	21

Typical Performance Data @ 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.30	1.11
250	0.20	1.09
500	0.42	1.16
1000	0.76	1.14
1300	1.01	1.29
1500	1.18	1.27
1800	1.66	1.29
2100	3.92	1.76
2200	9.27	3.96
2300	20.68	7.90
2600	40.80	17.87
3000	76.88	27.55
4000	81.43	29.27
5000	78.41	46.43
7500	74.23	25.88
10000	79.16	41.61
12500	63.92	15.38
15000	55.14	9.11
17500	70.26	9.10
20000	63.12	11.15

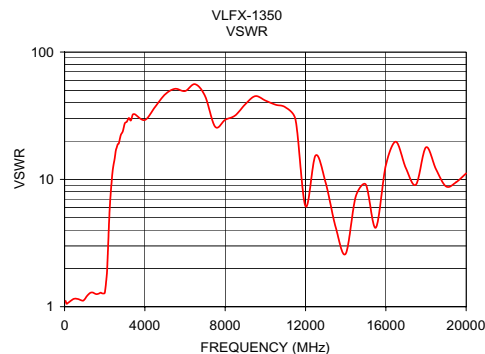

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. OR
M96318
VLFX-1350
EDU-0399
ED-11930A/19
URJ/AD/CP
050119