


Features

- N-Channel, 5V Logic Level Control
- Enhancement mode
- Very low on-resistance $R_{DS(on)}$ @ $V_{GS}=4.5\text{ V}$
- VitoMOS[®] Technology
- 100% Avalanche test
- Pb-free lead plating; RoHS compliant


Halogen-Free

Part ID	Package Type	Marking	Tape and reel information
VS5808AS	SOP8	5808AS	3000PCS/Reel

V_{DS}	55	V
$R_{DS(on),TYP@ V_{GS}=10\text{ V}}$	4.8	mΩ
$R_{DS(on),TYP@ V_{GS}=4.5\text{ V}}$	7	mΩ
I_D	18	A



Maximum ratings, at $T_A=25^\circ\text{C}$, unless otherwise specified

Symbol	Parameter	Rating	Unit
$V_{(BR)DSS}$	Drain-Source breakdown voltage	55	V
I_S	Diode continuous forward current	$T_A=25^\circ\text{C}$ 3	A
I_D	Continuous drain current@ $V_{GS}=10\text{V}$	$T_A=25^\circ\text{C}$ 18	A
		$T_A=100^\circ\text{C}$ 11	A
I_{DM}	Pulse drain current tested ①	$T_A=25^\circ\text{C}$ 72	A
EAS	Avalanche energy, single pulsed ②	64	mJ
P_D	Maximum power dissipation	$T_A=25^\circ\text{C}$ 3.1	W
V_{GS}	Gate-Source voltage	±20	V
MSL		Level 3	
$T_{STG} T_J$	Storage and operating temperature range	-55 to 150	°C

Thermal Characteristics


Symbol	Parameter	Typical	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	24	°C/W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	40	°C/W

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ T _j =25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =250μA	55	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =55V,V _{GS} =0V	--	--	0.1	μA
	Zero Gate Voltage Drain Current(T _j =125℃)	V _{DS} =55V,V _{GS} =0V	--	--	100	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V,V _{DS} =0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} =V _{GS} ,I _D =250μA	1.0	2.0	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance③	V _{GS} =10V, I _D =10A	--	4.8	6	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance③	V _{GS} =4.5V, I _D =5A	--	7	9	mΩ
Dynamic Electrical Characteristics @ T _j = 25°C (unless otherwise stated)						
C _{iss}	Input Capacitance	V _{DS} =30V,V _{GS} =0V, f=1MHz	--	2625	--	pF
C _{oss}	Output Capacitance		--	205	--	pF
C _{rss}	Reverse Transfer Capacitance		--	195	--	pF
R _g	Gate Resistance	f=1MHz	--	1.9	--	Ω
Q _g	Total Gate Charge	V _{DS} =30V,I _D =5A, V _{GS} =10V	--	44	--	nC
Q _{gs}	Gate-Source Charge		--	7	--	nC
Q _{gd}	Gate-Drain Charge		--	12	--	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DD} =30V, I _D =5A, R _G =6.8Ω, V _{GS} =10V	--	15	--	nS
t _r	Turn-on Rise Time		--	23	--	nS
t _{d(off)}	Turn-Off Delay Time		--	67	--	nS
t _f	Turn-Off Fall Time		--	13	--	nS
Source- Drain Diode Characteristics@ T _j = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage	I _{SD} =10A,V _{GS} =0V	--	0.76	1.0	V
t _{rr}	Reverse Recovery Time	T _j =25℃,I _{sd} =5A, V _{GS} =0V di/dt=200A/μs	--	43	--	nS
Q _{rr}	Reverse Recovery Charge				84	

NOTE:


- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Limited by T_{jmax} , starting $T_j = 25^{\circ}\text{C}$, $L = 0.5\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 16A$, $V_{GS}=10V$. Part not recommended for use above this value
- ③ Pulse width $\leq 300\mu s$; duty cycle $\leq 2\%$.

Typical Characteristics

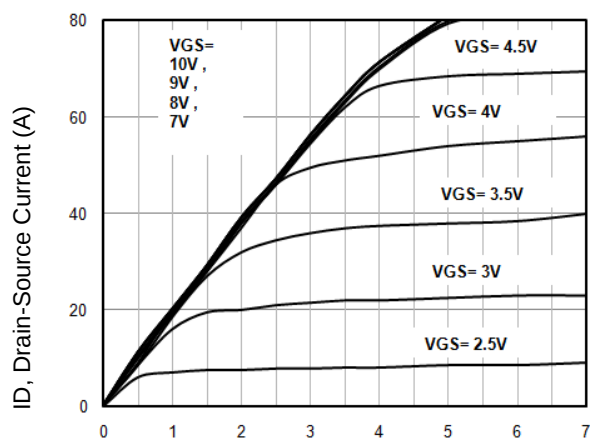


V_{DS} , Drain-Source Voltage (V)

Fig1. Typical Output Characteristics

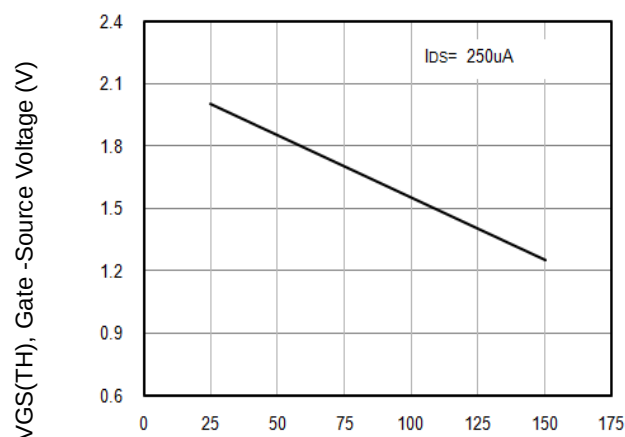


T_J - Junction Temperature ($^{\circ}C$)

Fig2. $V_{GS(TH)}$ Gate-Source Voltage Vs. T_J

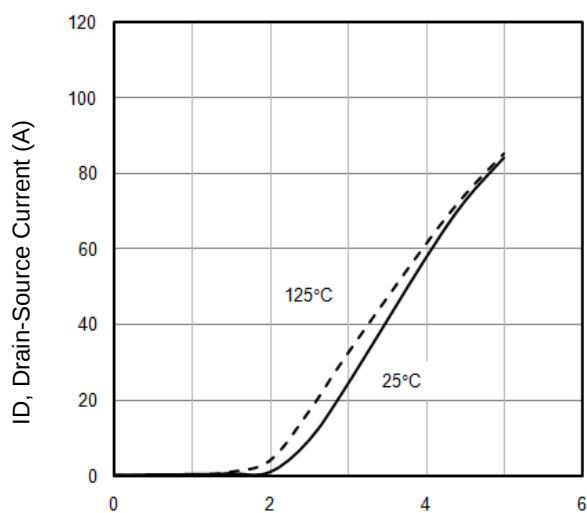

V_{GS} , Gate-Source Voltage (V)

Fig3. Typical Transfer Characteristics

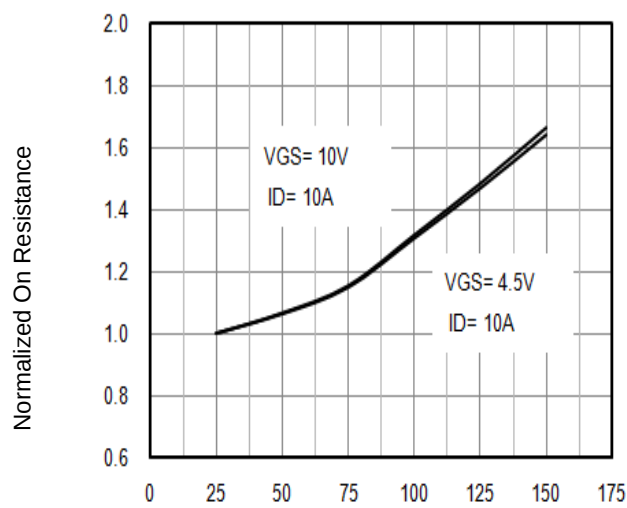

T_J - Junction Temperature ($^{\circ}C$)

Fig4. Normalized On-Resistance Vs. T_J

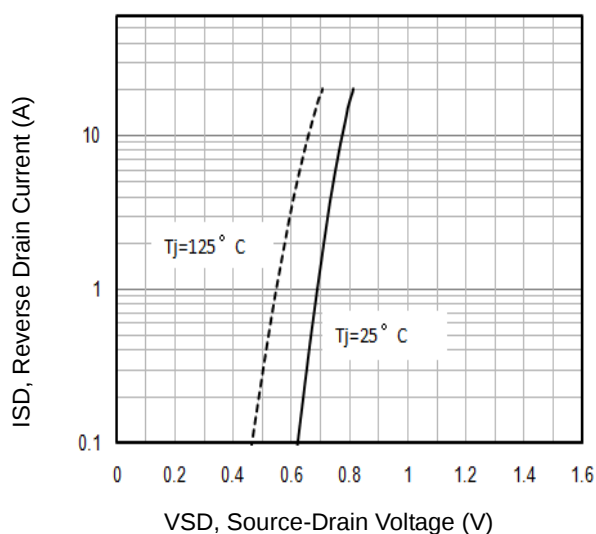


Fig5. Typical Source-Drain Diode Forward Voltage

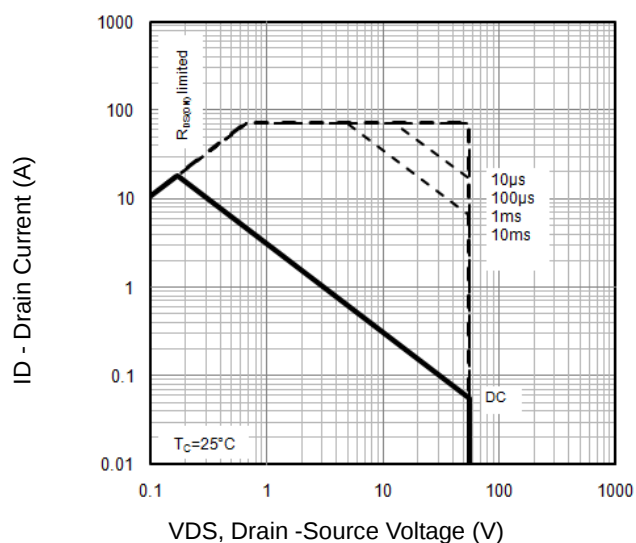


Fig6. Maximum Safe Operating Area

Typical Characteristics

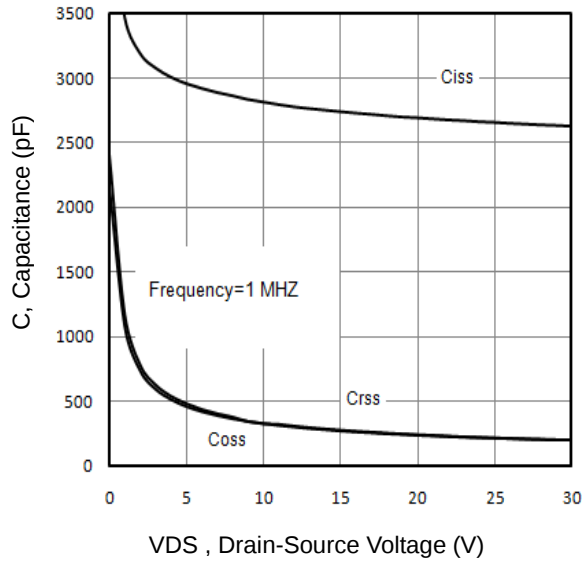


Fig7. Typical Capacitance Vs. Drain-Source Voltage

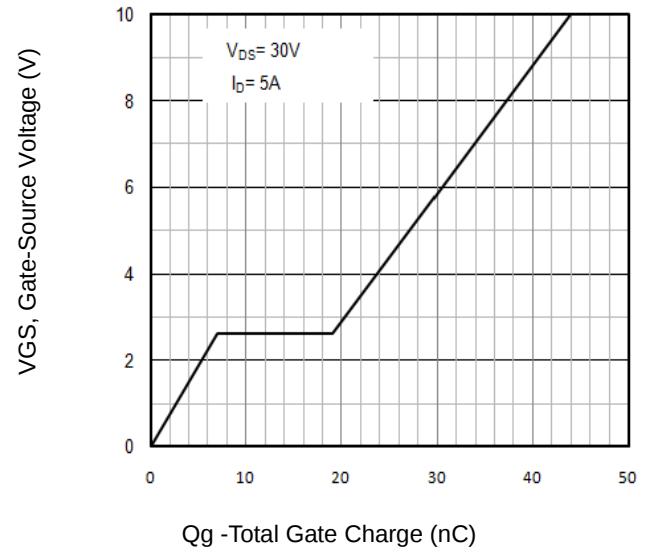


Fig8. Typical Gate Charge Vs. Gate-Source Voltage

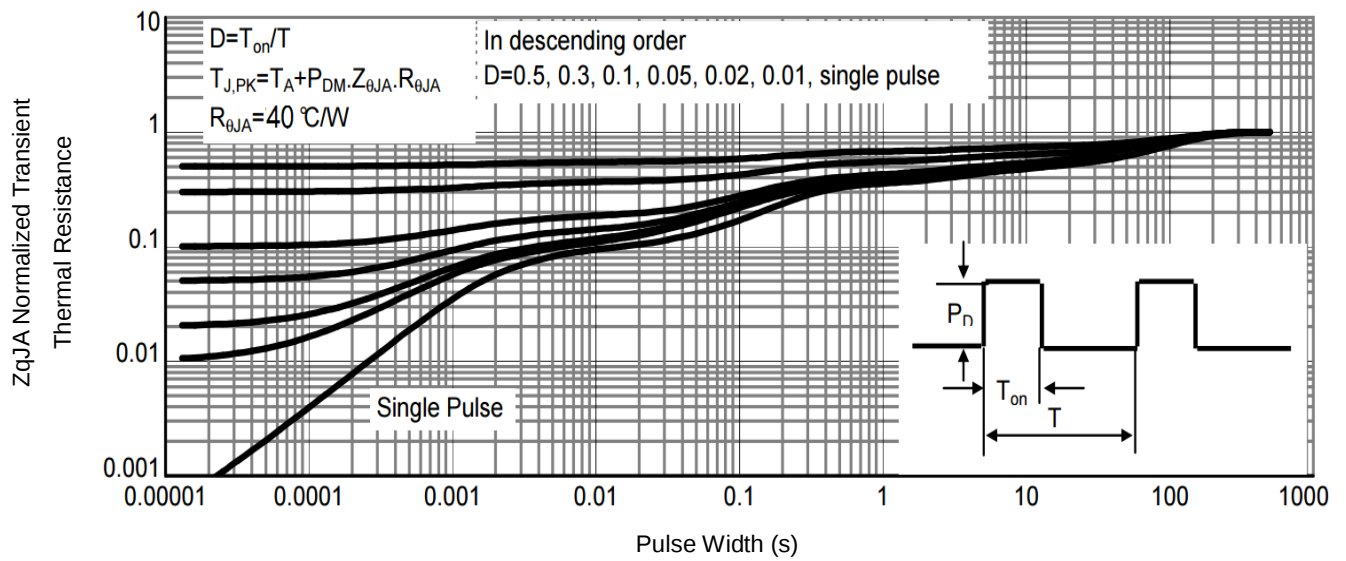


Fig9. Normalized Maximum Transient Thermal Impedance

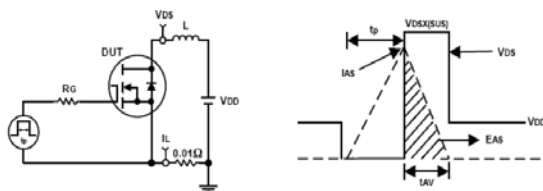


Fig10. Unclamped Inductive Test Circuit and waveforms

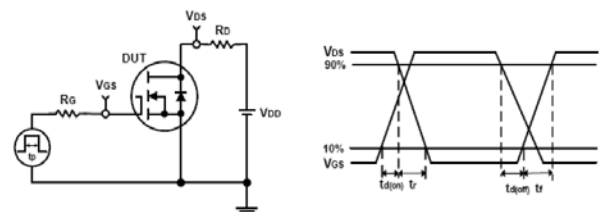
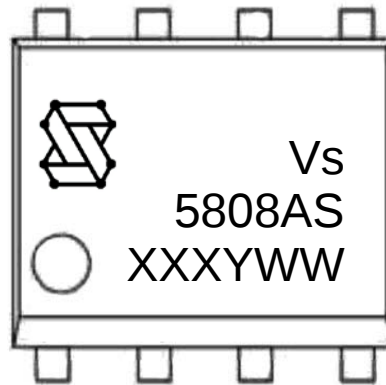


Fig11. Switching Time Test Circuit and waveforms

Marking Information

1st line: Company Code (Vs), Company Logo

2nd line: Part Number (5808AS)


3rd line: Date code (XXXYWW)

XXX: Wafer Lot Number

Y: Year Code, e.g. E means 2017

WW: Week Code

SOP8 Package Outline Data

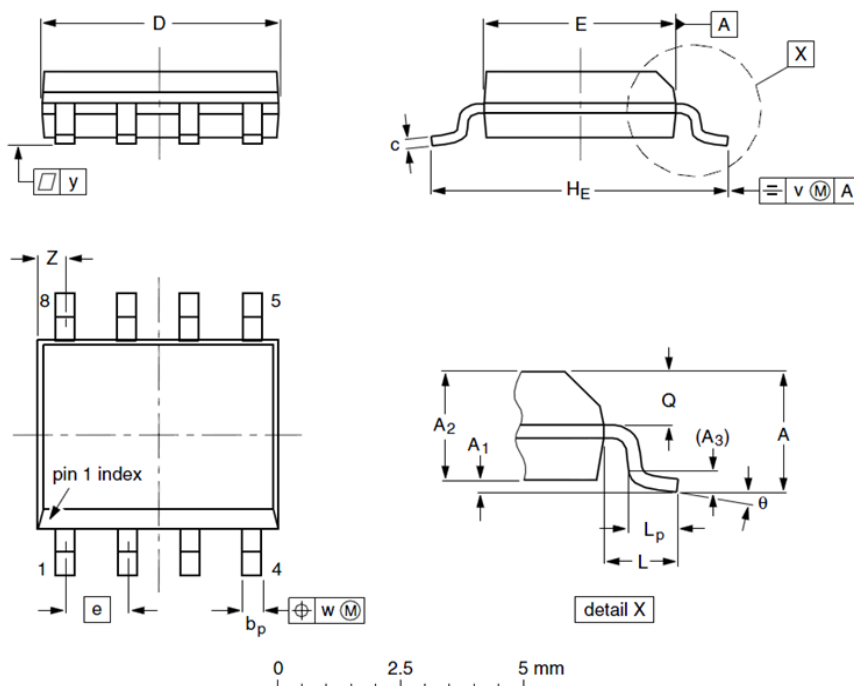

Label	Dimensions (unit: mm)		
	Min	Typ	Max
A	--	--	1.75
A ₁	0.10	0.18	0.25
A ₂	1.25	1.35	1.50
A ₃	--	0.25	--
b _p	0.36	0.42	0.51
c	0.19	0.22	0.25
D	4.80	4.92	5.00
E	3.80	3.90	4.00
e	--	1.27	--
H _E	5.80	6.00	6.20
L	--	1.05	--
L _p	0.40	0.68	1.00
Q	0.60	0.65	0.725
v	--	0.25	--
w	--	0.25	--
y	--	0.10	--
Z	0.30	0.50	0.70
θ	0°		8°

Notes:

1. Follow JEDEC MS-012.
2. Dimension "D" does NOT include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15mm per side.
3. Dimension "E" does NOT include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.25mm per side.
4. Dimension "b_p" does NOT include dambar protrusion. Allowable dambar protrusion shall be 0.1mm total in excess of "b_p" dimension at maximum material condition. The dambar cannot be located on the lower radius of the foot.

Customer Service

Sales and Service:

sales@vgsemi.com

Vanguard Semiconductor CO., LTD

TEL: (86-755) -26902410

FAX: (86-755) -26907027

WEB: www.vgsemi.com