


1.SCOPE

SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal. Piezo electrical chip. They are used in electronic equipments such as TV and so on.

2.Construction


2.1 Dimension and materials

Type: VSF389A2M

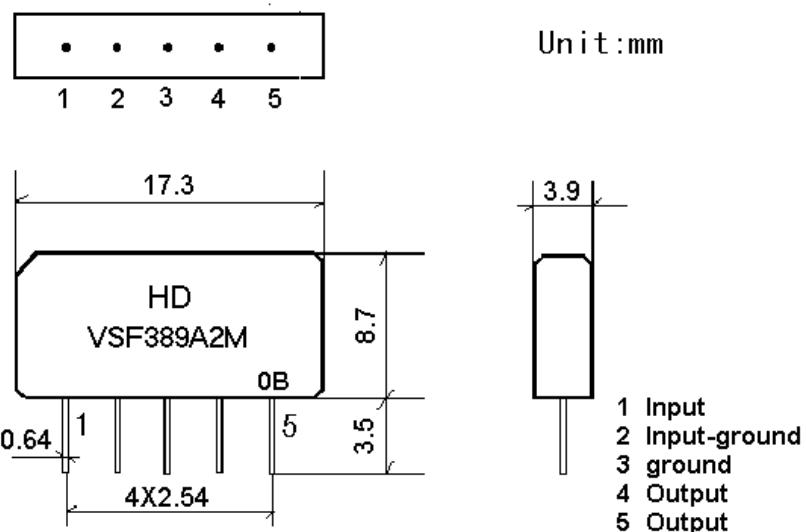


0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

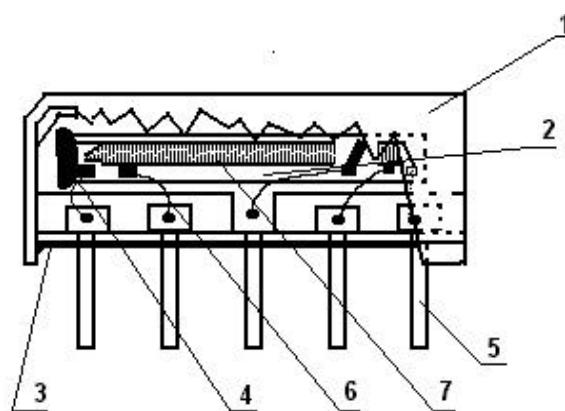

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

2.2. Circuit construction, measurement circuit

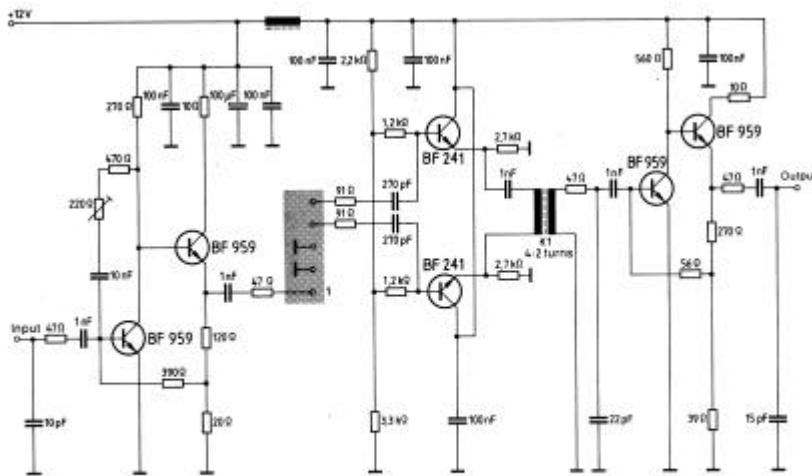

Test circuit for SIP-5 filter
Input impedance of the symmetrical post-amplifier: 2 kΩ in parallel with 3 pF

3. Characteristics

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15 to 35

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

Operating temperature range

Operating temperature range is the range of ambient temperatures in which the filter can be operated continuously. -10 ~ +60

Storage temperature range

Storage temperature range is the range of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

Reference temperature +25

3.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

3.2 Electrical Characteristics

Source impedance $Z_s=50$

Load impedance $Z_L=2k \text{ // } 3pF$

$T_A=25$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	38.90MHz	17.9	19.9	21.9	dB
Relative attenuation	39.65MHz	2.4	3.9	5.4	dB
	33.40MHz	-1.7	-0.2	1.3	dB
	33.15MHz	-1.9	-0.4	1.1	dB
	31.90MHz	33.0	47.0	-	dB
	40.40MHz	31.0	45.0		dB
	44.40MHz	38.0	48.0		dB
Sidelobe	25.00~30.40MHz	36.0	42.0		dB
	30.40~31.90MHz	31.0	40.0		dB
	40.40~45.00MHz	31.0	38.0		dB
Temperature coefficient		-72			ppm/k

3.3 Environmental Performance Characteristics


Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70 1000H	< 1.0
Low temperature test -40 1000H	< 1.0
Humidity test 40 90-95% 1000H	< 1.0
Thermal shock -20 ==25 ==80 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260 for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260 +5/-0 for 5 sec.	More than 95% of total area of the pins should be covered with solder

3.4 Mechanical Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0

Lead bend test 90° bending with 500g weigh 2 times	<1.0
---	------


3.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	 <p><1.0</p>


3.6 Frequency response

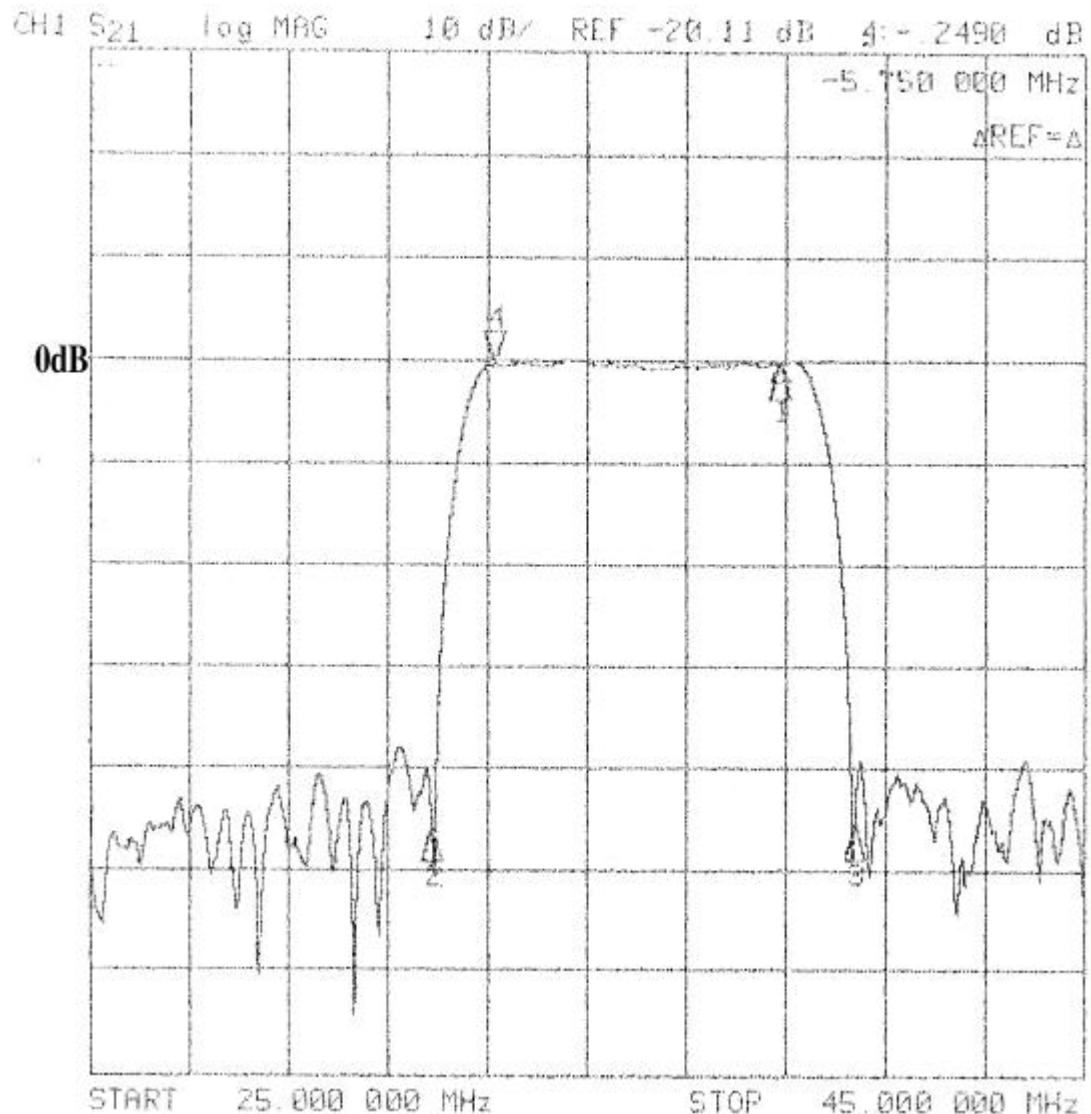

CH1 S₂₁ delay 30 ns/
CH2 S₂₁ log MAG 1 dB/ REF -20 dB 2: 1.354 μ s
2 -20.02 dB

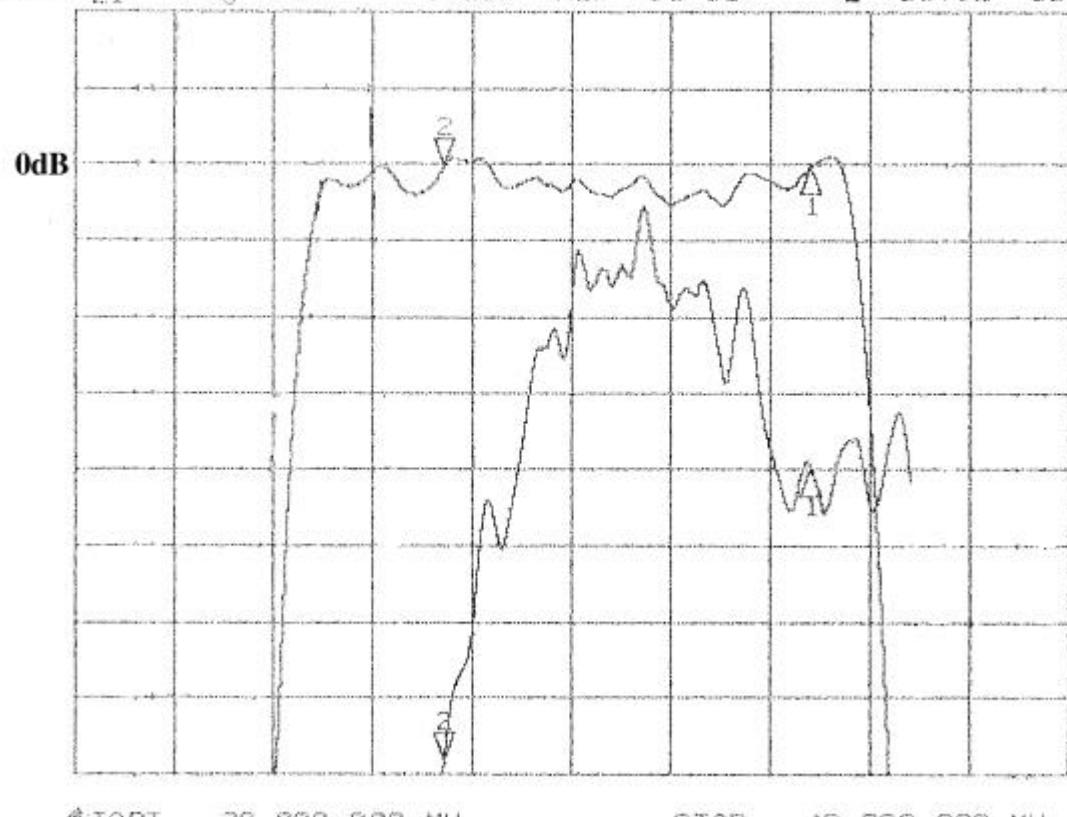

CH1 S₂₁ log MAG 10 dB/ REF -20.37 dB

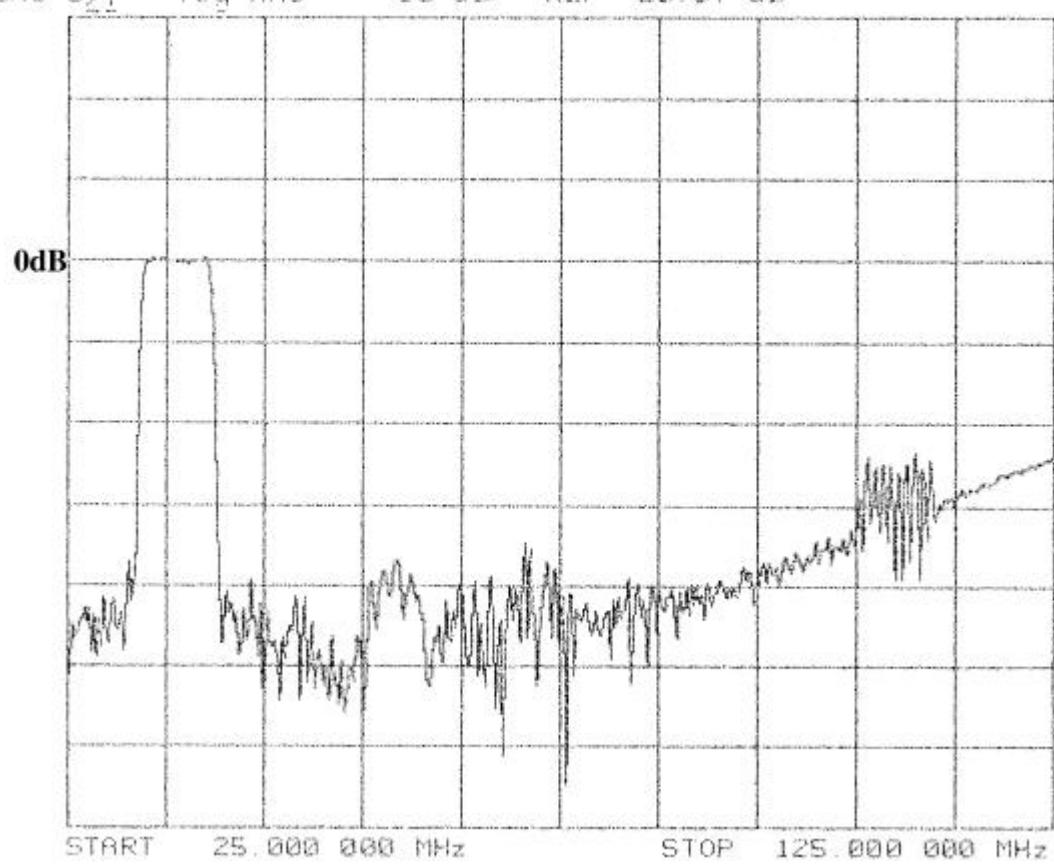

Time domain response:

