


## Features

- P-Channel, -5V Logic Level Control
- Very low on-resistance RDS(on) @  $V_{GS}=-4.5$  V
- Fast Switching
- Enhancement mode
- 100% Avalanche Tested
- Pb-free lead plating; RoHS compliant

$V_{DS}$	-60	V
$R_{DS(on),TYP} @ V_{GS}=-10$ V	8.0	mΩ
$R_{DS(on),TYP} @ V_{GS}=-4.5$ V	10.0	mΩ
$I_D$	-80	A

## PDFN5x6

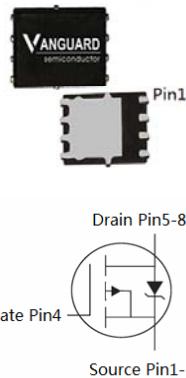

Part ID	Package Type	Marking	Tape and reel information
VSP007P06MS	PDFN5x6	007P06M	3000pcs/Reel

**Maximum ratings**, at  $T_j=25$  °C, unless otherwise specified

Symbol	Parameter	Rating	Unit	
<b>Common Ratings (Tc=25°C Unless Otherwise Noted)</b>				
$V_{GS}$	Gate-Source Voltage	±20	V	
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	-60	V	
$T_J$	Maximum Junction Temperature	175	°C	
$T_{STG}$	Storage Temperature Range①	-55 to 175	°C	
$I_S$	Diode Continuous Forward Current	$T_c=25$ °C	-80	A
<b>Mounted on Large Heat Sink</b>				
$I_D$	Continuous Drain current @ $V_{GS}=-10$ V	$T_c=25$ °C	-80	A
		$T_c=100$ °C	-51	A
$I_{DM}$	Pulse Drain Current Tested ②	$T_c=25$ °C	-300	A
$P_D$	Maximum Power Dissipation	$T_c=25$ °C	115	W
$R_{JJC}$	Thermal Resistance-Junction to Case		1.3	°C/W
$R_{JA}$	Thermal Resistance Junction-Ambient		48	°C/W
<b>Drain-Source Avalanche Ratings</b>				
EAS	Avalanche Energy, Single Pulsed ③	56	mJ	

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
<b>Static Electrical Characteristics @ <math>T_J = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-60	--	--	V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current( $T_c=25^\circ\text{C}$ )	$V_{\text{DS}}=-60\text{V}, V_{\text{GS}}=0\text{V}$	--	--	-1	$\mu\text{A}$
	Zero Gate Voltage Drain Current( $T_c=125^\circ\text{C}$ )	$V_{\text{DS}}=-60\text{V}, V_{\text{GS}}=0\text{V}$	--	--	-100	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body Leakage Current	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	--	--	$\pm 100$	nA
$V_{\text{GS}(\text{TH})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-1.0	-1.6	-2.5	V
$R_{\text{DS}(\text{ON})}$	Drain-Source On-State Resistance ②	$V_{\text{GS}}=-10\text{V}, I_{\text{D}}=-35\text{A}$	--	8.0	10.0	$\text{m}\Omega$
$R_{\text{DS}(\text{ON})}$	Drain-Source On-State Resistance ②	$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-10\text{A}$	--	10.0	13.0	$\text{m}\Omega$
<b>Dynamic Electrical Characteristics @ <math>T_J = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=-30\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	--	6985	--	pF
$C_{\text{oss}}$	Output Capacitance		--	450	--	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		--	290	--	pF
$R_g$	Gate Resistance	$f=1\text{MHz}$		13.8		$\Omega$
$Q_g$	Total Gate Charge	$V_{\text{DS}}=-30\text{V}, I_{\text{D}}=-20\text{A}, V_{\text{GS}}=-10\text{V}$	--	94	--	nC
$Q_{\text{gs}}$	Gate-Source Charge		--	21	--	nC
$Q_{\text{qd}}$	Gate-Drain Charge		--	25	--	nC
<b>Switching Characteristics</b>						
$t_{\text{d(on)}}$	Turn-on Delay Time	$V_{\text{DD}}=-30\text{V}, I_{\text{D}}=-5\text{A}, R_{\text{G}}=6.8\Omega, V_{\text{GS}}=-10\text{V}$	--	19	--	nS
$t_r$	Turn-on Rise Time		--	26	--	nS
$t_{\text{d(off)}}$	Turn-Off Delay Time		--	89	--	nS
$t_f$	Turn-Off Fall Time		--	45	--	nS
<b>Source- Drain Diode Characteristics @ <math>T_J = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$V_{\text{SD}}$	Forward on voltage	$I_{\text{SD}}=-35\text{A}, V_{\text{GS}}=0\text{V}$	--	-0.88	-1.3	V
$t_{\text{rr}}$	Reverse Recovery Time	$T_J=25^\circ\text{C}, I_{\text{SD}}=-20\text{A}, V_{\text{GS}}=0\text{V}, \frac{di}{dt}=-500\text{A}/\mu\text{s}$	--	35	--	nS
$Q_{\text{rr}}$	Reverse Recovery Charge			175		nC

NOTE:

① Repetitive rating; pulse width limited by max. junction temperature.

② Pulse width  $\leq 300\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

③ Limited by  $T_{J\text{max}}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.5\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = -15\text{A}$ ,  $V_{GS} = -10\text{V}$ . Part not recommended for use above this value

## Typical Characteristics

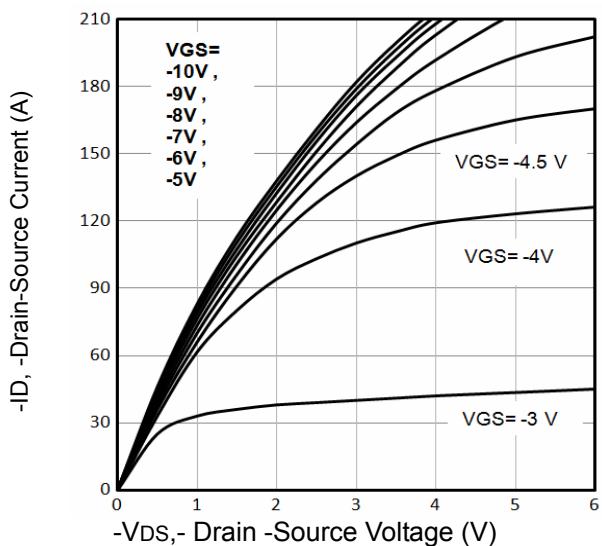


Fig1. Typical Output Characteristics

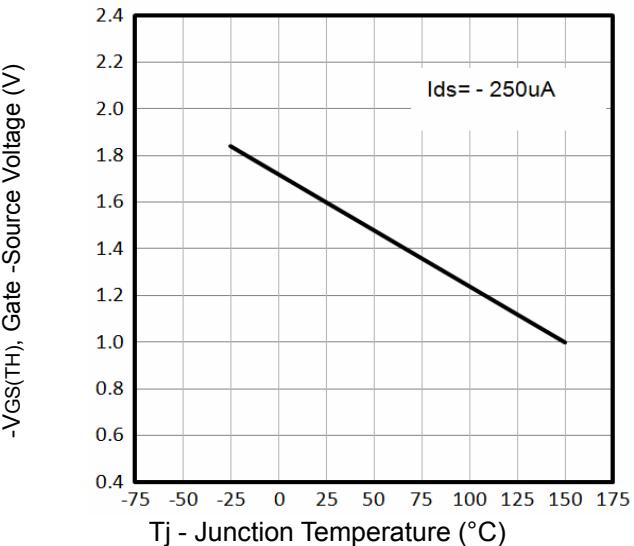


Fig2. Threshold Voltage Vs. Temperature

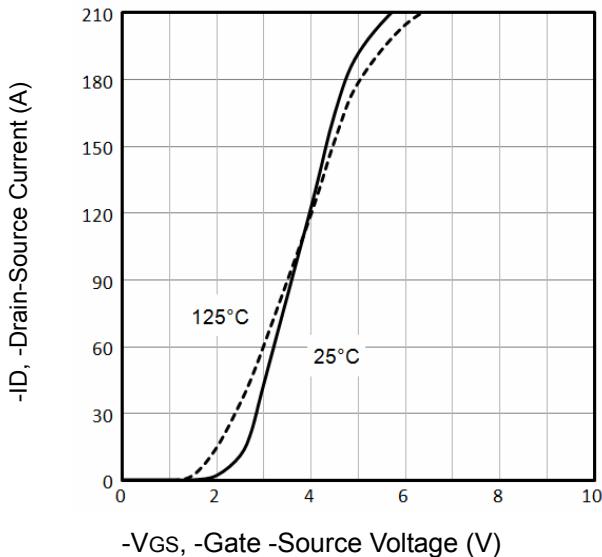


Fig3. Typical Transfer Characteristics

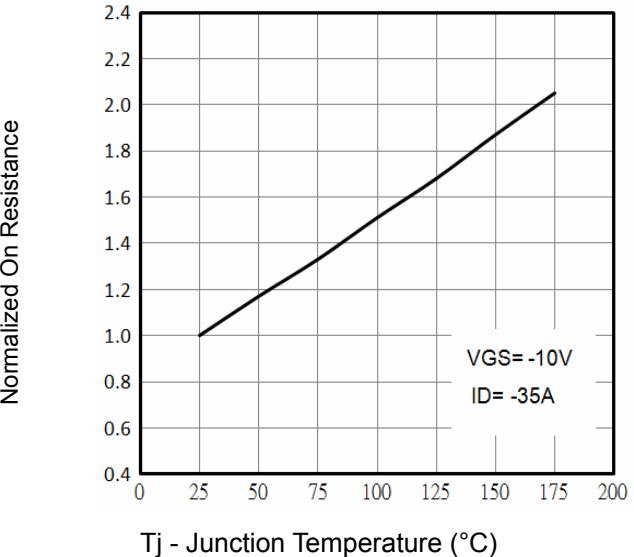


Fig4. Normalized On-Resistance Vs. Temperature

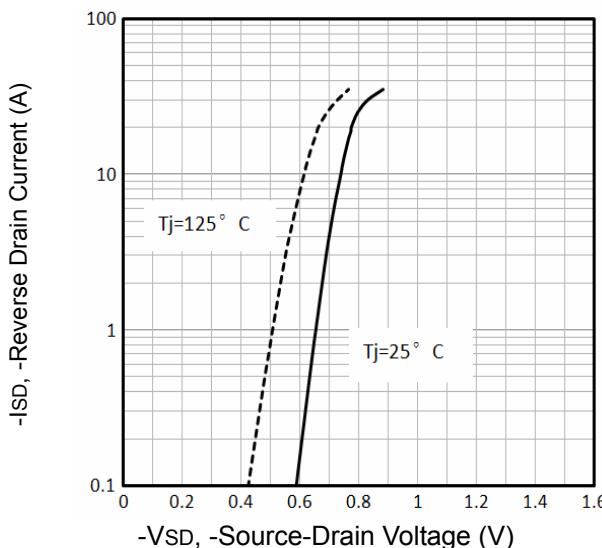


Fig5. Typical Source-Drain Diode Forward Voltage



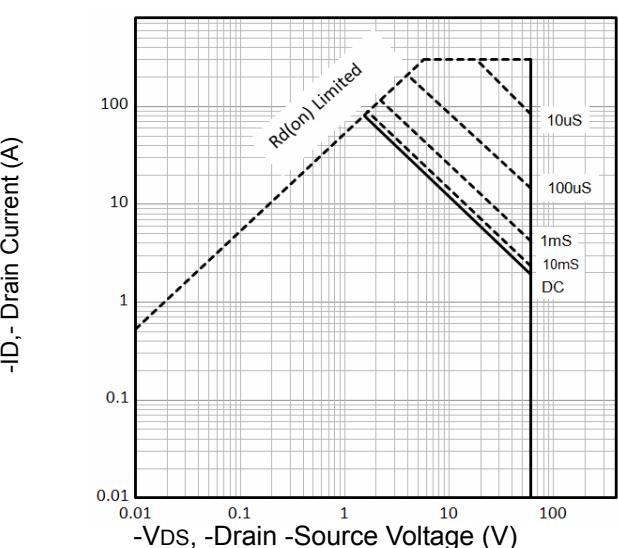


Fig6. Maximum Safe Operating Area


### Typical Characteristics

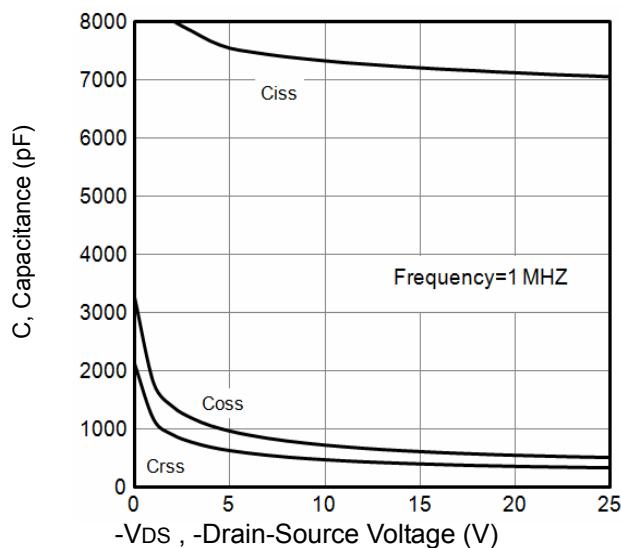


**Fig7.** Typical Capacitance Vs.Drain-Source Voltage

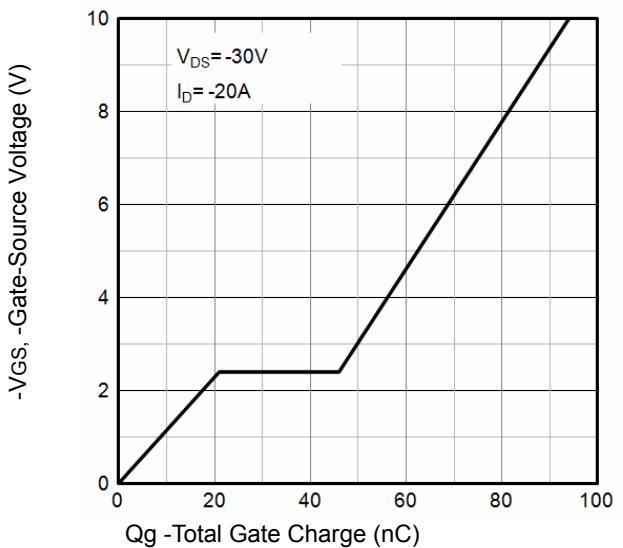


**Fig8.** Typical Gate Charge Vs.Gate-Source Voltage

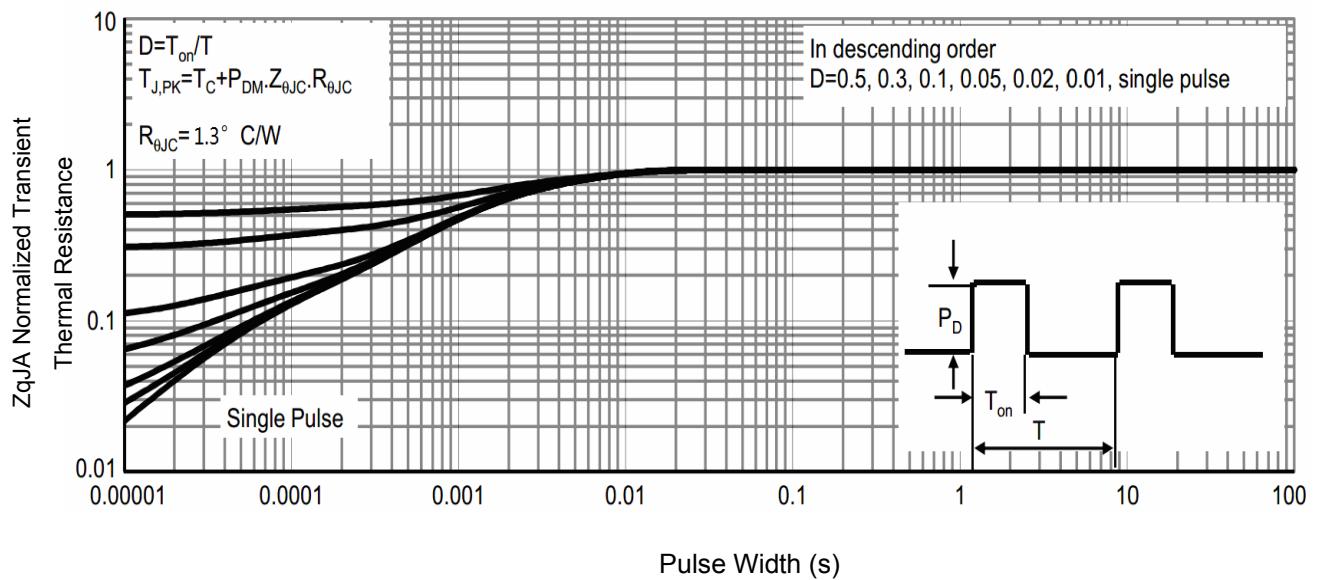

**Fig9.** Normalized Maximum Transient Thermal Impedance T<sub>j</sub> -Junction

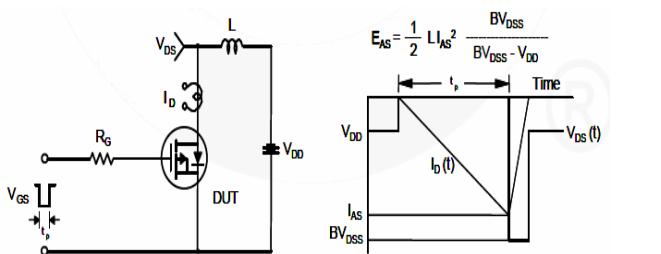


**Fig10.** Unclamped Inductive Test Circuit and Waveforms

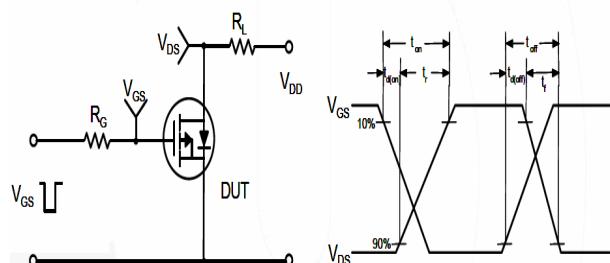

**Fig11.** Switching Time Test Circuit and waveforms

### PDFN5×6 Package Outline Data

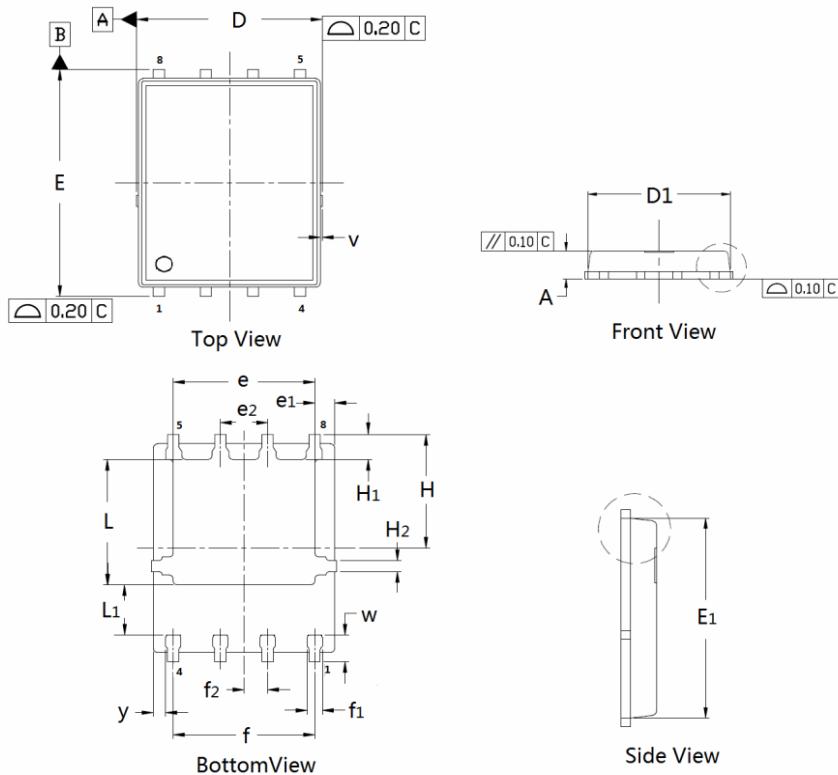

**DIMENSIONS ( unit : mm )**

Symbol	Min	Typ	Max	Symbol	Min	Typ	Max
A	0.90	1.02	1.10	D	4.90	4.98	5.10
D <sub>1</sub>	4.80	4.89	5.00	E	6.00	6.11	6.20
E <sub>1</sub>	5.65	5.74	5.85	e	3.72	3.80	3.92
e <sub>1</sub>	--	0.54	--	e <sub>2</sub>	--	1.27	--
f	--	3.82	--	f <sub>1</sub>	0.31	0.37	0.51
f <sub>2</sub>	--	0.64	--	H	--	3.15	--
H <sub>1</sub>	0.59	0.63	0.79	H <sub>2</sub>	0.26	0.28	0.32
L	3.38	3.45	3.58	L <sub>1</sub>	--	1.39	--
v	--	0.13	--	w	0.64	0.68	0.84
y	--	0.34	--		--		--

### Customer Service

Sales and Service:

[sales@vgsemi.com](mailto:sales@vgsemi.com)

**Vanguard Semiconductor CO., LTD**

**TEL:** (86-755)-26902410

**FAX:** (86-755)-26907027

**WEB:** [www.vgsemi.com](http://www.vgsemi.com)