

FEATURES

- Compact tubular package.
- Photolithographic process.
- Excellent shock resistance and environmental characteristics.
- RoHS compliant (complete Pb-free).

APPLICATIONS

- Real Time Clocks, Timers, Pagers, Cameras, Remote-Controllers, Portable Applications

www.DataSheet4U.com


STANDARD SPECIFICATIONS

Conditions without notice (Temperature: +25±2°C, DL: 0.1μW)

Item	Symbol	Specifications	Conditions / Notes
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	(±5 x 10 ⁻⁶), ±10 x 10 ⁻⁶ , ±20 x 10 ⁻⁶	
Turnover Temperature	Ti	+25±5°C	
Parabolic Coefficient	B	(-3.5±0.8) x 10 ⁻⁸ /°C ²	
Load Capacitance	CL	4.5 to 12.5pF	
Motional Resistance (ESR)	R1 typ./max.	30kΩ / 50kΩ	
Absolute Maximum Drive Level	DLmax	1μW	
Level of Drive	DL	0.1μW	
Shunt Capacitance	C0	0.9pF typ.	
Frequency Ageing	f_age	±5 x 10 ⁻⁶	+25±3°C, First Year
Operating Temperature	T_use	-10°C to +60°C	
Storage Temperature	T_stg	-30°C to +70°C	Store a pcs. part


DIMENSIONS

VT-150-F

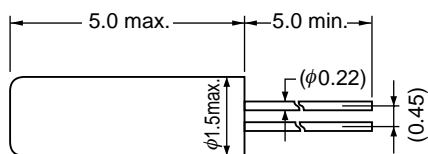

UNIT: mm

VT-200-F

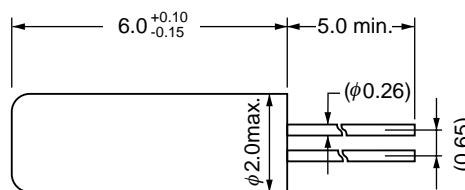

UNIT: mm