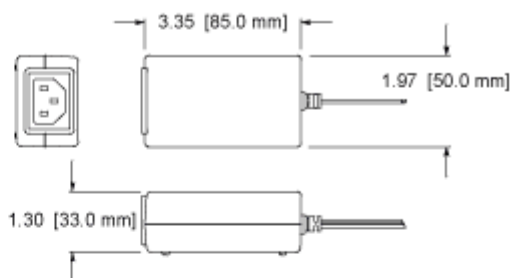


W15**15 Watt - Single Output Regulated Power Supplies****Features:**

Wide Range AC input
Fully enclosed plastic case
Fully regulated output
High Efficiency
Warranty: 5 years

Environmental


Operating temperature....0° C to 40° C
Storage temperature.....-20° C to 85° C
Weight: 0.8 lbs

EMI

Meets FCC class B, CISPR 22 class B

Safety

UL 1950
cUL to CSA 950
CE mark
TUV licensed to EN60950

Polarity: COM  +V

Electrical specifications**Input**

Voltage.....100-240VAC(90-264VAC)
Current.....1A max @ 90VAC
Frequency.....47-63 Hz
A/C cord.....Included - 6 foot cord
Input connector.....3 Pin IEC 320 receptacle

Output

Line regulation.....TYP 1%
Load regulation.....5% Max
Set point.....5% of rated output
Hold up time.....20 ms min. at full load, 115 VAC
Over voltage protection.....Built-in
Over current protection.....Built-in
Short circuit protection.....Pulsing mode, auto recovery
Ripple/noise(Vp-p).....1%
Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

Output Electrical Specifications

Model No.	Voltage	Power	Current
W1507-760	7	15	2.1A
W1515-760	15	15	1



ELPAC POWER SYSTEMS (949) 476-6070, www.elpac.com, sales@elpac.com

29

[Quality Power Supplies](#) | [Agency Certifications](#) | [Output Connectors](#) | [Custom Requests](#) | [About Us](#) | [Quality Management Team](#) | [Job Opportunities](#) | [Elpac News](#) | [Sales Representatives](#) | [Distributors](#) | [Catalog Request](#)
[Power Supplies](#) | [External Power Supplies](#) | [Open Frame Power Supplies](#) | [Medical Power Supplies](#) | [Customer Support](#)

