



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

MODULE NO.: WF0096ATYAA3DNF10#

General Specifications

Item	Dimension	Unit
Size	0.96	inch
Dot Matrix	80 x RGB x 160(TFT)	dots
Module dimension	18.7 (W) x 31.9 (H) x 2.64 (D)	mm
Active area	10.8 x 21.696	mm
Dot pitch	0.135 x 0.1356	mm
LCD type	TFT, Normally black, Transmissive	
Viewing Angle	80/80/80/80	
Aspect Ratio	1:2	
IC	ST7735S or equivalent	
TFT Interface	SPI Interface	
Backlight Type	LED, Normally White	
PCAP Interface	I2C	
PCAP IC	FT3267 or equivalent	
PCAP FW Version	V06	
Touch Panel	With PCAP	
Surface	Glare	

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

1. Operating conditions:

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.0	3.3	3.6	V
Supply LCM current	ICC	—	2	3	mA
Supply PCAP	VDDT	2.8	—	3.3	V
	I _{VDDT}	—	2	3	mA

2. LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
LED current	I _{LED}	—	20	—	mA
LED voltage	V _{LED}	2.8	3.0	3.2	V
LED Life Time		50000	—	—	Hr

Interface


1. LCM PIN Definition

Pin	Symbol	Function
1	SPI4W	SPI4W='0', 3-wire SPI. SPI4W='1', 4-wire SPI.
2	NC	No connection
3	SDA	Serial interface data
4	SCL	Serial interface clock
5	RS	Data/command selection pin (4-wire SPI use)
6	RES	Reset pin (low active)
7	CS	Chip selection pin (low active)
8	GND	Ground
9	NC	No connection
10	VCC	Power supply.
11	VLED-	Back light cathode
12	VLED+	Back light anode
13	GND	Ground

2. CTP PIN Definition

Pin	Symbol	Function
1	VDDT	Power supply
2	SCL	IIC clock signal. Must be pulled high
3	SDA	IIC data signal. Must be pulled high.
4	INT	External interrupt to the host
5	RESET	External Reset. Low is active
6	VSS	Power ground.

Contour Drawing

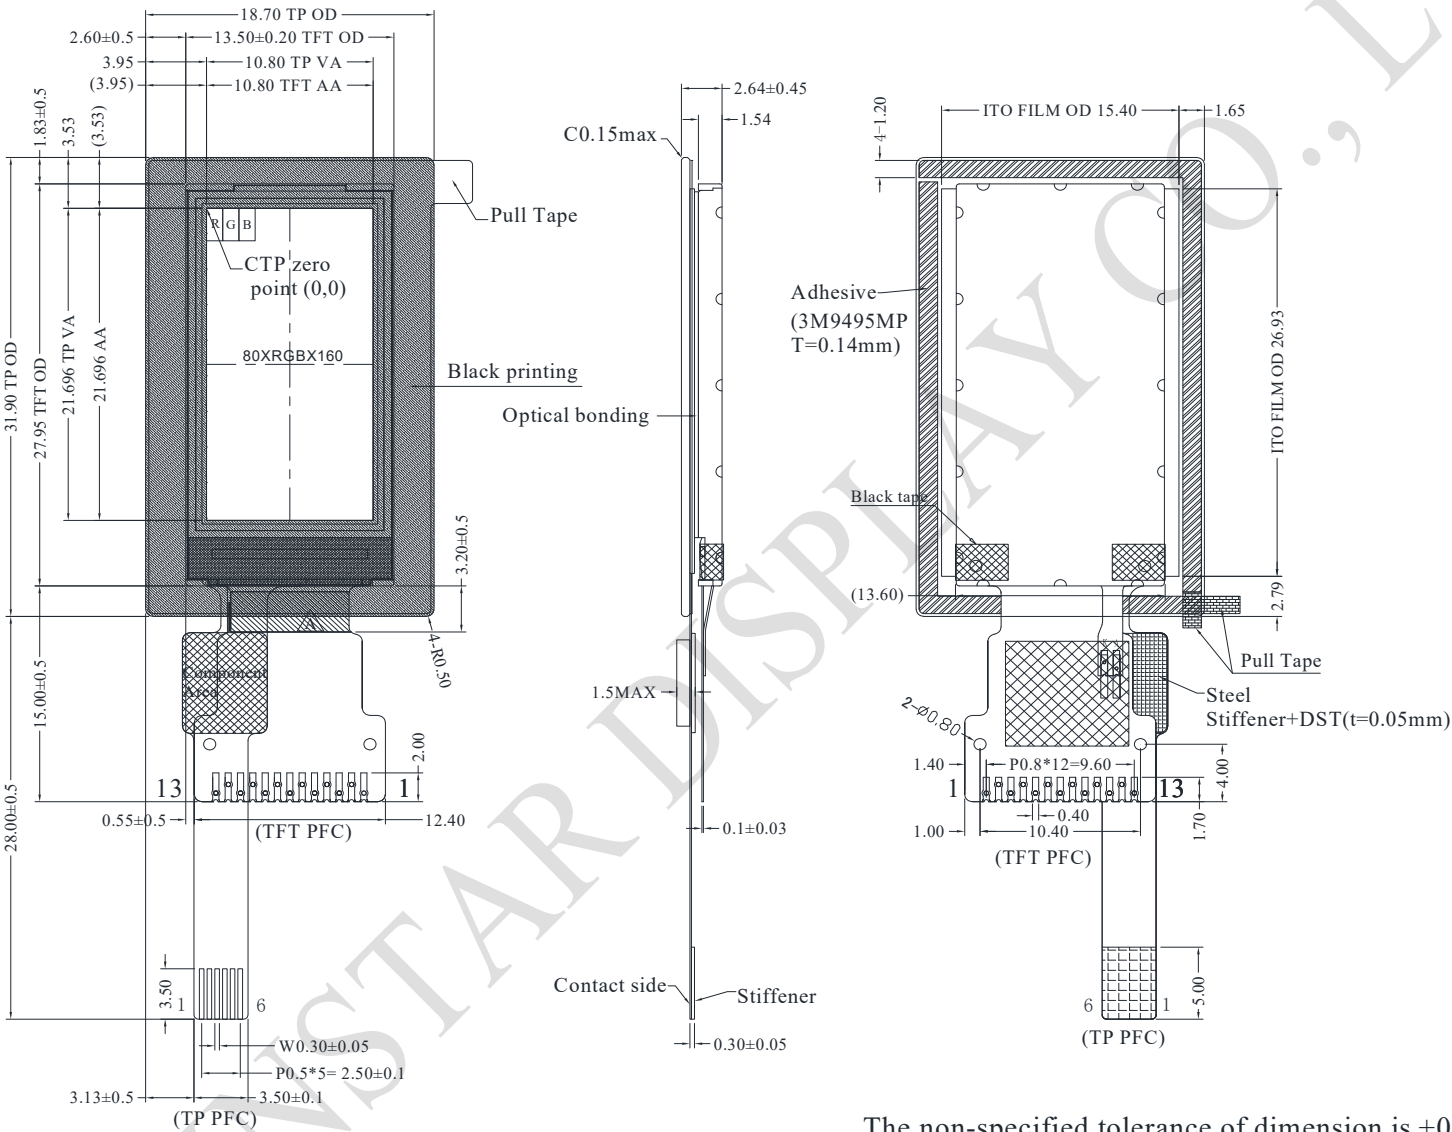

TFT PFC

PIN NO.	SYMBOL
1	SPI4W
2	NC
3	SDA
4	SCL
5	RS
6	RES
7	CS
8	GND
9	NC
10	VCC
11	VLED-
12	VLED+
13	GND

TP PFC

PIN NO.	SYMBOL
1	VDDT
2	SCL
3	SDA
4	INT
5	RESET
6	VSS

The non-specified tolerance of dimension is ± 0.3 mm .