



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

### SPECIFICATION

**MODULE NO.: WF150ATYAMLNN0#**

### General Specifications

Item	Dimension	Unit
Size	15.0	inch
Dot Matrix	1024 x RGB x 768 (TFT)	dots
Module dimension	326.5 x 253.5 x 9.1	mm
Active area	304.1 x 228.1	mm
Dot pitch	0.297 x 0.297	mm
LCD type	TFT, Normally Black, Transmissive	
Viewing Angle	88/88/88/88	
Backlight Type	LED, Normally White	
Interface	LVDS	
Touch Panel	Without Touch Panel	
Surface	Anti-Glare	

\*Color tone slight changed by temperature and driving voltage.

# Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+70	°C

# Electrical Characteristics

## TFT LCD MODULE


Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Power Supply Voltage	VCC	3.0	3.3	3.6	V
Ripple Voltage	VRP	-	-	100	mVp-p
Rush Current	IRUSH	-	-	(2.0)	A
Power Supply Current	White	-	(800)	(960)	mA
	Black	-	(670)	(800)	mA
LVDS differential input voltage	Vid	200	-	600	mV
LVDS common input voltage	Vic	1.0	1.2	1.4	V
Differential Input Voltage for LVDS Receiver Threshold	"H" Level	-	-	100	mV
	"L" Level	-100	-	-	mV
Terminating Resistor	RT	-	100	-	Ohm

# Interface


## LCM PIN Definition

Pin No.	Symbol	Function	Polarity
1	VCC	Power Supply +3.3V(typical)	
2	VCC	Power Supply +3.3V(typical)	
3	NC	No Connction (Reserve for INX test)	
4	LR/UD	Reverse Scan Control H or NC = Normal Mode. L = Horizontal/ Vertical Reverse Scan.	
5	RX0-	LVDS Differential Data Input	Negative
6	RX0+	LVDS Differential Data Input	Positive
7	GND	Ground	
8	RX1-	LVDS Differential Data Input	Negative
9	RX1+	LVDS Differential Data Input	Positive
10	NC	No Connction (Reserve for INX test)	
11	RX2-	LVDS Differential Data Input	Negative
12	RX2+	LVDS Differential Data Input	Positive
13	GND	Ground	
14	RXCLK-	LVDS Differential Data Input	Negative
15	RXCLK+	LVDS Differential Data Input	Positive
16	GND	Ground	
17	RX3-	LVDS Differential Data Input	Negative
18	RX3+	LVDS Differential Data Input	Positive
19	NC	No Connction (Reserve for INX test)	
20	SEL68	LVDS 6/8 bit select function control, High → 6bit Input Mode Low or NC → 8bit Input Mode	

# Contour Drawing

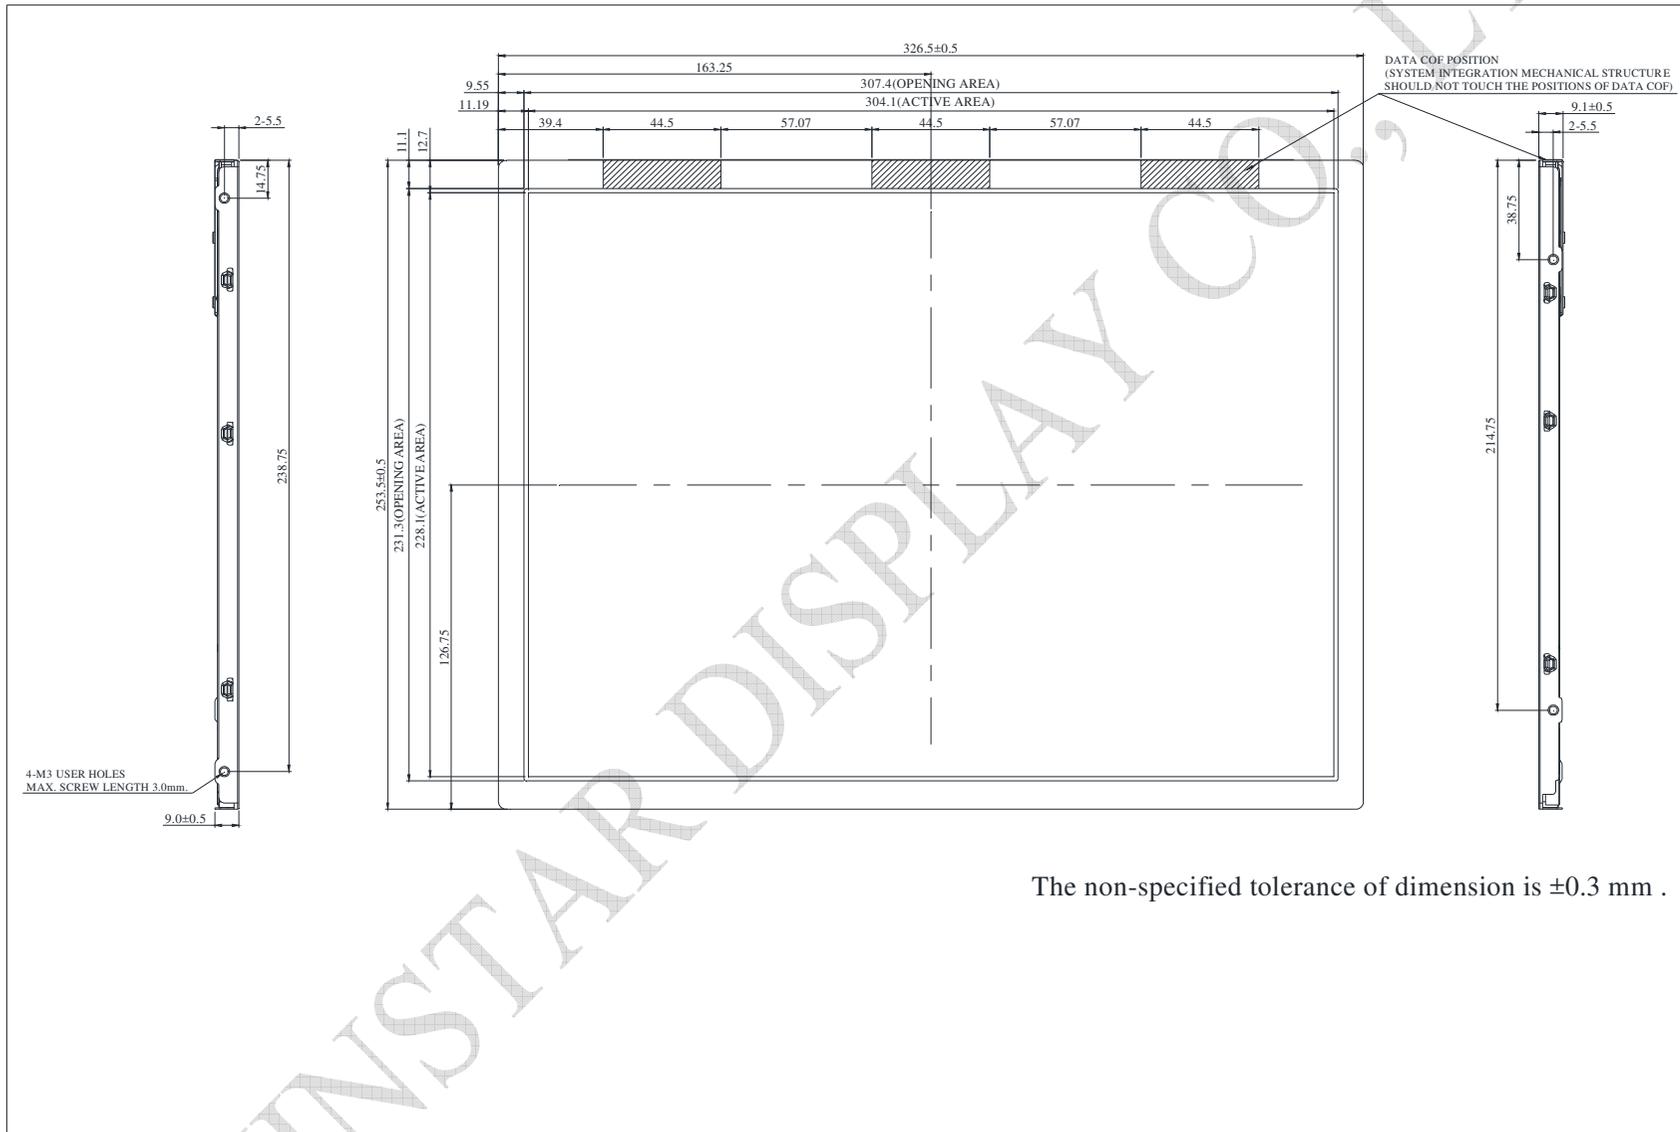

The non-specified tolerance of dimension is  $\pm 0.3$  mm .

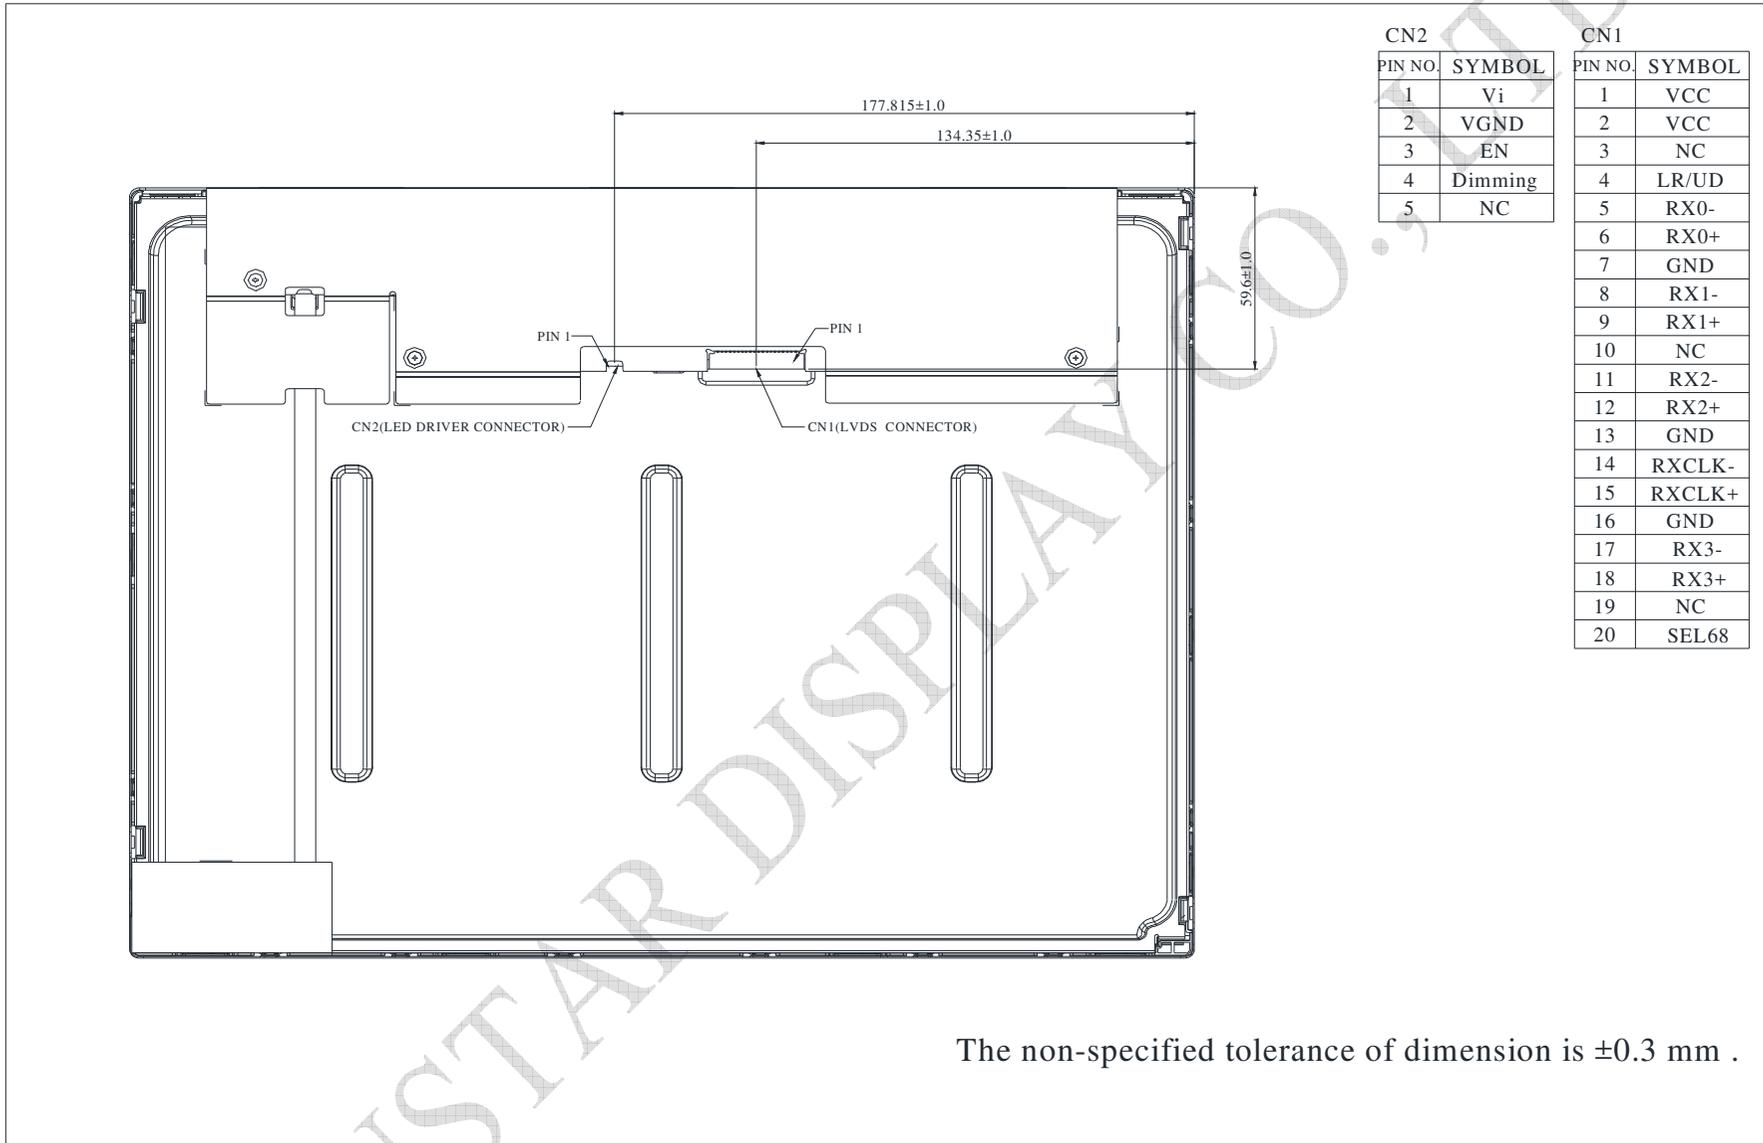

CN2	
PIN NO.	SYMBOL
1	Vi
2	VGND
3	EN
4	Dimming
5	NC

CN1	
PIN NO.	SYMBOL
1	VCC
2	VCC
3	NC
4	LR/UD
5	RX0-
6	RX0+
7	GND
8	RX1-
9	RX1+
10	NC
11	RX2-
12	RX2+
13	GND
14	RXCLK-
15	RXCLK+
16	GND
17	RX3-
18	RX3+
19	NC
20	SEL68

The non-specified tolerance of dimension is  $\pm 0.3$  mm .