



SPECIFICATION

MODULE NO.: WF70D3TIAGDNT0#

General Specifications

| Item | Dimension | Unit |
|--------------------------------|------------------------------------|------|
| Size | 7.0 | inch |
| Dot Matrix | 800 x RGB x 480 (TFT) | dots |
| Module dimension | 165 x 100.0 x 7.2 | mm |
| Active area | 154.08 x 85.92 | mm |
| Pixel Pitch | 0.1926 x 0.179 | mm |
| LCD type | TFT, Normally White, Transmissive | |
| View Direction | 12 o'clock | |
| Gray Scale Inversion Direction | 6 o'clock | |
| Aspect Ratio | 16:9 | |
| Backlight Type | LED ,Normally White | |
| Color arrangement | RGB- Stripe | |
| TFT Driver IC | ILI6137A +ILI5960-9G or equivalent | |
| TFT Interface | 24-bit RGB | |
| Touch Panel | Resistive Touch Panel | |
| Surface | Glare | |

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

| Item | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP | -20 | — | +70 | °C |
| Storage Temperature | TST | -30 | — | +80 | °C |

Electrical Characteristics

1. Operating conditions:

| Item | Symbol | Min | Typ | Max | Unit |
|--------------------------|-----------|-------|------|------|------|
| Supply Voltage For Logic | VCC | 3.0 | 3.3 | 3.6 | V |
| Power voltage | AVDD | 10.2 | 10.4 | 10.6 | V |
| Power Supply For Current | VCC =3.3V | - | 3.1 | - | mA |
| Power voltage | VGH | 14.5 | 15.0 | 15.5 | V |
| Power voltage | VGL | -10.5 | -10 | -9.5 | V |
| Input signal voltage | VCOM | 3.54 | 4.04 | 4.54 | V |
| Power AVDD For Current | IADD | - | 13.7 | - | mA |
| Power VGH For Current | IGH | - | 0.57 | - | mA |
| Power VGL For Current | IGL | - | 0.63 | - | mA |
| Power VCOM For Current | ICOM | - | 0.03 | - | mA |

2. LED driving conditions

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|-------------------|-------------------|--------|------|------|------|
| LED current | I _{LED} | - | 180 | - | mA |
| Power Consumption | - | 1512 | 1764 | 1980 | mW |
| LED voltage | V _{LED+} | 8.4 | 9.8 | 11.0 | V |
| LED Life Time | - | 50,000 | | - | Hr |

Interface


1. LCM PIN Definition

| Pin | Symbol | Function |
|-----|--------|-----------------------------|
| 1 | VLED+ | Power supply for backlight |
| 2 | VLED+ | Power supply for backlight |
| 3 | VLED- | Backlight ground |
| 4 | VLED- | Backlight ground |
| 5 | GND | Power ground |
| 6 | VCOM | Common voltage |
| 7 | VCC | Power for Digital Circuit |
| 8 | MODE | DE/SYNC mode select |
| 9 | DE | Data Input Enable (DEN) |
| 10 | VS | Vertical Sync Input (VSD) |
| 11 | HS | Horizontal Sync Input (HSD) |
| 12 | B7 | Blue data(MSB) |
| 13 | B6 | Blue data |
| 14 | B5 | Blue data |
| 15 | B4 | Blue data |
| 16 | B3 | Blue data |
| 17 | B2 | Blue data |
| 18 | B1 | Blue data |
| 19 | B0 | Blue data(LSB) |
| 20 | G7 | Green data(MSB) |
| 21 | G6 | Green data |
| 22 | G5 | Green data |
| 23 | G4 | Green data |
| 24 | G3 | Green data |
| 25 | G2 | Green data |
| 26 | G1 | Green data |
| 27 | G0 | Green data(LSB) |
| 28 | R7 | Red data(MSB) |
| 29 | R6 | Red data |
| 30 | R5 | Red data |
| 31 | R4 | Red data |

| | | |
|----|-------|--------------------------|
| 32 | R3 | Red data |
| 33 | R2 | Red data |
| 34 | R1 | Red data |
| 35 | R0 | Red data(LSB) |
| 36 | GND | Power Ground |
| 37 | DCLK | Sample clock (CLK) |
| 38 | GND | Power Ground |
| 39 | L/R | Left / right selection |
| 40 | U/D | Up/down selection |
| 41 | VGH | Gate ON Voltage |
| 42 | VGL | Gate OFF Voltage |
| 43 | AVDD | Power for Analog Circuit |
| 44 | RESET | Global reset pin. |
| 45 | NC | No connection |
| 46 | VCOM | Common Voltage |
| 47 | DITHB | Dithering function |
| 48 | GND | Power Ground |
| 49 | NC | No connection |
| 50 | NC | No connection |

I: input, O: output, P: Power

Contour Drawing

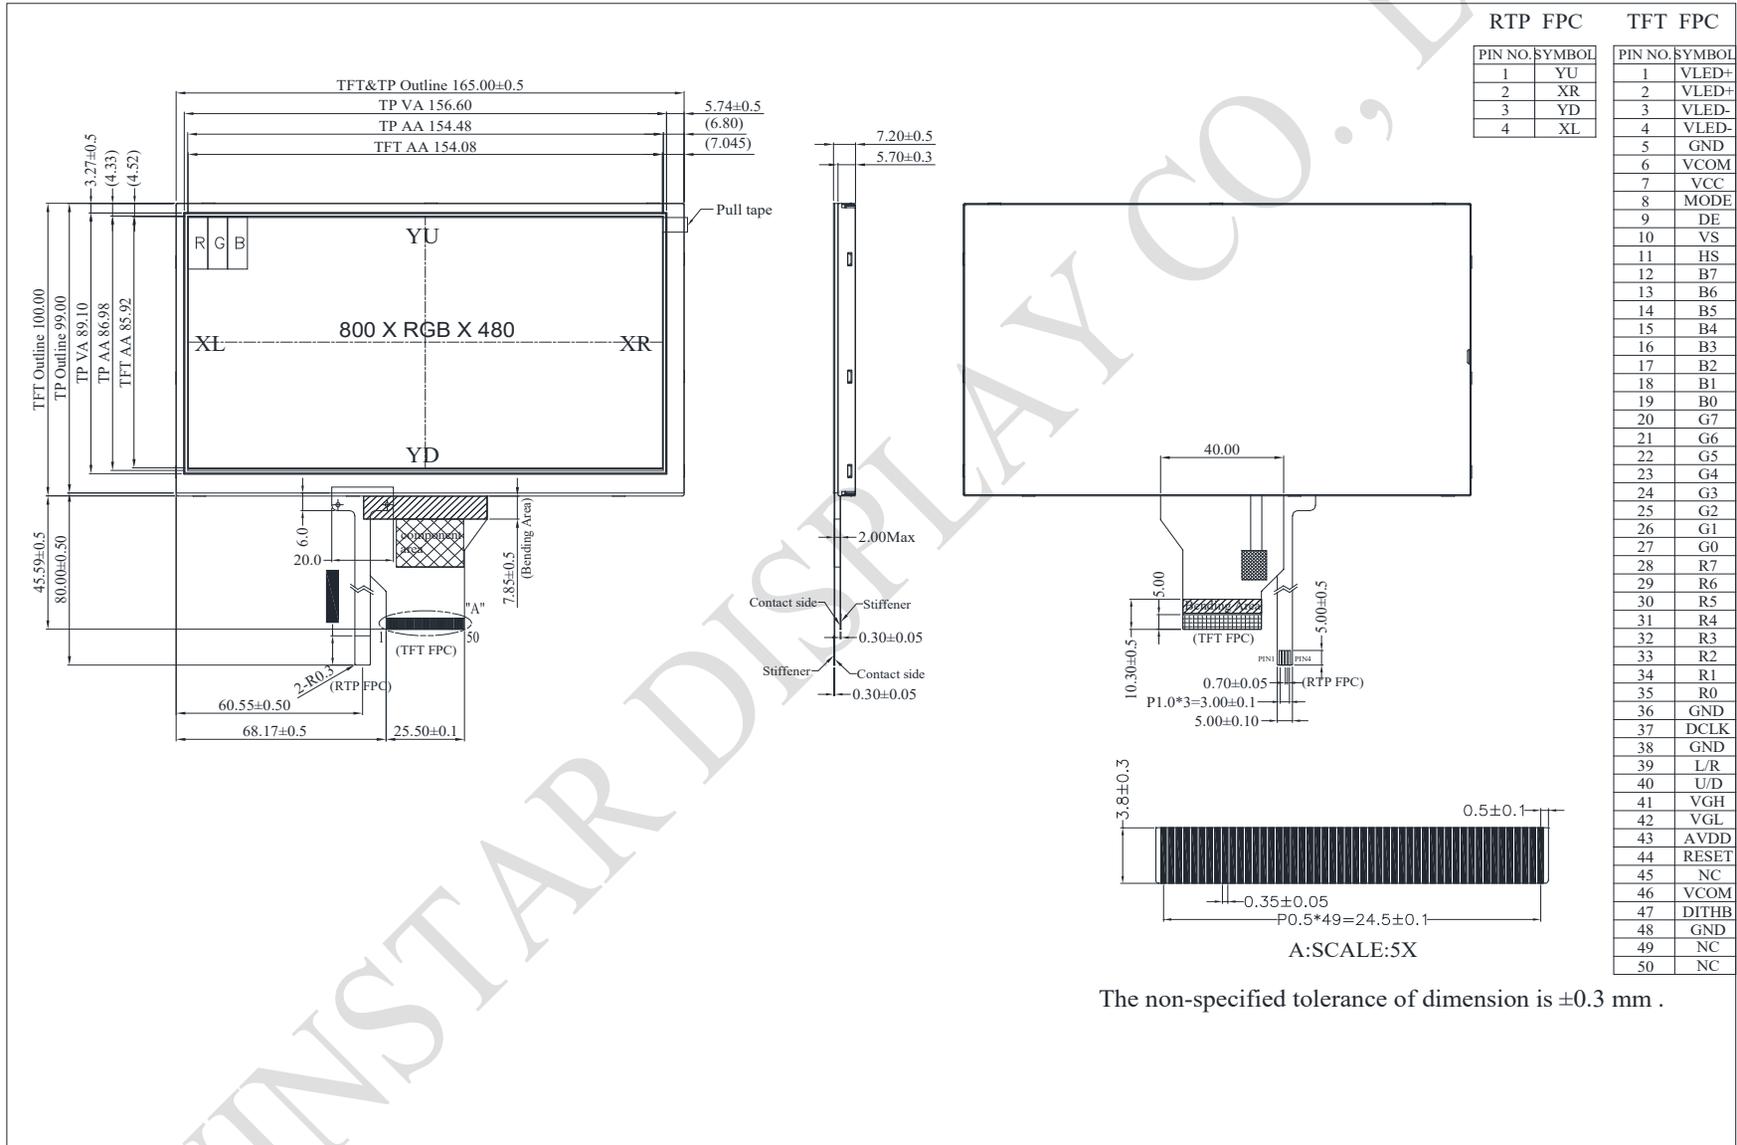

The non-specified tolerance of dimension is ±0.3 mm .