


**Features**

- 1.2A,600V,  $R_{DS(on)}$ (Max8.5Ω) $@V_{GS}=10V$
- Ultra-low Gate charge(Typical 9.1nC)
- Fast Switching Capability
- 100%Avalanche Tested
- Maximum Junction Temperature Range(150 °C)

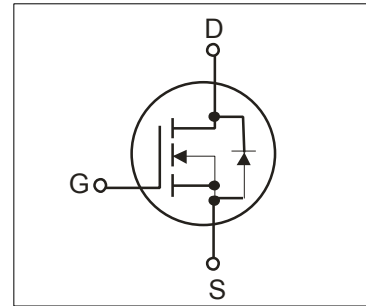

**General Description**

This Power MOSFET is produced using Winsemi's advanced planar stripe, VDMOS technology. This latest technology has been especially designed to minimize on-state resistance, have a high rugged avalanche characteristics. This device is specially well suited for high efficiency switch mode power supply, electronic Lamp ballasts based on half bridge and UPS.



**Absolute Maximum Ratings**

Symbol	Parameter	Value	Units
$V_{DSS}$	Drain Source Voltage	600	V
$I_D$	Continuous Drain Current(@Tc=25°C)	1.2	A
	Continuous Drain Current(@Tc=100°C)	0.84	A
$I_{DM}$	Drain Current Pulsed (Note1)	5.0	A
$V_{GS}$	Gate to Source Voltage	±30	V
$E_{AS}$	Single Pulsed Avalanche Energy (Note2)	78	mJ
$E_{AR}$	Repetitive Avalanche Energy (Note1)	3.9	mJ
dv/dt	Peak Diode Recovery dv /dt (Note3)	5.5	V/ ns
$P_D$	Total Power Dissipation(@Tc=25°C)	30	W
	Derating Factor above 25°C	0.05	W/°C
$T_J, T_{stg}$	Junction and Storage Temperature	-55~150	°C
$T_L$	Channel Temperature	300	°C

**Thermal Characteristics**

Symbol	Parameter	Value			Units
		Min	Typ	Max	
$R_{QJC}$	Thermal Resistance , Junction -to -Case	-	-	4.17	°C/W
$R_{QJA}$	Thermal Resistance , Junction-to -Ambient	-	-	120	°C/W

## Electrical Characteristics(Tc=25°C)

Characteristics		Symbol	Test Condition	Min	Type	Max	Unit
Gate leakage current		I <sub>GSS</sub>	V <sub>GS</sub> =±30V, V <sub>DS</sub> =0V	-	-	±100	nA
Gate-source breakdown voltage		V <sub>(BR)GSS</sub>	I <sub>G</sub> =±10 μA, V <sub>DS</sub> =0V	±30	-	-	V
Drain cut -off current		I <sub>DSS</sub>	V <sub>DS</sub> =600V, V <sub>GS</sub> =0V	-	-	10	μA
			V <sub>DS</sub> =480V, TC=125°C	-	-	100	μA
Drain -source breakdown voltage		V <sub>(BR)DSS</sub>	I <sub>D</sub> =250 μA, V <sub>GS</sub> =0V	600	-	-	V
Breakdown voltage Temperature Coefficient		ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>	I <sub>D</sub> =1mA, Referenced to 25°C	-	0.65	-	V/°C
Gate threshold voltage		V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250 μA	2.0	-	4.0	V
Drain -source ON resistance		R <sub>DS(ON)</sub>	V <sub>GS</sub> =10V, I <sub>D</sub> =0.6A	-	7.7	8.5	Ω
Forward Transconductance		g <sub>fs</sub>	V <sub>DS</sub> =40V, I <sub>D</sub> =0.6A	-	1.3	-	S
Input capacitance		C <sub>iss</sub>	V <sub>DS</sub> =25V,	-	247	319	pF
Reverse transfer capacitance		C <sub>rss</sub>	V <sub>GS</sub> =0V,	-	4.9	6.4	
Output capacitance		C <sub>oss</sub>	f=1MHz	-	23	30	
Switching time	Turn-On Rise time	tr	V <sub>DD</sub> =300V,	-	33	72	ns
	Turn-on delay time	Td(on)	I <sub>D</sub> =1.2A	-	11	26	
	Turn-On Fall time	tf	R <sub>G</sub> =25Ω	-	26	59	
	Turn-off delay time	Td(off)	(Note4,5)	-	26	59	
Total gate charge(gate-source plus gate-drain)		Q <sub>g</sub>	V <sub>DD</sub> =480V, V <sub>GS</sub> =10V,	-	9.1	12	nC
Gate-source charge		Q <sub>gs</sub>	I <sub>D</sub> =1.2A	-	1.2	-	
Gate-drain("miller") Charge		Q <sub>gd</sub>	(Note4,5)	-	4.5	-	

## Source-Drain Ratings and Characteristics(Ta=25°C)

Characteristics	Symbol	Test Condition	Min	Type	Max	Unit
Continuous drain reverse current	I <sub>DR</sub>	-	-	-	1.2	A
Pulse drain reverse current	I <sub>DRP</sub>	-	-	-	5.0	A
Forward voltage(diode)	V <sub>DSF</sub>	I <sub>DR</sub> =1.2A, V <sub>GS</sub> =0V	-	-	1.4	V
Reverse recovery time	trr	I <sub>DR</sub> =1.2A, V <sub>GS</sub> =0V,	-	163	-	ns
Reverse recovery charge	Q <sub>rr</sub>	di <sub>DR</sub> / dt =100 A / μs	-	0.85	-	μC

Note 1.Repeativity rating :pulse width limited by junction temperature

2.L=92mH I<sub>AS</sub>=1.2A, V<sub>DD</sub>=50V, R<sub>G</sub>=25Ω, Starting T<sub>J</sub>=25°C

3.I<sub>SD</sub>≤1.2A, di/dt≤200A/us, V<sub>DD</sub><BV<sub>DSS</sub>, Startiong T<sub>J</sub>=25°C

4.Pulse Test:Pulse Width≤300us, Duty Cycle≤2%

5. Essentially independent of operating temperature.

This transistor is an electrostatic sensitive device

Please handle with caution

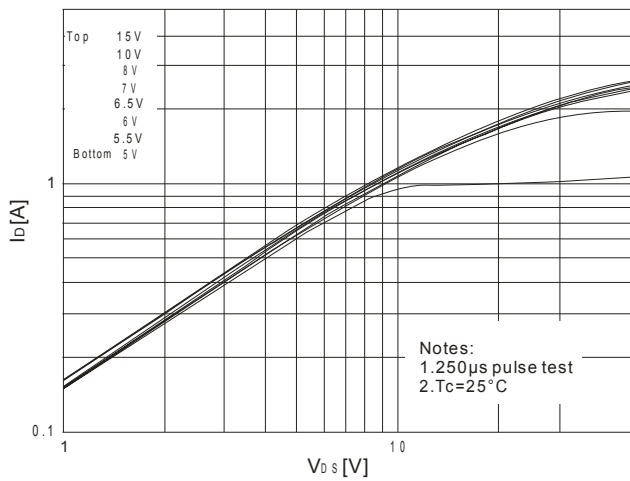


Fig.1 On Region Characteristics

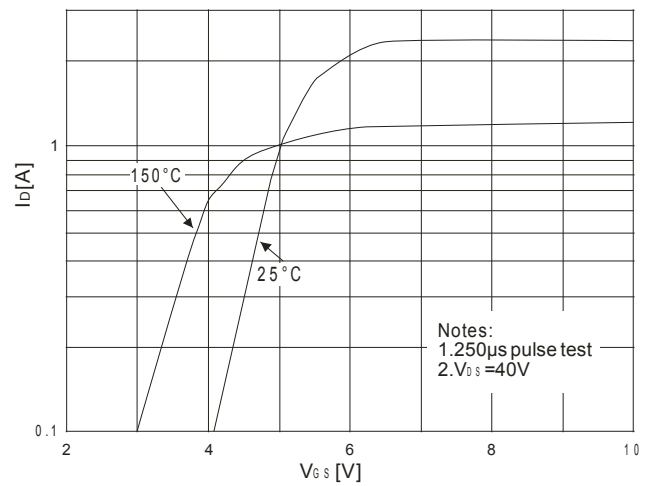


Fig.2 Transfer Characteristics

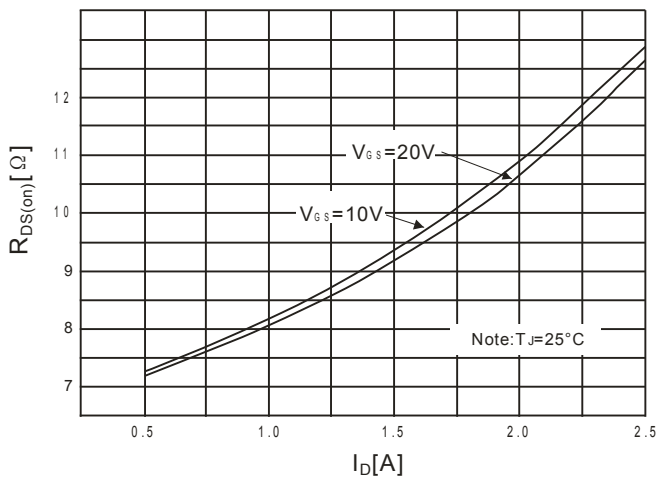


Fig.3 On-Resistance Variation vs Drain current and gate voltage

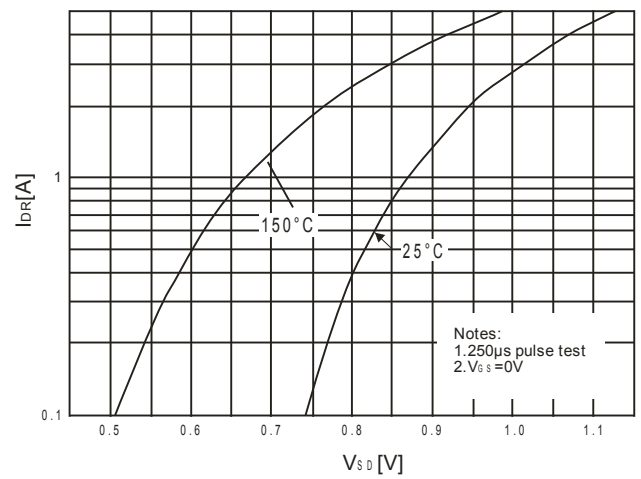


Fig.4 Body diode forward voltage variation vs source current and temperature

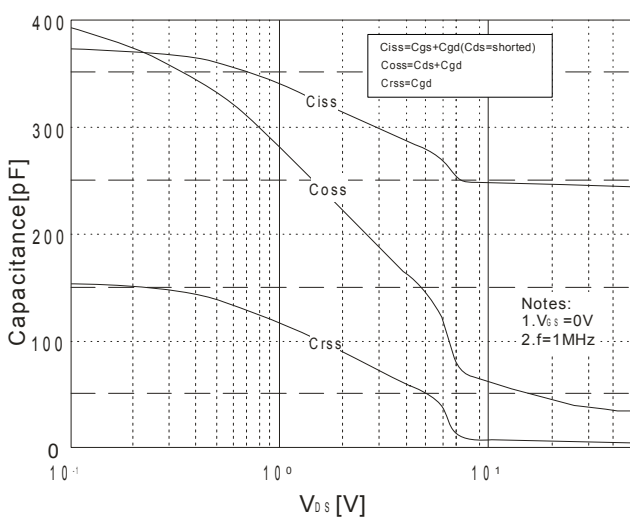


Fig.5 Capacitance characteristics

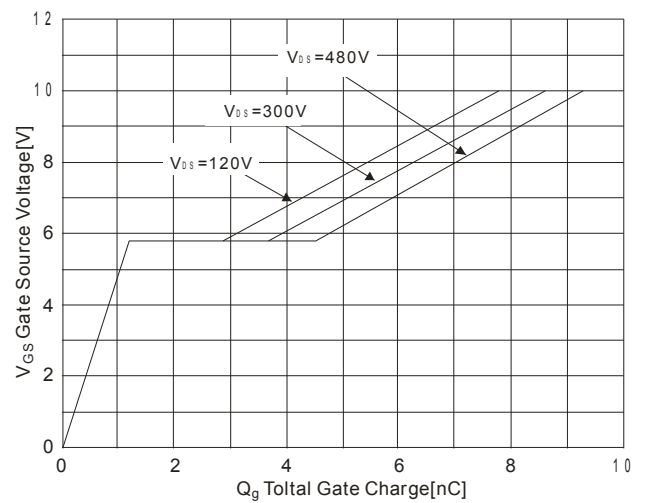


Fig.6 Gate Charge Characteristics

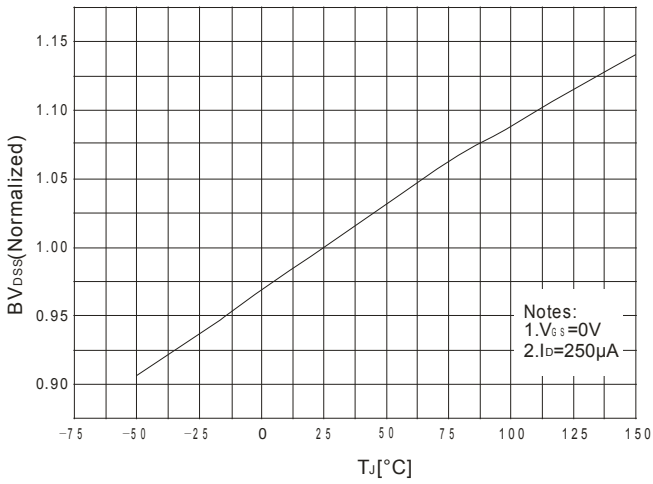


Fig.7 Breakdown voltage variation vs temperature

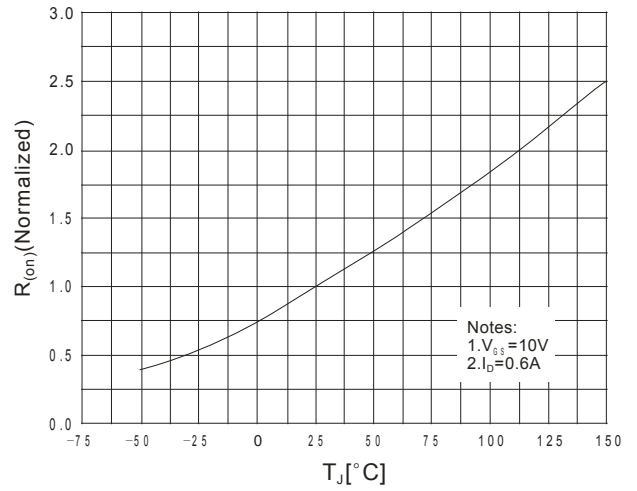


Fig.8 On-Resistance variation vs temperature

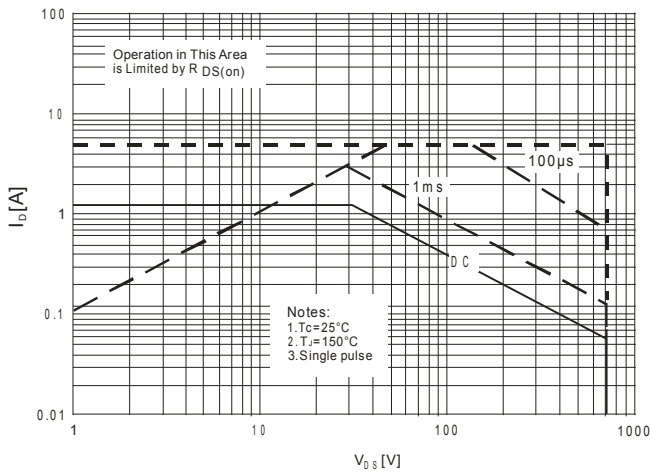


Fig.9 Maximum Safe Operation Area

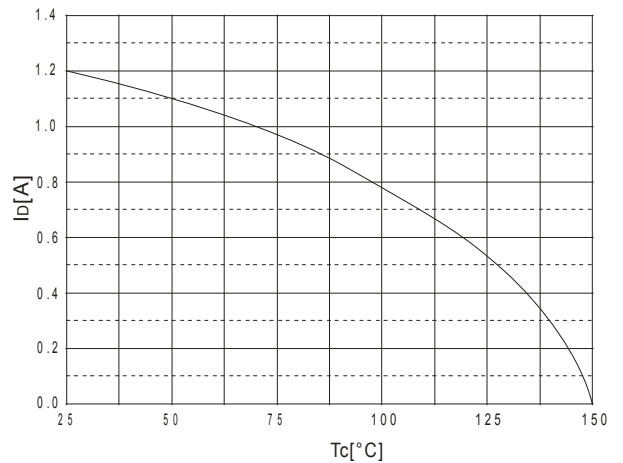


Fig.10 Maximum Drain Current vs Case temperature

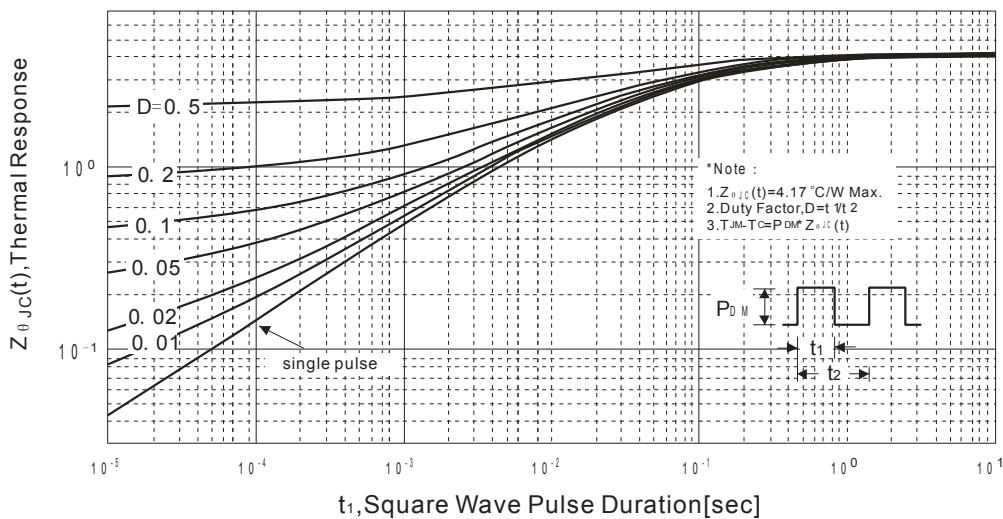


Fig.11 Transient thermal Response Curve

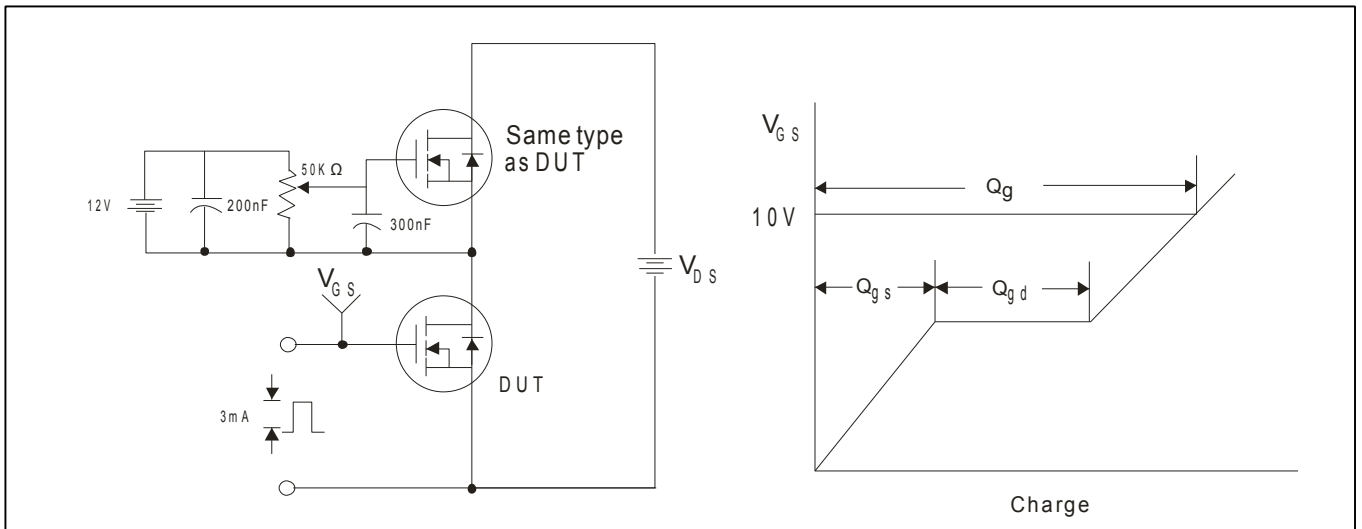


Fig.12 Gate Test circuit & Waveform

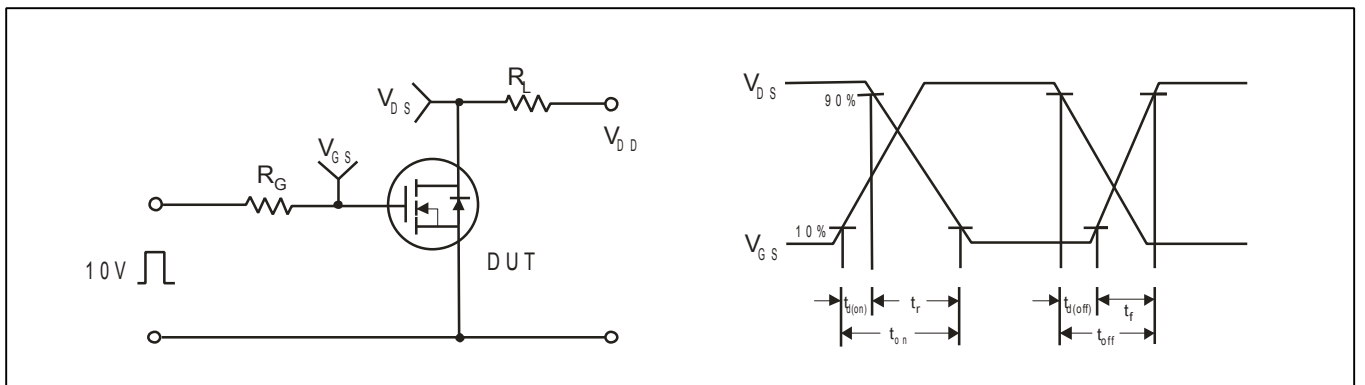


Fig.13 Resistive Switching Test Circuit & Waveform

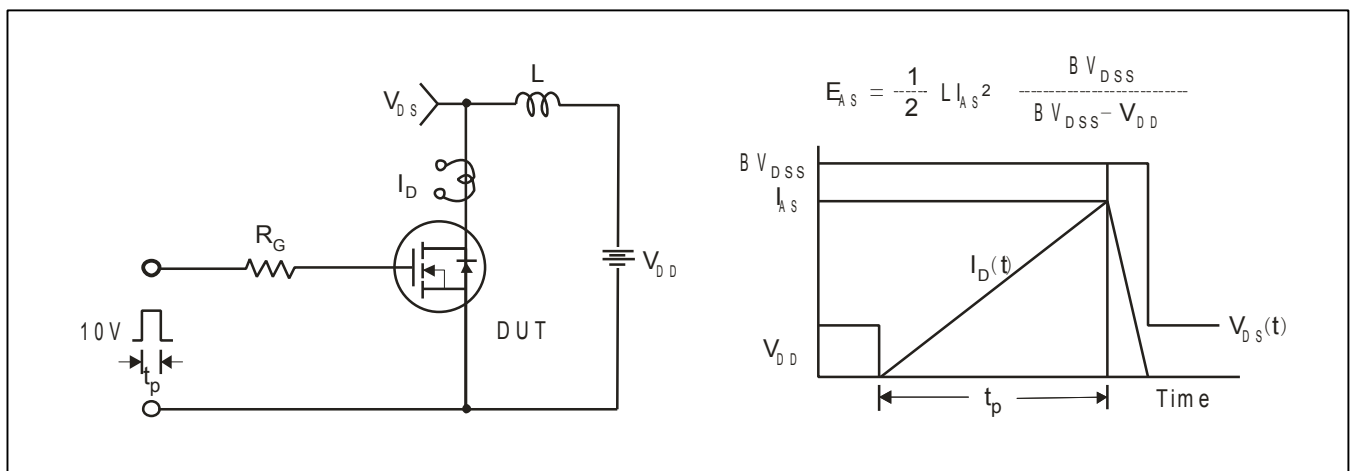


Fig.14 Unclamped Inductive Switching Test Circuit & Waveform


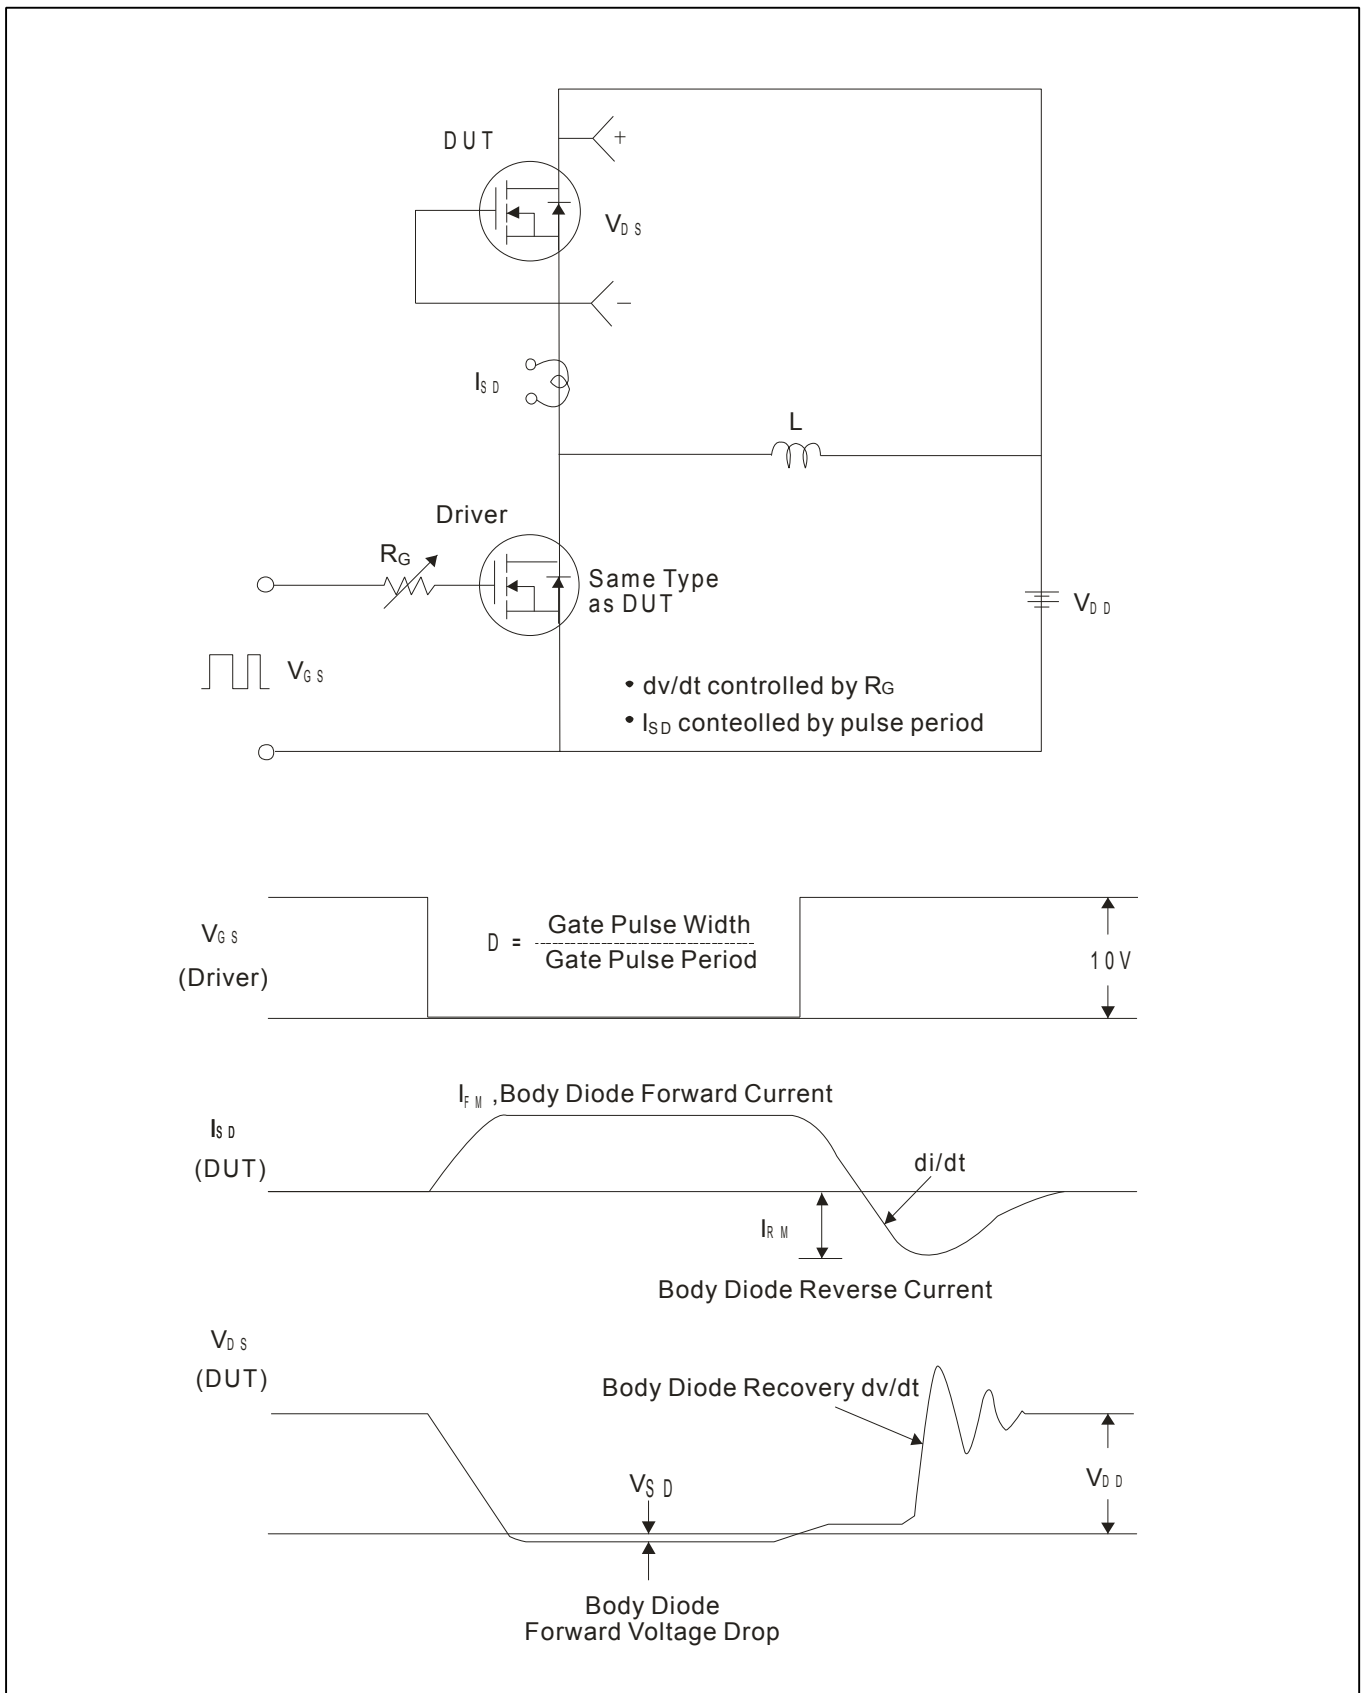


Fig.15 Peak Diode Recovery  $dv/dt$  Test Circuit & Waveform

TO-251 Package Dimension

Unit:mm

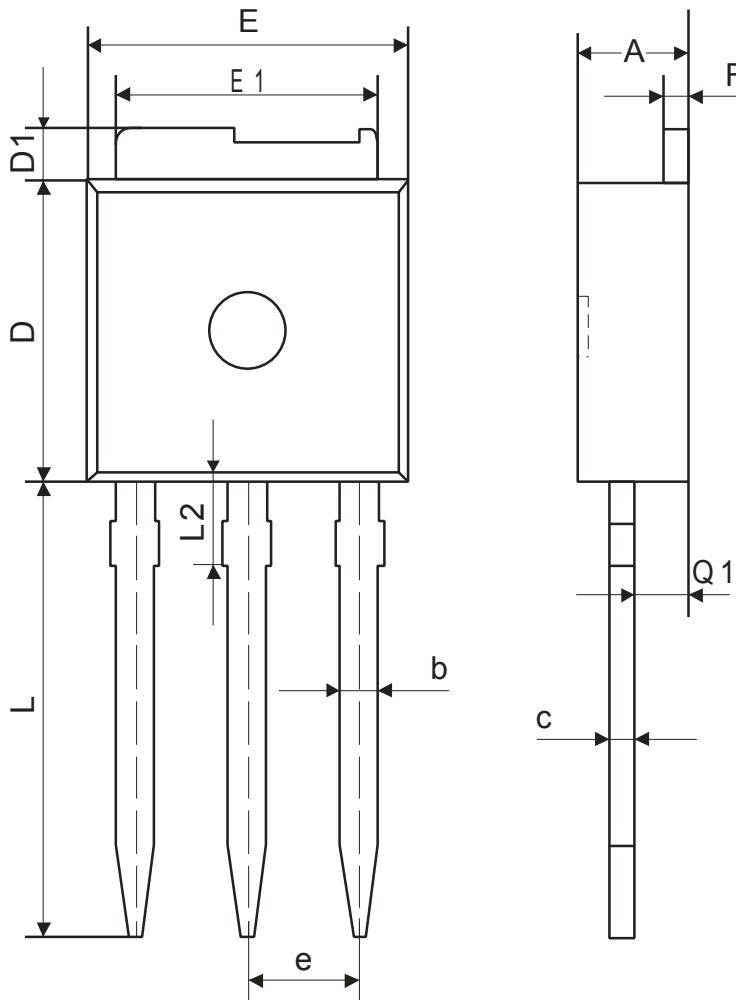

符号 symbol	MIN	MAX
A	2.19	2.38
b	0.64	0.89
c	0.46	0.58
D	5.97	6.22
D1	0.89	1.27
E	6.35	6.73
E1	5.21	5.46
e	2.28TYP	
F	0.46	0.58
L	8.89	9.65
L2	2.25	2.35
Q1	1.02	1.14

**NOTE:**

- 1.We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
- 2.Please do not exceed the absolute maximum ratings of the device when circuit designing.
- 3.Winsemi Microelectronics Co., Ltd reserved the right to make changes in this specification sheet and is subject to change without prior notice.

**CONTACT:**

Winsemi Microelectronics Co., Ltd.

ADD:Futian District, ShenZhen Tian An Cyber Tech Plaza two East Wing 1002

Post Code : 518040

Tel : +86-755-8250 6288

FAX : +86-755-8250 6299

Web Site : [www.winsemi.com](http://www.winsemi.com)