

WL2803D

Ultra low dropout, 800mA, CMOS LDO

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)

Descriptions

The WL2803D series are ultra low dropout, Low quiescent current, high PSRR CMOS LDO.

Using CMOS construction, the quiescent current consumed by the WL2803D is typically 150uA over the entire input voltage range, making it attractive for consumer, networking applications that demand high output current. The WL2803D series are available in wide output voltage range version from 1.2V to 3.3V.

The WL2803D series offer thermal shutdown (OTP) and current limit functions, to assure the stability of chip and power system at wrong condition, and it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

The WL2803D regulators are available in DFN2X2-6L packages. Standard products are Pb-free and Halogen-free.

Features


- Input voltage : 2.5V~5.5V
- Output voltage : 3.0V
- Output current : 800mA
- PSRR : 65dB @ 1KHz
- Dropout voltage : 130mV @ $I_{OUT}=0.5A$
- Output noise : 100uV
- Quiescent current : 150uA Typ.

Applications


- LCD TV
- STB
- Computer, Graphic card
- Network communication equipments
- Others portable electronics devices



DFN2X2-6L

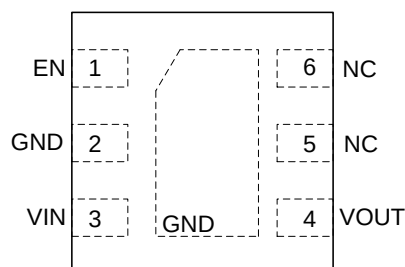

Pin Configuration (Top View)




2803 = Device code
 ** = Voltage code (30: 3.0V)
 Y = Year code
 W = Week code

Marking

Order Information

For detail information, Please refer to page 9.

Typical Application

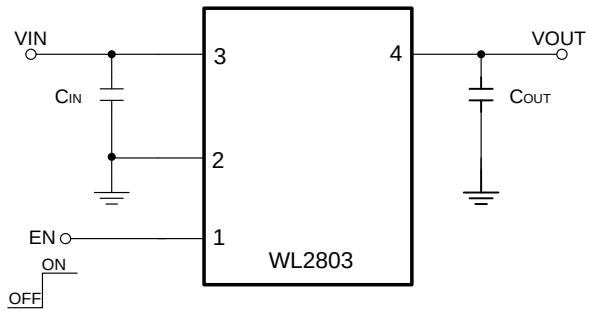


Pin Description

PIN	Symbol	Description
1	EN	Enable, Active High
2	GND	Ground
3	VIN	Input
4	VOUT	Output
5,6	NC	Not connect

	Min.	Typ.	Max.
C_{IN}	2.2uF	4.7uF	
C_{OUT}	1uF	4.7uF	

Block Diagram

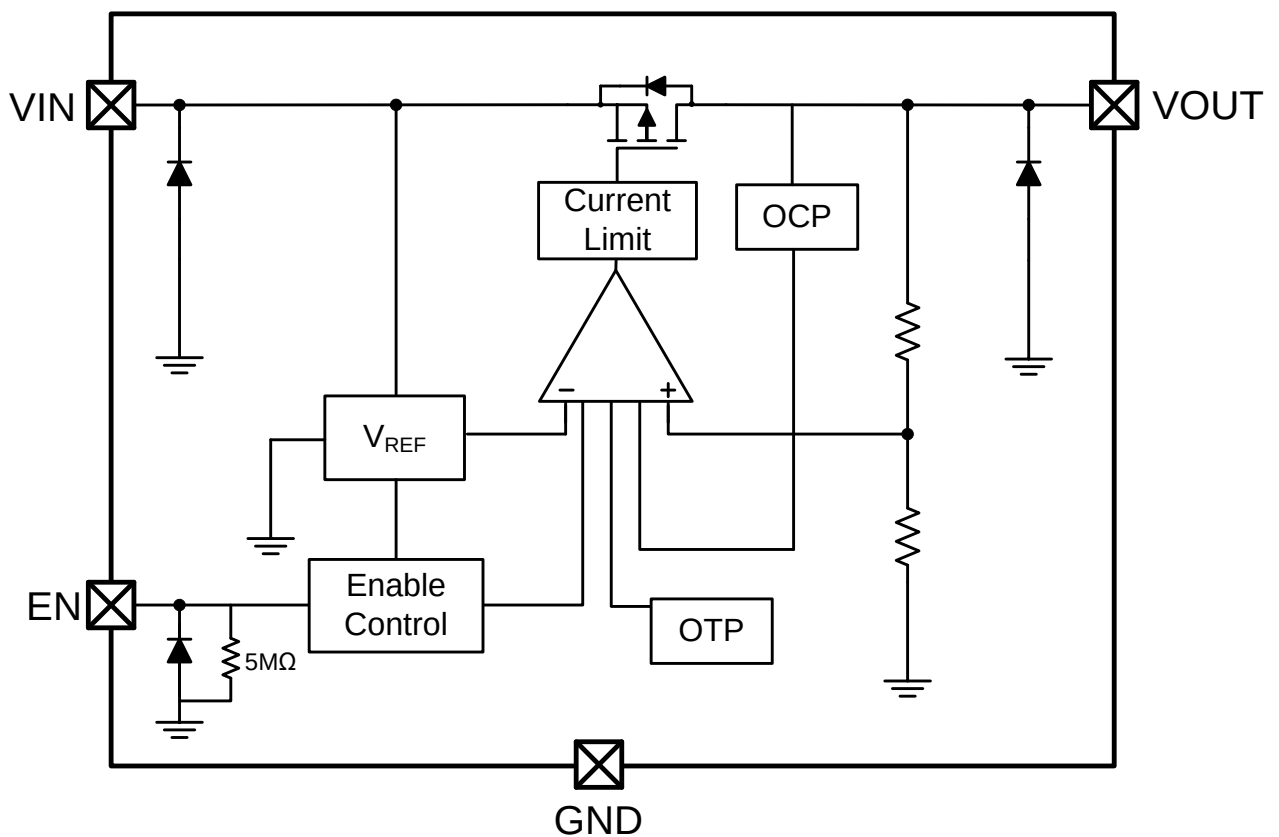

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input voltage range	V_{IN}	-0.3~6.5	V
Output voltage range	V_{OUT}	-0.3~ V_{IN}	V
Power dissipation *1 *3	P_D	0.7	W
Power dissipation *2 *3		0.5	W
Thermal resistance *2	$R_{\theta JA}$	165	°C/W
Junction temperature	T_J	150	°C
Lead temperature(10s)	T_L	260	°C
Storage temperature	T_{stg}	-55 ~ 150	°C
ESD Ratings	HBM	±8000	V
	MM	±400	V

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

*1: Surface mounted on FR-4 Board using 1 square inch pad size, dual side, 1oz copper

*2: Surface mounted on FR-4 board using minimum pad size, 1oz copper

*3: Power dissipation is calculate by $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$


Recommend Operating Ratings

Parameter	Symbol	Value	Unit
Operating Supply voltage	V_{IN}	2.5~5.5	V
Operating Temperature Range	T_{opr}	-40~85	°C


Electronics Characteristics (Ta=25°C, V_{IN}=V_{OUT}+1V, C_{IN}=C_{OUT}=4.7uF, unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _{OUT}	V _{OUT} < 1.5V, V _{IN} =2.5V, I _{OUT} =1mA	V _{OUT} - 30mV	V _{OUT}	V _{OUT} + 30mV	V
		V _{OUT} ≥ 1.5V, I _{OUT} =1mA	V _{OUT} * 0.98	V _{OUT}	V _{OUT} * 1.02	
Dropout Voltage	V _{DROP}	V _{OUT} =V _{OUT} *0.98, I _{OUT} =1A		250	450	mV
Current Limit	I _{LIM}	V _{IN} =5V	1			A
Line Regulation	ΔV _{LINE}	V _{OUT} =3.3V, V _{IN} =4.3~6.0V, I _{OUT} =1mA		5	10	mV
Load Regulation	ΔV _{Load}	V _{OUT} =3.3V, I _{OUT} =1~500mA		10	30	mV
Quiescent Current	I _Q	V _{OUT} =3.3V, I _{OUT} =0		150	200	uA
Shut-down Current	I _{SHDN}	V _{EN} = 0V		0.1	1.0	uA
Power Supply Ripple Rejection	PSRR	V _{IN} =(V _{OUT} +1V) _{DC} +0.2V _{P-P} F=1KHz, I _{OUT} =10mA		65		dB
		V _{IN} =(V _{OUT} +1V) _{DC} +0.2V _{P-P} F=10KHz, I _{OUT} =10mA		58		
Output noise voltage	e _{NO}	10Hz to 100KHz, C _{OUT} =4.7μF		100		μV _{P-P}
EN logic high voltage	V _{ENH}	V _{IN} =5.5V, I _{OUT} =1mA	1.2			V
EN logic low voltage	V _{ENL}	V _{IN} =5.5V, I _{OUT} =0mA			0.4	V
Thermal shutdown threshold	T _{SD}			165		°C
Thermal shutdown hysteresis	ΔT _{SD}			30		°C


Typical characteristics ($T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=V_{\text{OUT}}+1\text{V}$, $C_{\text{IN}}=C_{\text{OUT}}=4.7\mu\text{F}$, unless otherwise noted)

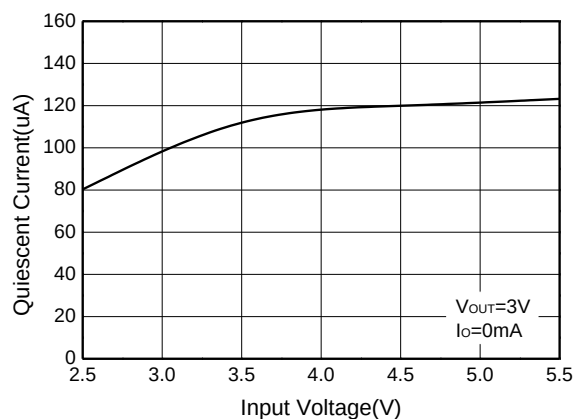


Quiescent current vs. Supply voltage

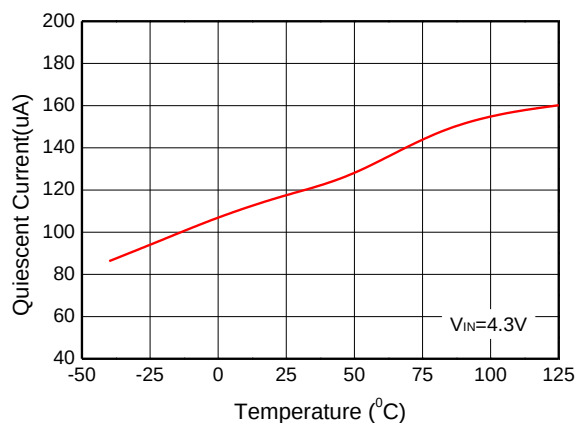


Quiescent current vs. Temperature

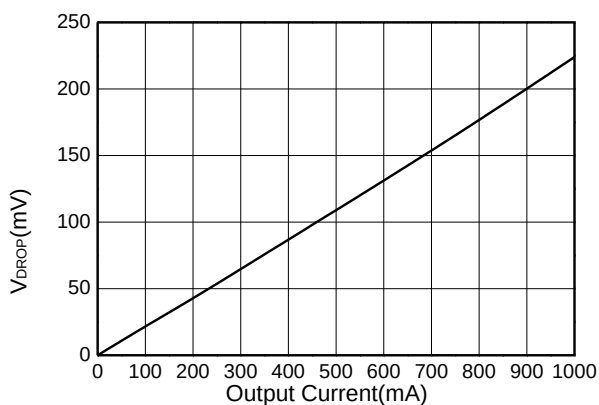


DROP Voltage vs. Output Current

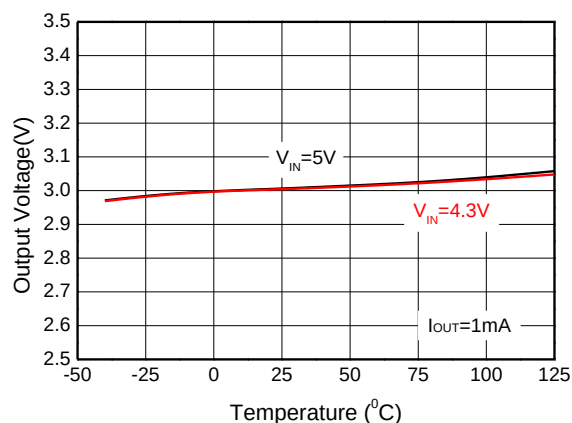


Output Voltage vs. Temperature

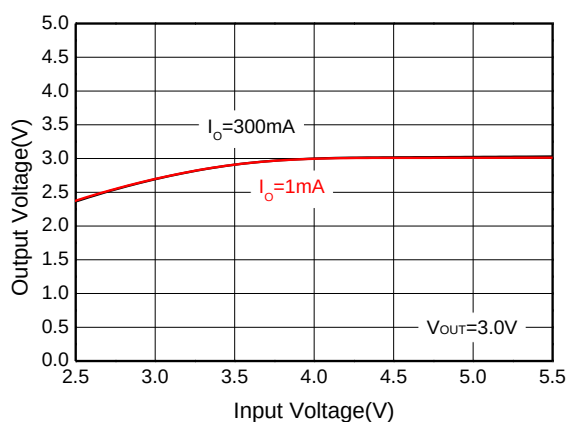


Output voltage vs. Supply voltage

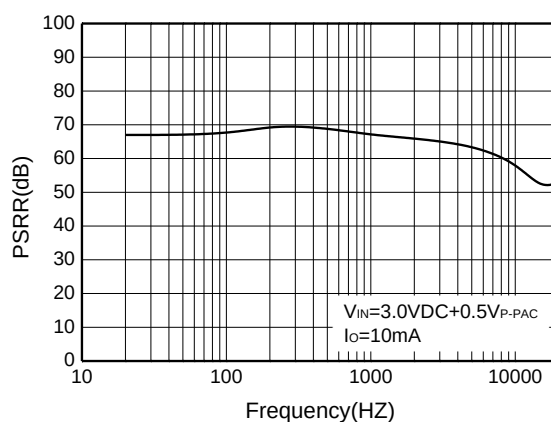


PSRR

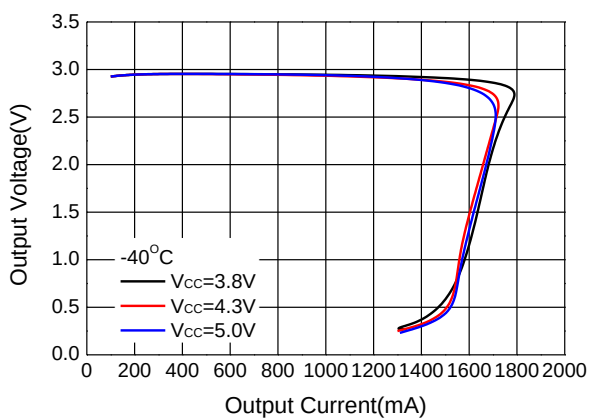




Output voltage vs. Output current

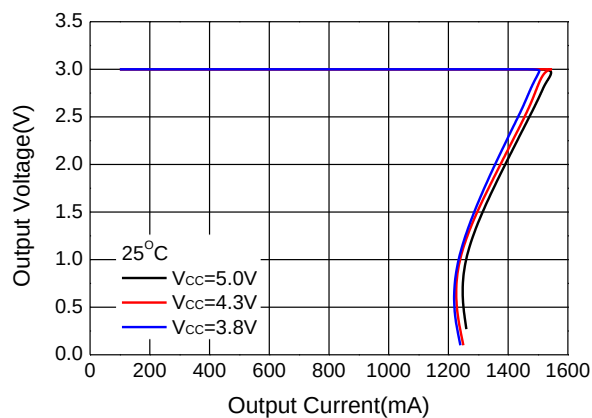


Output voltage vs. Output current

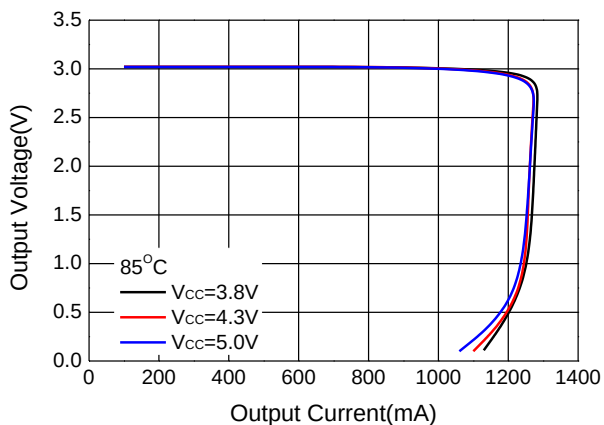

Output voltage vs. Output current

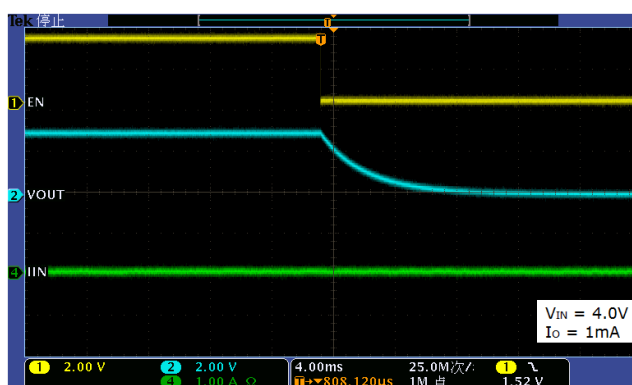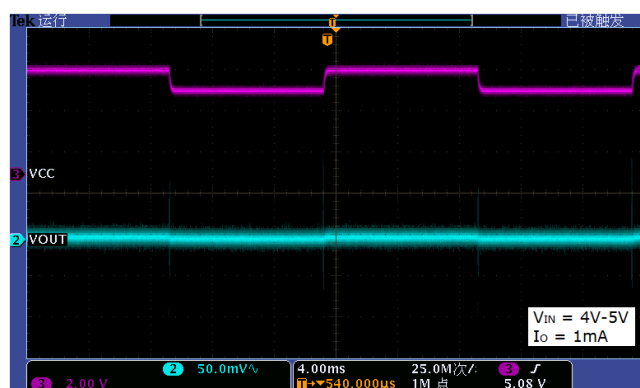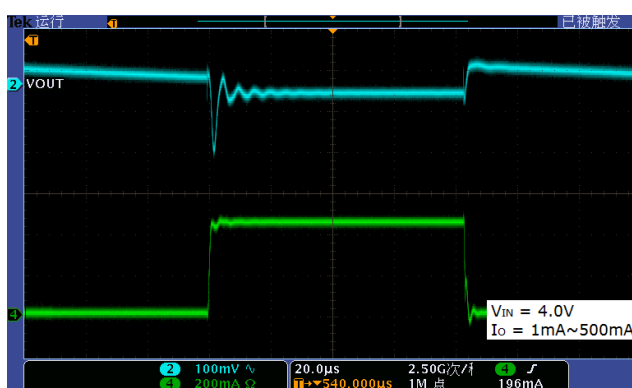
Startup with EN

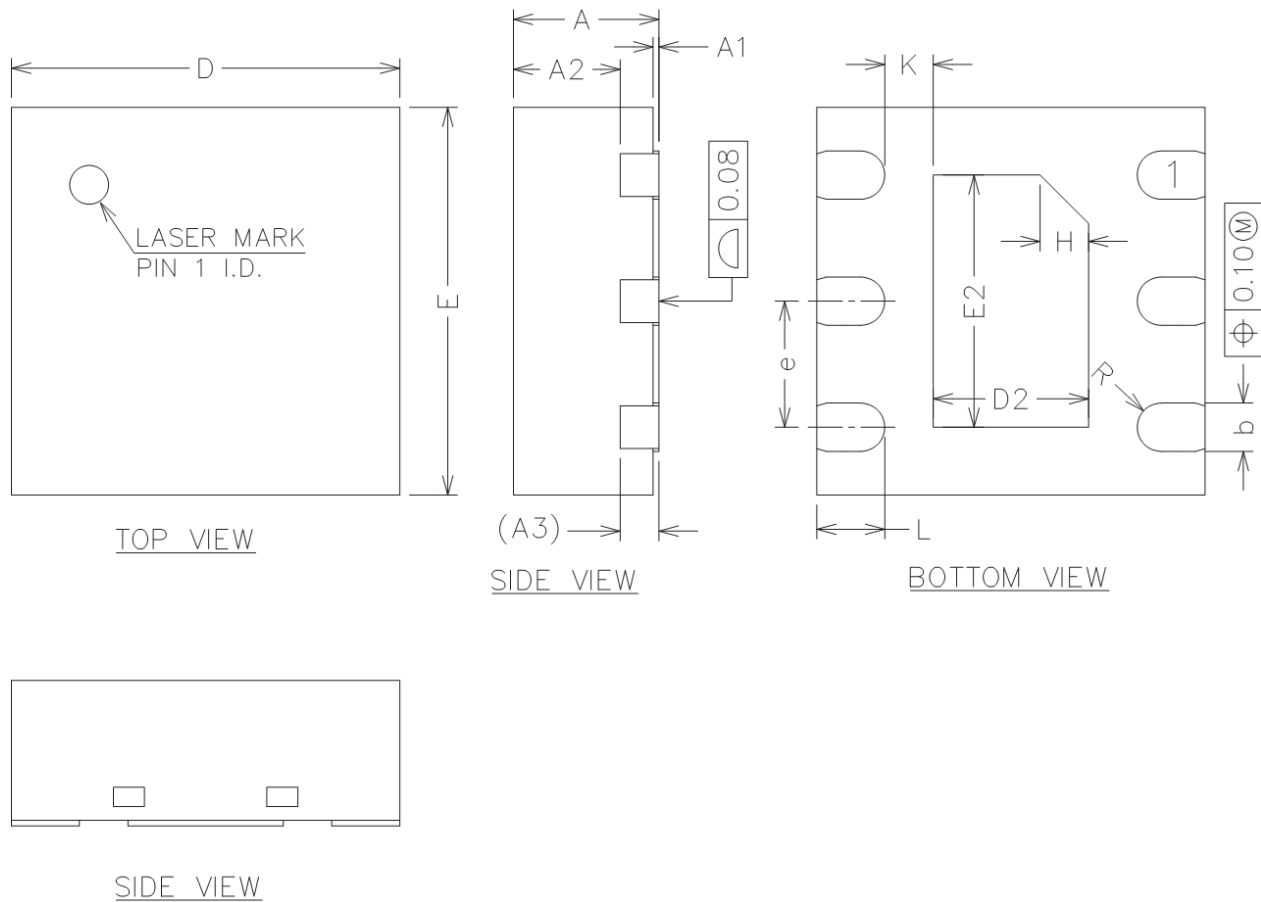Shutdown with EN

Line Regulation

Dropout voltage vs. Output current

Package outline dimensions
DFN2X2-6L


Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	0.700	0.750	0.800
A1	0.000	0.020	0.050
A2	0.500	0.550	0.600
A3	0.200 REF.		
b	0.200	0.250	0.300
D	1.900	2.000	2.100
E	1.900	2.000	2.100
D2	0.700	0.800	0.900
E2	1.200	1.300	1.400
e	0.550	0.650	0.750
H	0.250 REF.		
K	0.200	-	-
L	0.300	0.350	0.400
R	0.110	-	-

ORDER INFORMATION

Ordering No.	V _{OUT} (V)	Package	Marking	Operating Temperature	Shipping
WL2803D30-6/TR	3.0	DFN2X2-6L	2803/30YW	-40 ~ +85°C	3000/Tape and Reel