



## WS78L08 Three-terminal positive voltage regulator

### FEATURES

Maximum Output current

$I_{OM}$ : 0.1 A

Output voltage

$V_o$ : 8 V

Continuous total dissipation


$P_D$ : 0.625W

### TO-92

1. OUT

2. GND

3. IN




### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	0~+150	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_I=14V$ ,  $I_O=40mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	$V_o$	25°C	7.7	8.0	8.3	V
		10.5V ≤ $V_I$ ≤ 23V, $I_O=1mA$ ~40mA	7.6	8.0	8.4	V
		$I_O=1mA$ ~70mA	7.6	8.0	8.4	V
Load Regulation	$\Delta V_o$	$I_O=1mA$ ~100mA	25°C	18	80	mV
		$I_O=1mA$ ~40mA	25°C	10	40	mV
Line regulation	$\Delta V_o$	10.5V ≤ $V_I$ ≤ 23V	25°C	42	175	mV
		11V ≤ $V_I$ ≤ 23V	25°C	36	125	mV
Quiescent Current	$I_Q$		25°C	4	6	mA
Quiescent Current Change	$\Delta I_Q$	11V ≤ $V_I$ ≤ 23V	0~125°C		1.5	mA
	$\Delta I_Q$	1mA ≤ $I_O$ ≤ 40mA	0~125°C		0.1	mA
Output Noise Voltage	$V_N$	10Hz ≤ f ≤ 100kHz	25°C	54		μV
Ripple Rejection	RR	13V ≤ $V_I$ ≤ 23V, f=120Hz	0~125°C	37	46	dB
Dropout Voltage	$V_d$		25°C	1.7		V

### TYPICAL APPLICATION

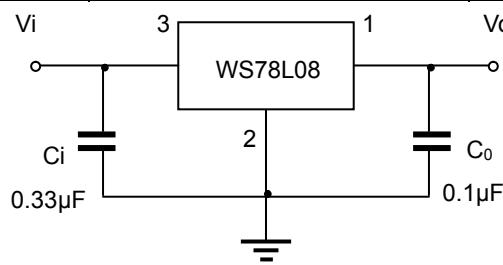

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.