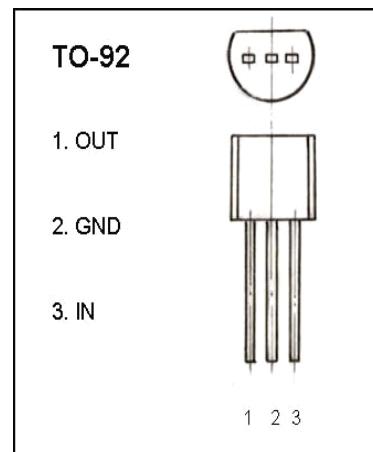
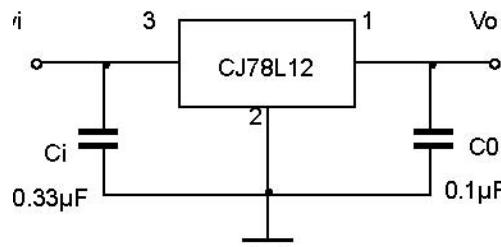


TO-92 Encapsulate Three-terminal Voltage Regulator**WS78L12** Three-terminal positive voltage regulator**FEATURES****Maximum Output current**I<sub>OM</sub>: 0.1A**Output voltage**V<sub>O</sub>: 12 V**Continuous total dissipation**P<sub>D</sub>: 0.625 W**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies unless otherwise specified)

| Parameter                            | Symbol           | Value    | Unit |
|--------------------------------------|------------------|----------|------|
| Input Voltage                        | V <sub>I</sub>   | 35       | V    |
| Operating Junction Temperature Range | T <sub>OPR</sub> | 0-+125   | °C   |
| Storage Temperature Range            | T <sub>STG</sub> | -55-+150 | °C   |

**ELECTRICAL CHARACTERISTICS** (V<sub>I</sub>=19V, I<sub>O</sub>=40mA, C<sub>I</sub>=0.33μF,C<sub>O</sub>=0.1μF, unless otherwise specified )


| Parameter                | Symbol          | Test conditions                                   | MIN     | TYP | MAX  | UNIT |
|--------------------------|-----------------|---|---------|-----|------|------|
| Output voltage           | V <sub>O</sub>  | 25°C  | 11.5    | 12  | 12.5 | V    |
|                          |                 | 14V≤V <sub>I</sub> ≤27V, I <sub>O</sub> =1mA-40mA | 11.4    | 12  | 12.6 | V    |
|                          |                 | I <sub>O</sub> =1mA-70mA                          | 11.4    | 12  | 12.6 | V    |
| Load Regulation          | △V <sub>O</sub> | I <sub>O</sub> =1mA-100mA                         | 25°C    | 22  | 100  | mV   |
|                          |                 | I <sub>O</sub> =1mA-40mA                          | 25°C    | 13  | 50   | mV   |
| Line regulation          | △V <sub>O</sub> | 14.5≤V <sub>I</sub> ≤27V                          | 25°C    | 55  | 250  | mV   |
|                          |                 | 16≤V <sub>I</sub> ≤27V                            | 25°C    | 49  | 200  | mV   |
| Quiescent Current        | I <sub>Q</sub>  |   | 25°C    | 4.3 | 6.5  | mA   |
| Quiescent Current Change | △I <sub>Q</sub> | 16V≤V <sub>I</sub> ≤27V                           | 0-125°C |     | 1.5  | mA   |
|                          | △I <sub>Q</sub> | 1mA≤I <sub>O</sub> ≤40mA                          | 0-125°C |     | 0.1  | mA   |
| Output Noise Voltage     | V <sub>N</sub>  | 10Hz≤f≤100KHz                                     | 25°C    | 70  |      | uV   |
| Ripple Rejection         | RR              | 15V≤V <sub>I</sub> ≤25V, f=120Hz                  | 0-125°C | 37  | 42   | dB   |
| Dropout Voltage          | V <sub>d</sub>  |   | 25°C    | 1.7 |      | V    |

**TYPICAL APPLICATION**


Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

### Typical Characteristics


L78L05/12/24 Output Characteristics

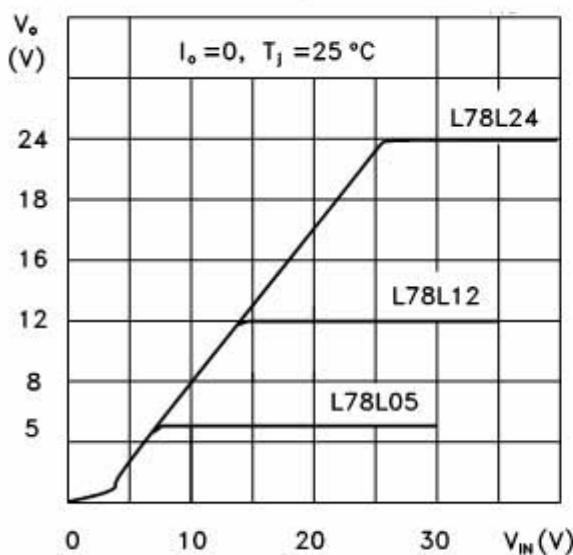

L78L05/12/24 Thermal Shutdown

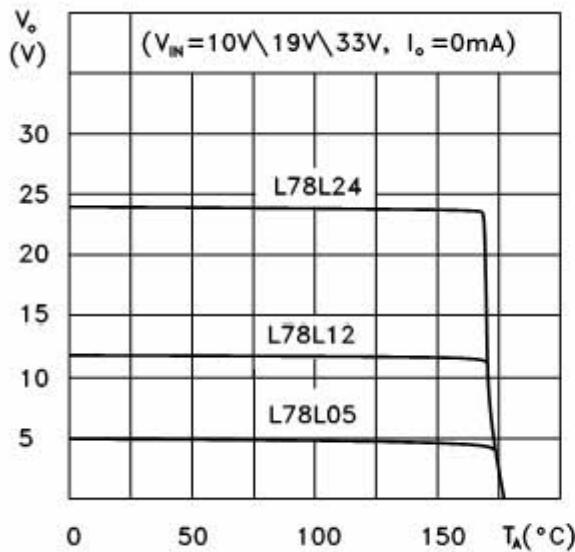


L78L05 Quiescent Current vs Input Voltage

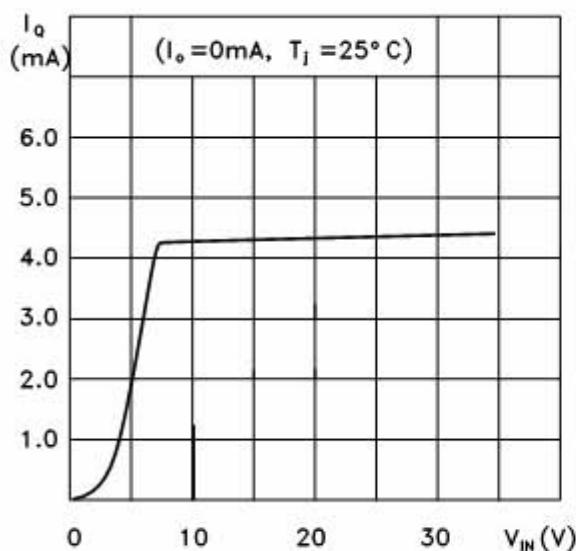

### WS78LXX

L78L05/12/24 Load Characteristics

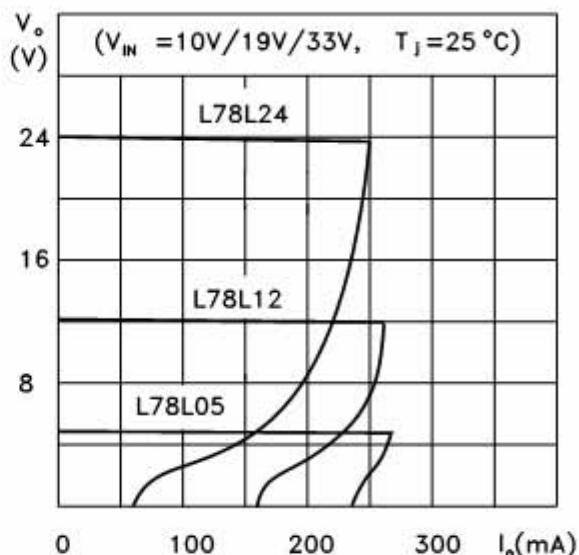

L78L00 Series Short Circuit Output Current

