



Single Coil Hall Effect IC with Thermal Lock Protection and Auto-Restart

Features:

- Operate from 2.4V to 8V supply voltage.
- On-chip Hall sensor.
- Internal bandgap regulator allows temperature compensated operations and a wide operating voltage range.
- Output sinking capability up to 450mA for driving large load.
- Lower current change rate reduces the peak output voltages during switching.
- Available in rugged low profile SIP-4L, SOT-25 packages.
- Built-in Frequency Generator.
- Built-in protection resistance for reverse power supply fault.
- Prevent the fail situation during lock status or high temperature
- Built-in **thermal lock protection** and **auto-restart** function.

General Description:

WSH420 is designed to integrate Hall sensor with two push-pull output drivers and frequency generator together on the same chip, it is suitable for single coil DC brushless motors. It includes a temperature compensated voltage regulator, a differential amplifier, a Hysteresis controller, complementary bi-direction drivers for sinking and driving large current load and an open-collector frequency generator capable of sinking 10mA current load. An on-chip protection diode is implemented to prevent reverse power fault. It also includes coil parts. **You can eliminate all the external components for the function of FG and reverse protection diode.** And built-in **thermal lock protection** and **auto-restart** function will automatically shutdown power at 120°C to prevent the coils be damaged during high temperature and auto-restart at 115°C. It can replace the function of lock protection and auto-restart at low cost.

WSH420 are rated for operation over temperature range from -20° C to 90° C and voltage ranges from 2.4V to 8V.

Winson reserves the right to make changes to improve reliability or manufacturability.



WSH420 Preliminary

Pin Descriptions: (SIP-4L)

Name	P/I/O	Pin#	Description
Vcc	P	1	Positive Power Supply
DOB	O	2	Output Pin #1
DO	O	3	Output Pin #2
Vss	P	4	Ground

Pin Descriptions: (SOT-25)

Name	P/I/O	Pin#	Description
Vcc	P	1	Positive Power Supply
Vss	P	2	Ground
FG	O	3	Frequency Generator
DO	O	4	Output Pin #2
DOB	O	5	Output Pin #1

Absolute Maximum Rating (at Ta=25° C)

Supply Voltage	Vcc	-----	8V
FG breakdown Voltage	Vfg	-----	8V
Magnetic flux density	B	-----	Unlimited
Reverse Protection Voltage	Vr	-----	8V
Output ON Current (continuous)	Ic	-----	450mA
FG ON Current (continuous)	If	-----	10mA
Operating Temperature Range	Ta	-----	(-20°C to +90°C)
Storage Temperature Range	Ts	-----	(-65°C to +150°C)
Package Power Dissipation	Pd	-----	350mw for SOT-25 500mw for SIP-4L 500mw for SIP-5L

Electrical Characteristics: (T=+25° C, Vcc=2.4V to 8V)

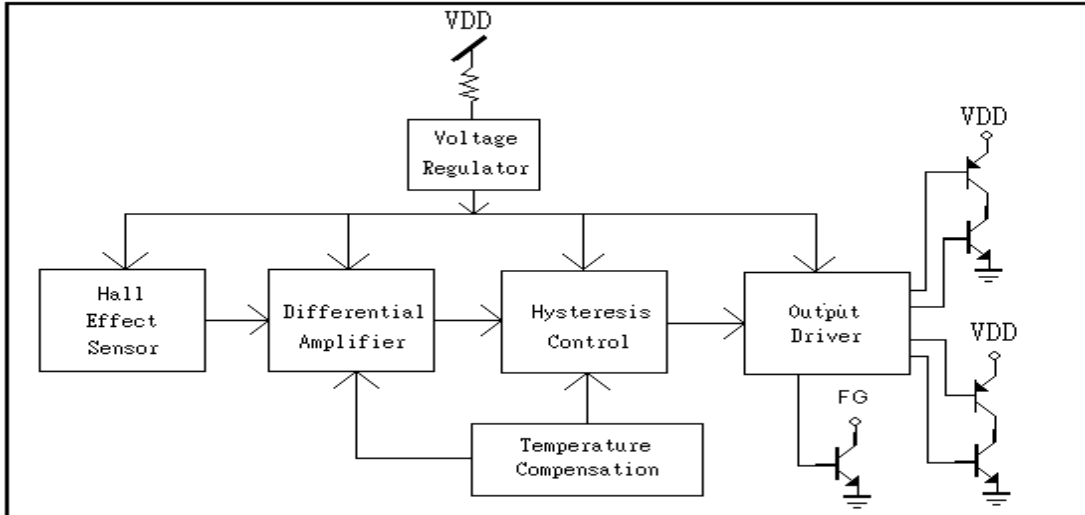
Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Supply Voltage	Vcc	—	2.4	—	8	V
Output Saturation Voltage	Vout(sat) Vdrive+Vsink	Vcc=5V, Io=200mA	—	0.6	1.5	V
FG Saturation Voltage	Vfg(sat)	Vcc=5V, If=5mA B > Bop	—	0.1	0.4	V
Output Leakage Current	Ileakage	Vcc=5V, B < Brp	—	<0.1	10	uA
Supply Current	Isupply	Vcc=5V, Io=200mA FG "ON"	—	27	35	mA

Winson reserves the right to make changes to improve reliability or manufacturability.



WSH420 Preliminary

Function Block:



Magnetic Characteristics:

Characteristics	Symbol	Quantity	Ta= -20°C to +90°C		Unit	
			Min	Typ. Max		
Operate Point	Bop	Grade A		35	70	Gauss
		Grade B		50	100	
Release Point	Brp	Grade A	-70	-35		Gauss
		Grade B	-100	-50		
Hysteresis Window	Bop-Brp			70	150	Gauss

Ordering Information:


SIP -4L: WSH420-XPA <input type="checkbox"/>	Elec. Grade
SOT-25: WSH420-XPD <input type="checkbox"/>	
 Elec. Grade	SIP-4L: 1: A Grade (70 Gauss) 2: B Grade (100 Gauss) SOT-25: 1: A Grade (70 Gauss) 2: B Grade (100 Gauss)

Winson reserves the right to make changes to improve reliability or manufacturability.




WSH420
Preliminary

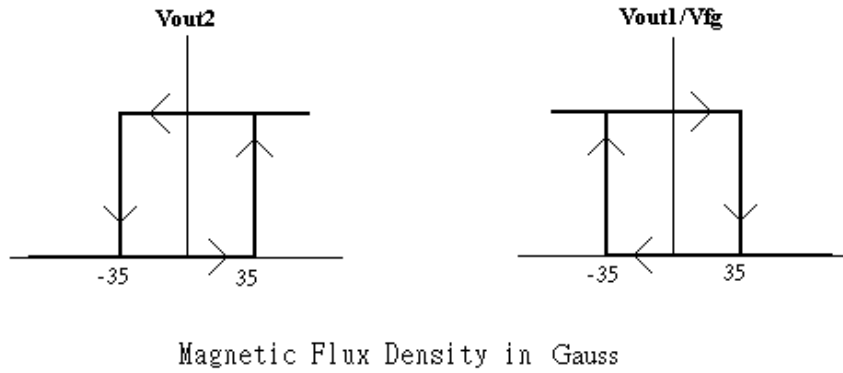WSH420 Complementary Output1/Vfg vs. Output2



Testing Circuit

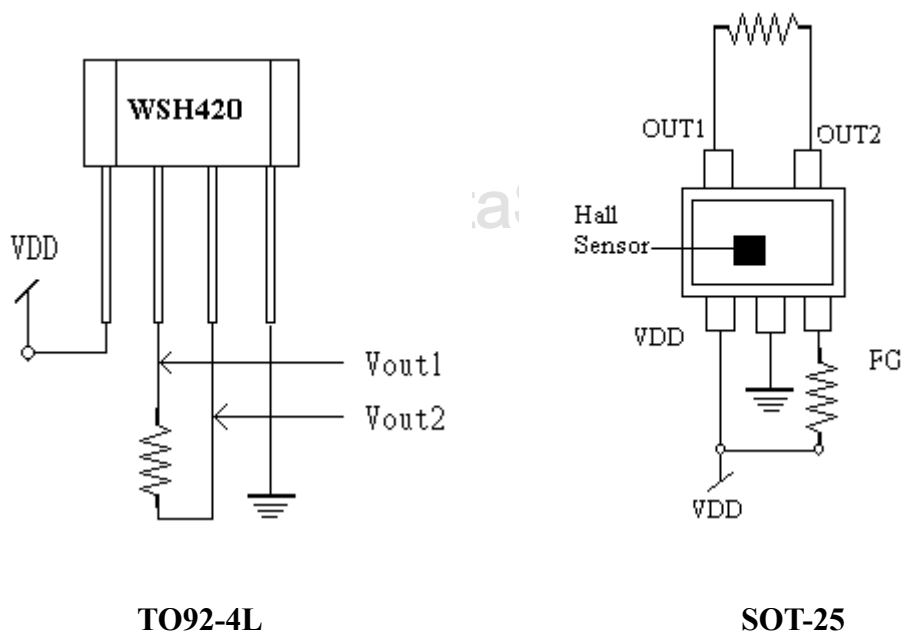

Winson reserves the right to make changes to improve reliability or manufacturability.

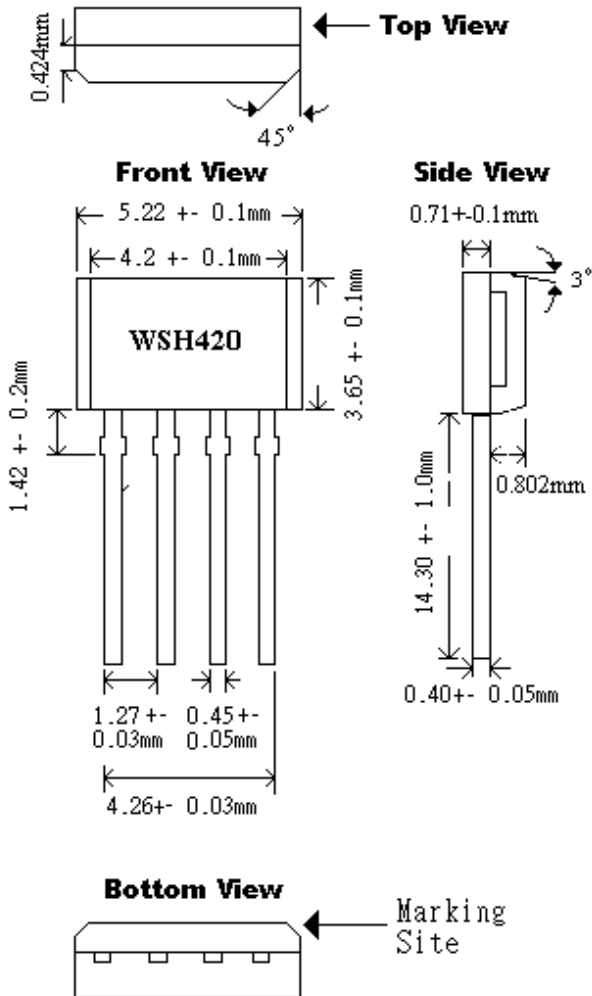


WSH420 Preliminary


Package Information:

1. SIP-4L

Package Dimension



Hall Sensor Location




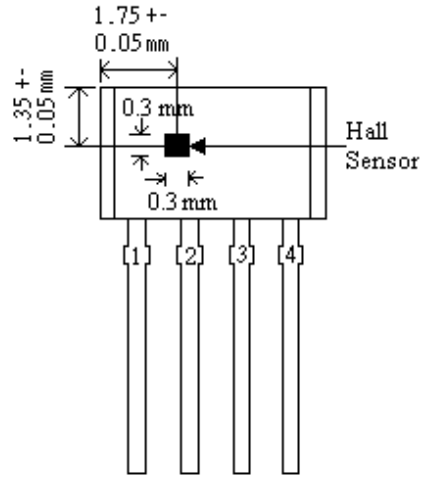


Winson reserves the right to make changes to improve reliability or manufacturability.




WSH420
Preliminary

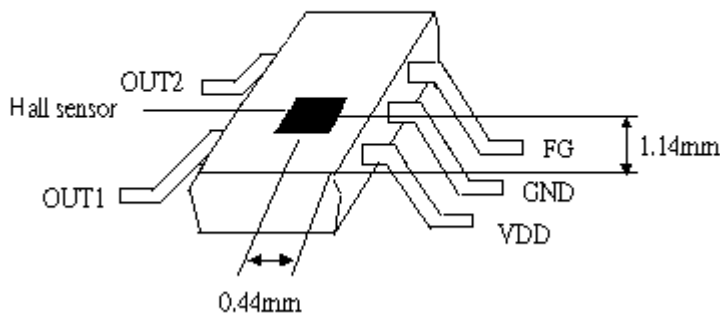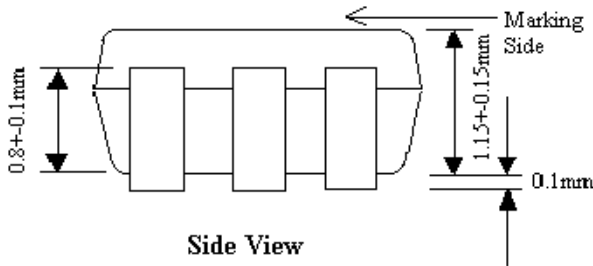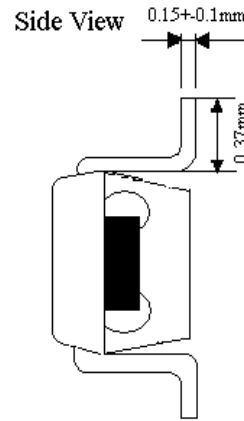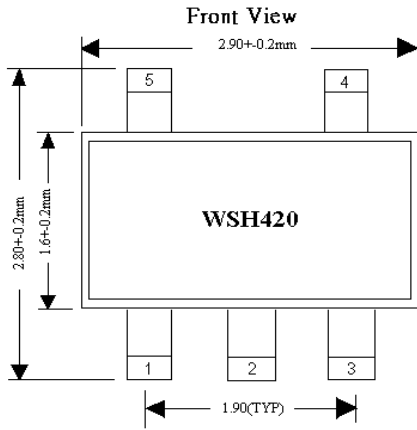
3. SOT-25



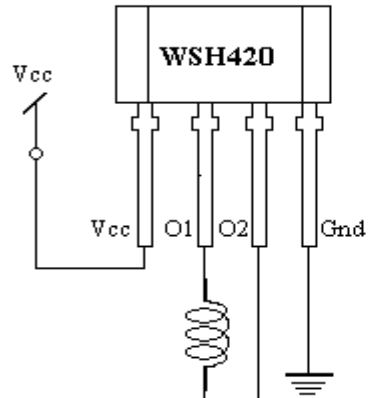Winson reserves the right to make changes to improve reliability or manufacturability.

Application Circuit:
1. SIP-4L

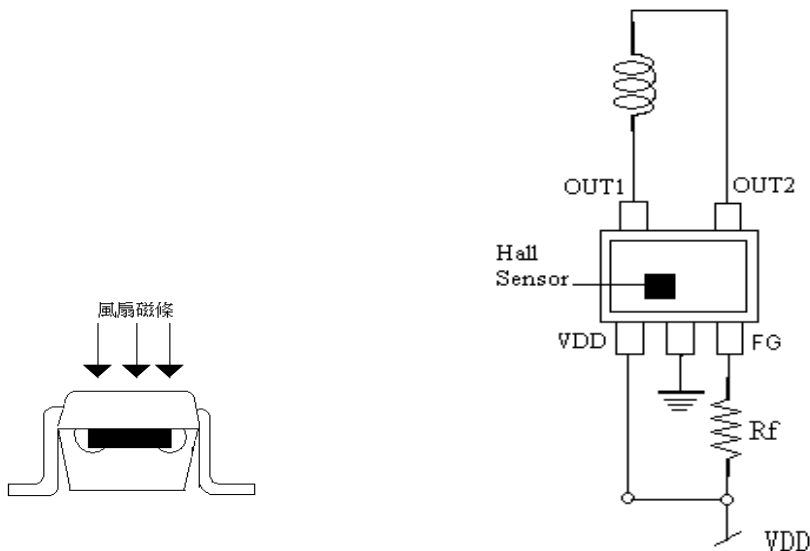Figure 1.

www.DataSheet4U.com

3-1. SOT-25


Winson reserves the right to make changes to improve reliability or manufacturability.