

General Description

The DW01 battery protection IC is designed to protect lithium-ion/polymer battery from damage or degrading the lifetime due to overcharge, overdischarge, and/or overcurrent for one-cell lithium-ion/polymer battery powered systems, such as cellular phones.

The ultra-small package and less required external components make it ideal to integrate the DW01 into the limited space of battery pack. The accurate $\pm 50\text{mV}$ overcharging detection voltage ensures safe and full utilization charging. The very low standby current drains little current from the cell while in storage.

Features

- Reduction in Board Size due to Miniature Package SOT-23-6.
- Ultra-Low Quiescent Current at 3\AA ($V_{cc}=3.9\text{V}$).
- Ultra-Low Power-Down Current at 0.1\AA ($V_{cc}=2.0\text{V}$).
- Precision Overcharge Protection Voltage $4.3\text{V} \pm 50\text{mV}$ for the DW01 Plus
- Load Detection Function during Overcharge Mode.
- Two Detection Levels for Overcurrent Protection.
- Delay times are generated by internal circuits. No external capacitors required.

Ordering Information

DW01

PACKAGE TYPE
SOT-23-6

TEMPERATURE RANGE
 $-40^\circ\text{C} \sim +85^\circ\text{C}$

OVERCHARGE PROTECTION
 $4.3\text{V} \pm 50\text{mV}$

Applications



- Protection IC for One-Cell Lithium-Ion / Lithium-Polymer Battery Pack

Product Name List


Model	Package	Overcharge detection voltage [VoCP] (V)	Overcharge release voltage [VOCR] (V)	Overdischarge detection voltage [VODP] (V)	Overdischarge release voltage [VODR] (V)	Overcurrent detection voltage [Voi1] (mV)
DW01	DW01A	4.300±0.050	4.100±0.050	2.40±0.100	3.0±0.100	150±30

Pin Configuration


Pin No.	Symbol	Description
1	OD	MOSFET gate connection pin for discharge control
2	CS	Input pin for current sense, charger detect
3	OC	MOSFET gate connection pin for charge control
4	TD	Test pin for reduce delay time
5	VCC	Power supply, through a resistor (R1)
6	GND	Ground pin



Functional Block Diagram

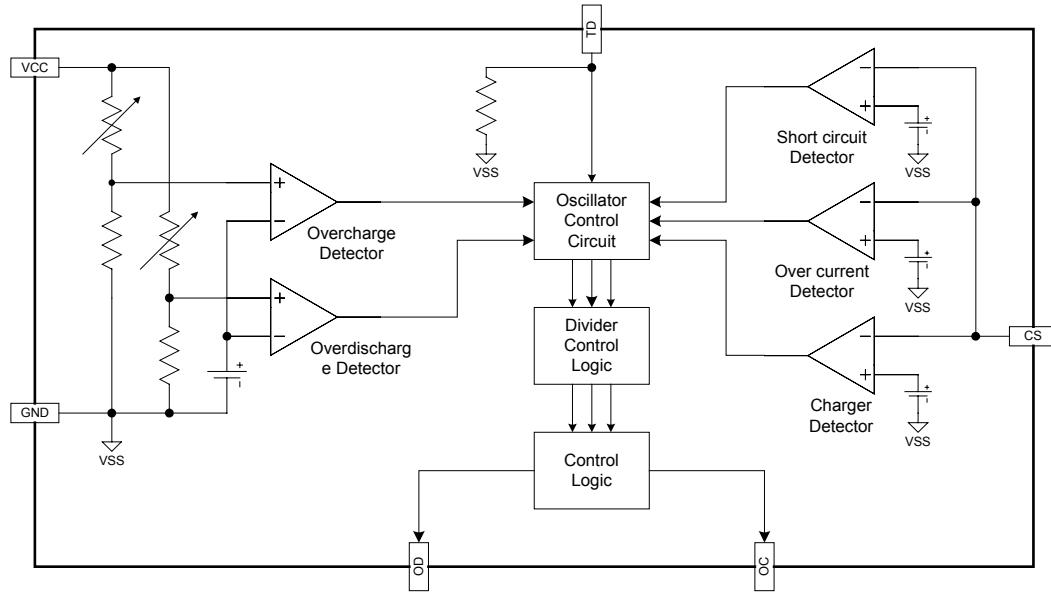

Typical Application Circuit

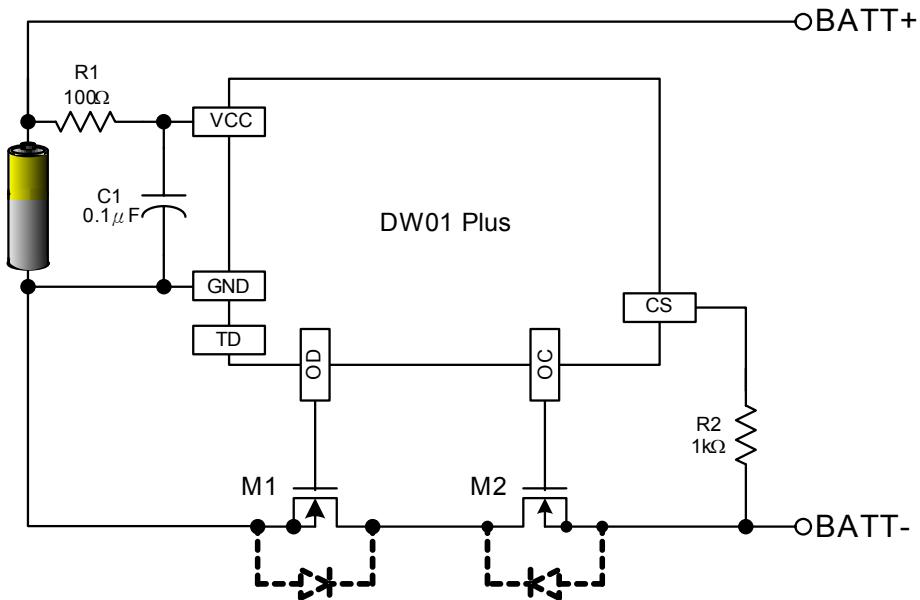

Absolute maximum Ratings (VSS=0V, Ta=25°C unless otherwise specified)

Item	Symbol	Rating	Unit
Input voltage between VDD and VSS *	VDD	VSS-0.3 to VSS+10	V
OC output pin voltage	VOC	VDD-26 to VDD+0.3	V
OD output pin voltage	VOD	VSS-0.3 to VDD+0.3	V
CS input pin voltage	VCS	VDD-26 to VDD+0.3	V
Operating Temperature Range	TOP	-40 to +85	°C
Storage Temperature Range	TST	-40 to +125	°C

Note: DW01 Plus contains a circuit that will protect it from static discharge; but please take special care that no excessive static electricity or voltage which exceeds the limit of the protection circuit will be applied to it.


Electrical Characteristics

(Ta=25°C unless otherwise specified)


PARAMETER	TEST CONDITIONS	SYMBOL	Min	Typ	Max	UNIT
Supply Current	Vcc=3.9V	I _{CC}		3.0	6.0	μA
Power-Down Current	Vcc=2.0V	I _{PD}			0.1	μA
Overcharge Protection Voltage	DW01 Plus	V _{OCP}	4.25	4.30	4.35	V
Overcharge Release Voltage		V _{OCR}	4.05	4.10	4.15	V
Overdischarge Protection Voltage		V _{ODP}	2.30	2.40	2.50	V
Overdischarge Release Voltage		V _{ODR}	2.90	3.00	3.10	V
Overcurrent Protection Voltage		V _{OIP} (V _{OI1})	120	150	180	mV
Short Current Protection Voltage	Vcc=3.6V	V _{SIP} (V _{OI2})	1.25	1.35	1.45	V
Overcharge Delay Time		T _{OC}		80	200	ms
Overdischarge Delay Time	Vcc=3.6V to 2.0V	T _{OD}		20	60	ms
Overcurrent Delay Time (1)	Vcc=3.6V	T _{OI1}		10	20	ms
Overcurrent Delay Time (2)	Vcc=3.6V	T _{OI2}		5	50	μs
Charger Detection Threshold Voltage		V _{CH}	-1.2	-0.7	-0.2	V
OD Pin Output "H" Voltage		V _{DH}	Vcc-0.1	Vcc-0.02		V
OD Pin Output "L" Voltage		V _{DL}		0.1	0.5	V
OC Pin Output "H" Voltage		V _{CH}	Vcc-0.1	Vcc-0.02		V
OC Pin Output "L" Voltage		V _{CL}		0.1	0.5	V

Timing Diagram

1. Overcharge Condition → Load Discharging → Normal Condition

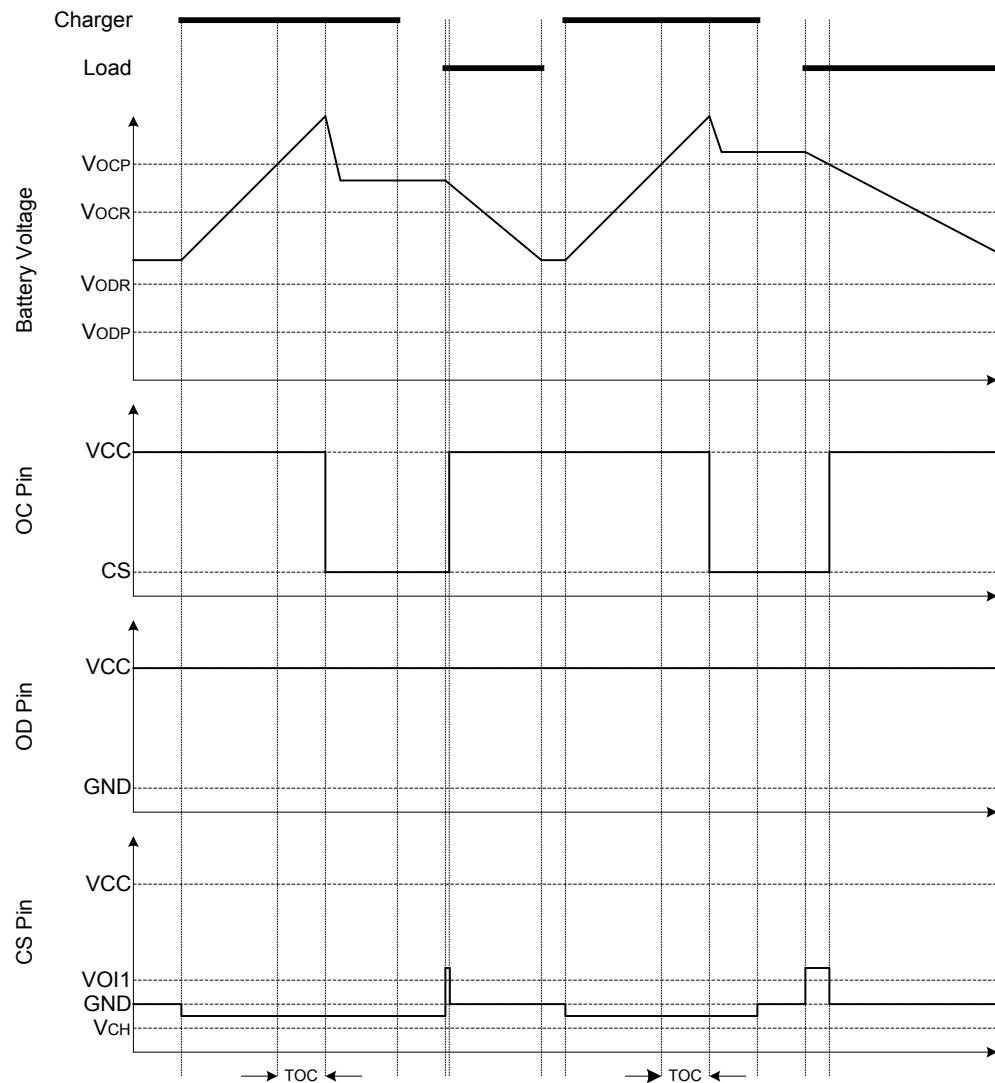

2. Overdischarge Condition → Charging by a Charger → Normal Condition

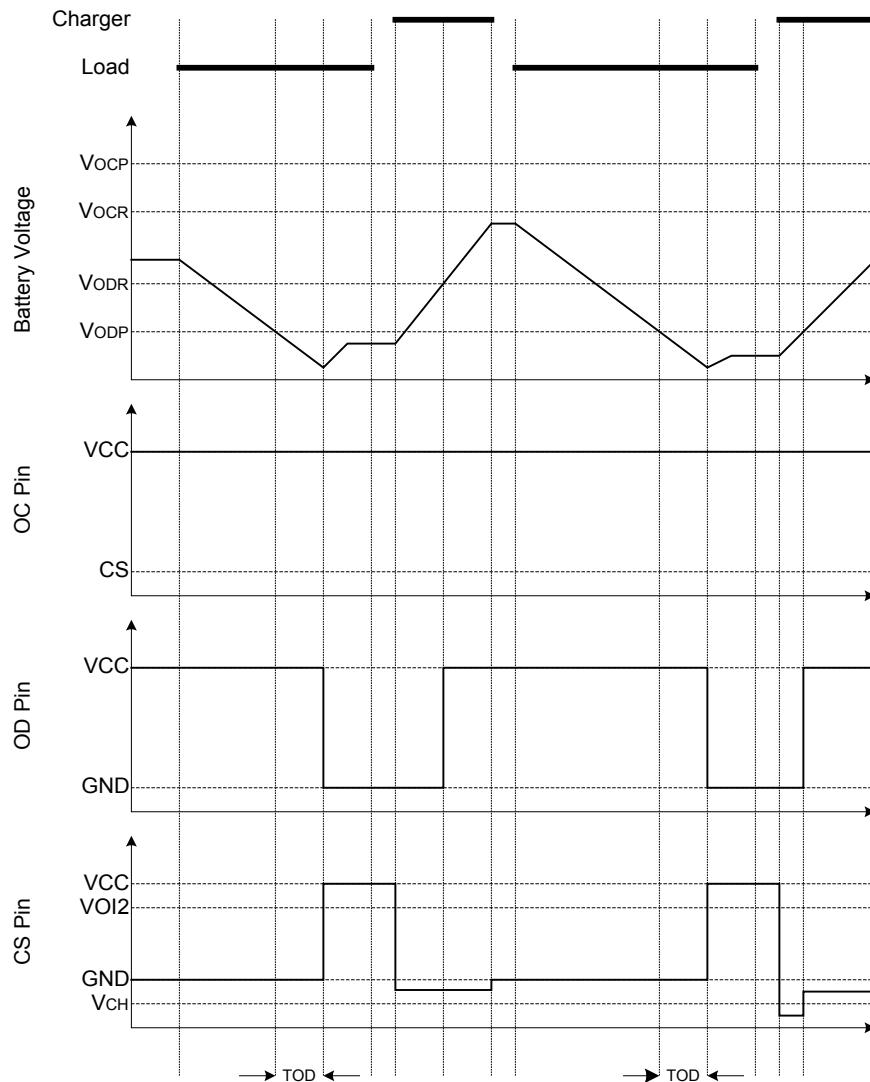

3. Over Current Condition → Normal Condition

