

20A DIN guide PLC blocking filter

X-01240-049

www.DataSheet4U.com



Features

- Protects PLC communications of outdoor interference signals
- Avoids PLC signal propagation to other neighbours houses
- To install besides ICP protection


Electrical parameters

		Single Phase
Rated voltage		300 V
Rated frequency		50 / 60 Hz
Climatic category (DIN 40040)		HPF
Test voltage	Line-Neutral	1800 Vac
	Line/Neutral-PE	-
Max.current		20A
Cable section		10 mm ²

Dimensions

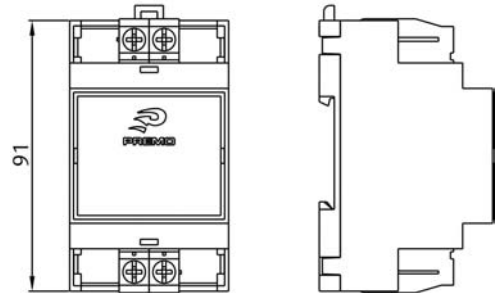

Electrical schematic

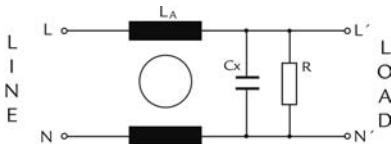

www.DataSheet4U.com