

## CMOS Logic

- ◆ CMOS Logic Triple Inverter (Unbuffered)
- ◆ Operating Voltage Range : 2V ~ 5.5V
- ◆ High Speed Operations :  $t_{pd} = 2.3\text{ns}$  TYP
- ◆ Low Power Consumption : 1 $\mu\text{A}$  (max)
- ◆ MSOP-8B Package


### Description

XC74WL14AASR is Triple Inverter (Unbuffered) manufactured using silicon gate CMOS processes. The small quiescent current, which is one of the features of the CMOS logic, gives way to high speed operations which enables LS-TTL.

With wave forming buffers connected internally, stabilized output can be achieved as the series offers high noise immunity.

As the series is integrated into a mini molded, MSOP-8B package, high density mounting is possible.

### Pin Configuration

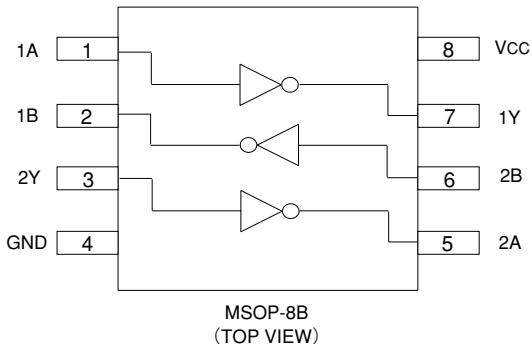

### Applications

- Palmtops
- Digital Equipment

### Features

High Speed Operations :  $t_{pd} = 2.3\text{ns}$  TYP ( $V_{cc}=5\text{V}$ )

Operating Voltage Range: 2V ~ 5.5V

Low Power Consumption: 1 $\mu\text{A}$  (max)

Small Package : MSOP-8B

### Functions

INPUT	OUTPUT
A	Y
H	L
L	H

H = High Level

L = Low Level

### Absolute Maximum Ratings

T<sub>a</sub>=-40°C ~ 85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	V <sub>CC</sub>	-0.5~+6.0	V
Input Voltage	V <sub>IN</sub>	-0.5~+6.0	V
Output Voltage	V <sub>OUT</sub>	-0.5~V <sub>CC</sub> +0.5	V
Input Diode Current	I <sub>IK</sub>	-20	mA
Output Diode Current	I <sub>OK</sub>	±20	mA
Switch Output Current	I <sub>OUT</sub>	±25	mA
V <sub>CC</sub> , GND Current	I <sub>CC</sub> , I <sub>GND</sub>	±50	mA
Power Dissipation (T <sub>a</sub> = 25°C)	P <sub>d</sub>	300	mW
Storage Temperature	T <sub>stg</sub>	-65~+150	°C

Note : Voltage is all Ground standardized.

## ■ Recommended Operating Conditions

PARAMETER	SYMBOL	CONDITIONS	UNITS
Supply Voltage	VCC	2~5.5	V
Input Voltage	VIN	0~5.5	V
Output Voltage	VOUT	0~VCC	V
Operating Temperature	Topr	-40~+85	°C

## ■ DC Electrical Characteristics

PARAMETER	SYMBOL	CONDITIONS		Ta=25°C			Ta=-40~85°C		UNITS
				MIN	TYP	MAX	MIN	MAX	
Input Voltage	VIH	VCC (V)	2.0	1.7	—	—	1.7	—	V
				2.4	—	—	2.4	—	
				4.4	—	—	4.4	—	
	VIL	VCC (V)	2.0	—	—	0.3	—	0.3	V
				—	—	0.6	—	0.6	
				—	—	1.1	—	1.1	
	VOH	VCC (V)	2.0	1.8	2	—	1.8	—	V
				2.7	3	—	2.7	—	
				4.05	4.5	—	4.05	—	
		VCC (V)	3.0	2.58	—	—	2.48	—	V
				3.94	—	—	3.8	—	
Output Voltage	VOL	VCC (V)	2.0	—	—	0.2	—	0.2	V
				—	—	0.3	—	0.3	
				—	—	0.45	—	0.45	
		VCC (V)	4.5	—	—	0.36	—	0.44	V
				—	—	0.36	—	0.44	
	VIN	VCC (V)	3.0	—	—	0.36	—	0.44	V
				—	—	0.45	—	0.45	
				—	—	0.45	—	0.45	
		VCC (V)	4.5	—	—	0.36	—	0.44	
				—	—	0.45	—	0.45	
Input Current	IIN	0~5.5	VIN=VCC or GND	-0.1	—	0.1	-1	1	μA
Quiescent Supply Current	ICC	5.5	VIN=VCC or GND, IOUT=0 μA	—	—	1	—	10	μA

## ■ Switching Electrical Characteristics


(tr=tf=3ns)

PARAMETER	SYMBOL	CL		VCC (V)		CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
							MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	tPLH	15pF	3.3	VCC (V)	5.0	VIN=VCC or GND	—	2.8	7.1	1	8.5	ns
			5.0				—	2.4	5.5	1	6	
		50pF	3.3				—	4.5	10.6	1	12	ns
			5.0				—	3.6	7	1	8	
	tPHL	15pF	3.3	VCC (V)	5.0	VIN=VCC or GND	—	2.7	7.1	1	8.5	ns
			5.0				—	2.2	5.5	1	6	
		50pF	3.3				—	4.2	10.6	1	12	ns
			5.0				—	3.5	7	1	8	
Input Capacitance	CIN	—	5.0				—	2	10	—	10	pF
Power Dissipation Capacitance	Cpd	No Load, f=1MHz				—	16	—	—	—	—	pF

**■Noise Characteristics**

( tr=tf=3ns )

PARAMETER	SYMBOL			CONDITIONS	Ta=25°C			UNITS
		CL	Vcc(V)		MIN	TYP	MAX	
Not functioning output maximum dynamic VOL	VOLP	50pF	5.0		—	0.3	0.8	V
Not functioning output minimum dynamic VOL	VOLV	50pF	5.0		-0.8	-0.3	—	V
Minimum dynamic VIH	VIHD	50pF	5.0		—	—	3.5	V
Maximum dynamic Vil	VILD	50pF	5.0		—	—	1.5	V

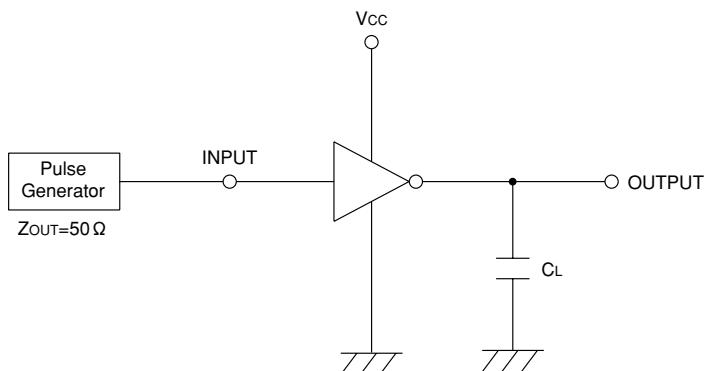**■Typical Application Circuit****■Waveforms**